

WAAS CH 61005 W21A	APP CRS 207°	Rwy ldg TDZE 980 Apt Elev 996
--	------------------------	---

RNAV (GPS) RWY 21



TOCCOA RG LETOURNEAU FLD (TOC)

RNP APCH

Baro-VNAV and VDP NA when using Gainesville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. When local altimeter setting not received, use Gainesville altimeter setting: Increase LPV DA to 1345 feet, LNAV/VNAV DA to 1510 feet, and increase all MDAs 120 feet, increase LNAV/LNAV visibility all Cats ½ SM, LNAV visibility Cats C/D ¾ SM and Circling visibility Cats A/B ¼ SM and Cat C ½ SM. Circling Rwy 9, 27 NA at night.

MISSED APPROACH:
Climb to 5800 direct ZIGIP and on track 295° to TALLE and hold, continue climb-in-hold to 5800.

AWOS-3 119.625	ATLANTA CENTER 134.8 379.95	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

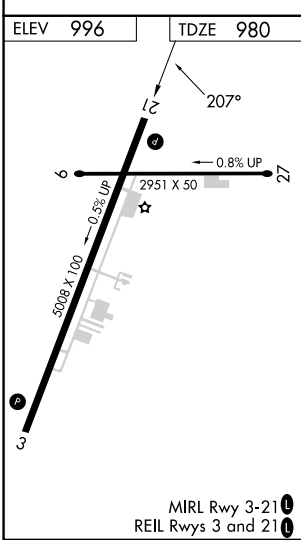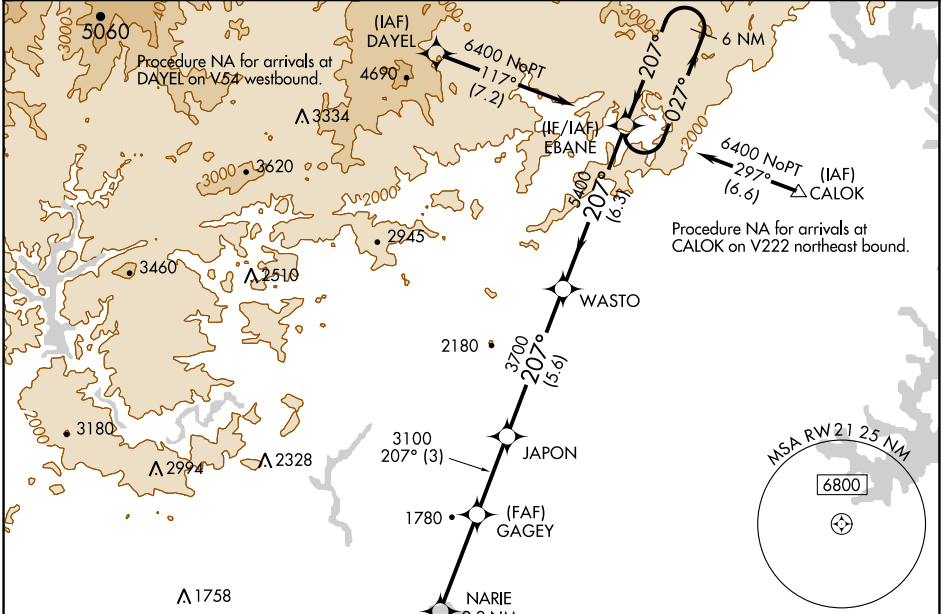

ELEV 996	TDZE 980				
RW21		MISSED APPROACH FIX			
5800 ZIGIP		TALLE			
*1.8 NM to RW21		*INAV only			
NARIE 2.9 NM to RW21		EBANE			
GAGEY 3100		JAPON			
WASTO		6 NM Holding Pattern			
3700		6400			
3100		GP 3.00° TCH 33			
1.8 1.1 NM		3.7 NM			
3.7 NM		3 NM			
5.6 NM		6.3 NM			
A		B		C	
D					
LPV DA		1230-1		250 (300-1)	
LNAV/VNAV DA		1395-1½		415 (400-1½)	
LNAV MDA		1560-1 580 (600-1)		1560-1½ 580 (600-1½)	
CIRCLING		1720-1 724 (800-1)		1760-2¼ 764 (800-2¼) 2480-3 1484 (1500-3)	