



WAAS CH <b>78332</b> <b>W26A</b>	APP CRS <b>261°</b>	Rwy Idg <b>6330</b> TDZE <b>587</b> Apt Elev <b>595</b>
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 26  
SAN MARCOS RGNL (HYI)

▼ Baro-VNAV NA when using New Braunfels altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). When local altimeter setting not received, use New Braunfels altimeter setting and increase all DA 43 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats, and LNAV Cat C/D/E visibility 1/8 mile and Circling Cat C/D visibility 1/4 mile. Circling NA for Cat E SW of Rwy 13-31. DME/DME RNP-0.3 NA. VDP NA with New Braunfels altimeter setting. Helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH:  
Climb to 3000 direct RAJRY and hold.

ATIS ★ <b>120.825</b>	AUSTIN APP CON <b>119.0 370.85</b>	SAN MARCOS TOWER★ <b>126.825 (CTAF) 0</b>	GND CON <b>120.125</b>	CLNC DEL <b>120.125</b>	CLNC DEL <b>121.35</b> (when twr closed)
--------------------------	---------------------------------------	----------------------------------------------	---------------------------	----------------------------	------------------------------------------------

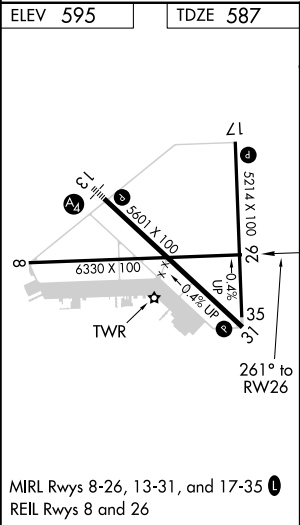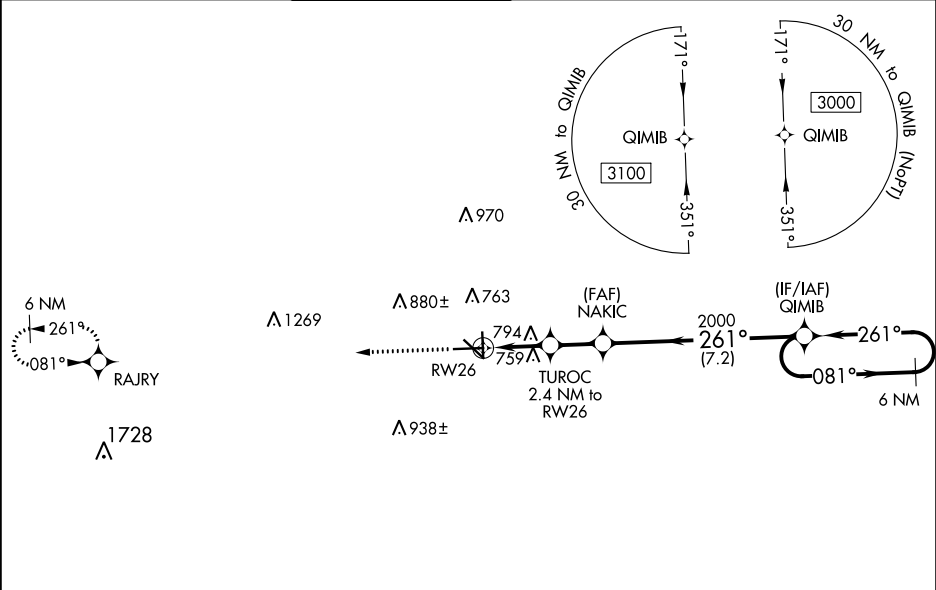

3000	RAJRY	NAKIC	TUROC	QIMIB	6 NM Holding Pattern
*LNAV only.			2.4 NM to RW26		
			*1.3 NM to RW26		
			*1.1 NM		
			*1.9 NM		
			7.2 NM		
					GP 3.00° TCH 55'
CATEGORY	A	B	C	D	E
LPV DA		837-3/4	250 (300-3/4)		
LNAV/VNAV DA		866-7/8	279 (300-7/8)		
LNAV MDA	1060-1	473 (500-1)	1060-1 3/8	473 (500-1 3/8)	
CIRCLING	1080-1 485 (500-1)	1120-1 525 (600-1)	1240-1 3/4 645 (700-1 3/4)	1320-2 1/4 725 (800-2 1/4)	1340-2 3/4 745 (800-2 3/4)

SC-3, 13 JUL 2023 to 10 AUG 2023

SC-3, 13 JUL 2023 to 10 AUG 2023