WAAS CH 56513 W04A	APP CRS 042°	Rwy ldg 7099 TDZE 158 Apt Elev 158

RNAV (GPS) RWY 4

ROCKY MOUNT/WILSON RGNL (RWI)

T A Inop table does not apply to LPV when using local altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). When local altimeter setting not received, use Wayne Exec Jetport altimeter setting and increase LPV DA to 467; increase LNAV/VNAV DA to 601 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. For inop MALSR, increase LNAV Cat A/B visibility to 1 mile. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Wayne Exec Jetport altimeter setting. Rwy 4 helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH: Climb to 2500 direct FENIM and hold.

ASOS	WASHINGTON CENTER	UNICOM
118.875	123.85 279.65	123.05 (CTAF) L

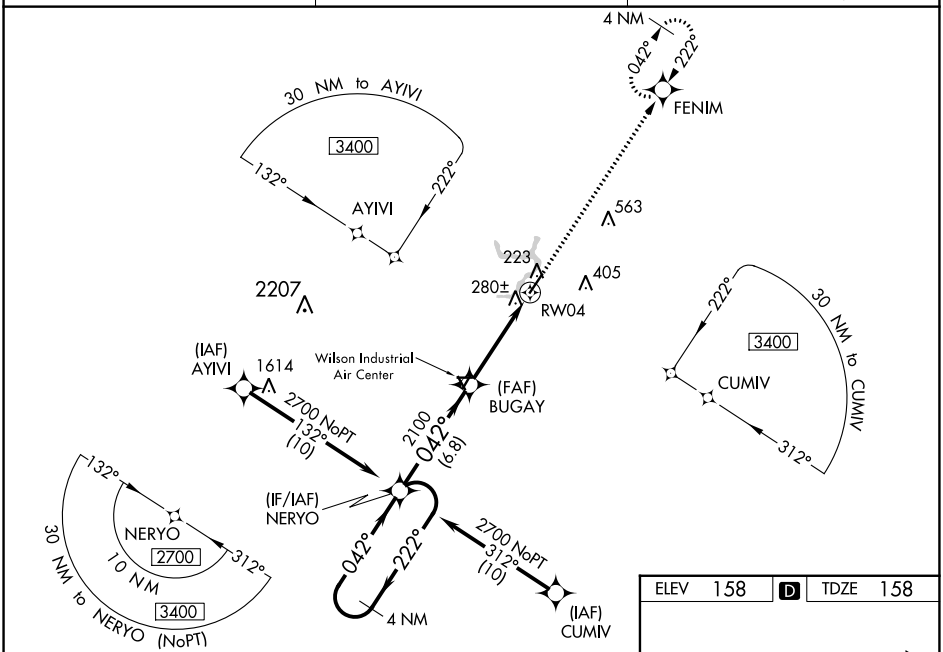

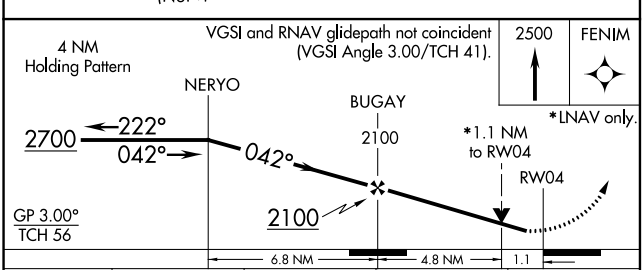

CATEGORY	A	B	C	D
LPV DA	408-¾ 250 (300-¾)			
LNAV/VNAV DA	542-¾ 384 (400-¾)			
LNAV MDA	560-¾ 402 (500-¾)			
C CIRCLING	600-1 442 (500-1)	620-1 462 (500-1)	720-1½ 562 (600-1½)	760-2 602 (700-2)

ELEV 158 D TDZE 158



REIL Rwy 22 L
HIRL Rwy 4-22 L

SE-2, 13 JUL 2023 to 10 AUG 2023

SE-2, 13 JUL 2023 to 10 AUG 2023