


WAAS CH 99739 W12A	APP CRS 124°	Rwy Idg 3500 TDZE 41 Apt Elev 42
--	------------------------	---

RNAV (GPS) RWY 12
TAUNTON MUNI - KING FLD (TAN)

T Circling NA to Rwy's 4 and 22. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). Baro-VNAV NA when using New Bedford altimeter setting. DME/DME RNP-0.3 NA. Rwy 12 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use New Bedford altimeter setting and increase LPV DA to 425 feet, LNAV/VNAV DA to 448 feet and all MDA 40 feet, increase LPV and LNAV/VNAV visibilities all Cats ½ SM, increase LNAV Cat C/D visibility ⅓ SM, and increase Circling Cat D visibility ¼ SM.

MISSED APPROACH: (Do not exceed 210K until INNDY) Climb to 500 then climbing right turn to 3000 direct INNDY and hold, continue climb in hold to 3000.

ASOS 132.675	PROVIDENCE APP CON ★ 128.7 269.525	UNICOM 122.7 (CTAF) ①
------------------------	--	---------------------------------

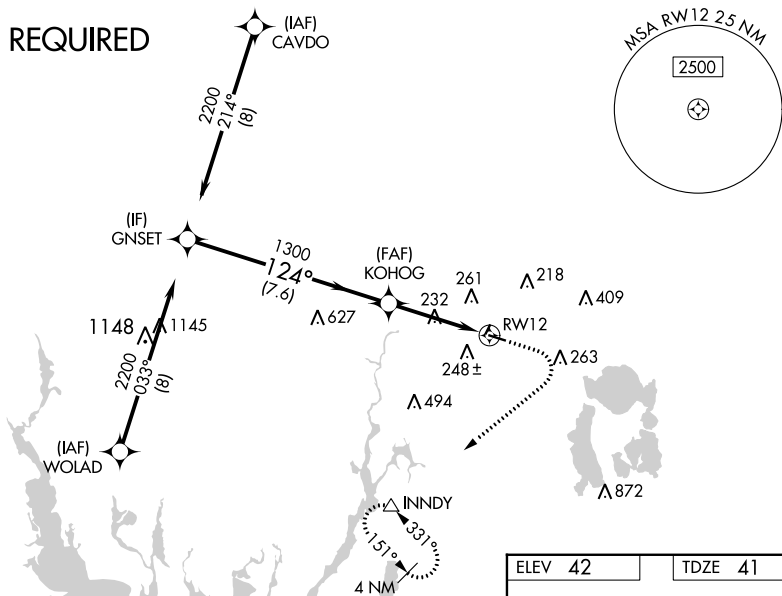

GNSET
2200

KOHOG
1300

124°

GP 3.00°
TCH 57

*1.4 NM to RW12

RW12

7.6 NM

2.4 NM

1.4 NM

INNAV only

CATEGORY	A	B	C	D
LPV DA	391-1½ 350 (400-1½)			
LNAV/VNAV DA	414-1¼ 373 (400-1¼)			
LNAV MDA	540-1 499 (500-1)		540-1¾ 499 (500-1¾)	
CIRCLING	560-1 518 (600-1)	580-1 538 (600-1)	660-1¾ 618 (700-1¾)	760-2¼ 718 (800-2¼)

