
WAAS 7016 Rwy Idg APP CRS CH **97535** 616 **TDZE** 279° W28A Apt Elev 624 RNP APCH - GPS


RNAV (GPS) RWY 28

CHERRY CAPITAL (TVC)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Baro-VNAV and VDP NA with Bellaire altimeter setting. When local altimeter setting not received, Bellaire altimeter setting: increase DA 51 feet and all MDA 60 feet. Increase LPV all Cats visibility 1/8 mile, LNAV/VNAV visibility all Cats 1/4 mile and LNAV Cat B visibility 1/4 mile and C/D visibilities 1/8 mile and Circling Cat B/C visibility 1/4 mile. For inop MALSR, increase all LPV all Cats visibility to 1/4, LNAV Cats C/D visibility to 2 miles. For inop MALSR when using Bellaire adimeter setting, increase LPV all Cats visibility to 1½ miles. To Intop Medak when using behalve adimeter setting, increase LPV all Cats visibility to 1½ mile, LNAV Cats C/D visibility to 2½ miles. #Missed approach requires minimum climb of 237 feet per NM to 2000.



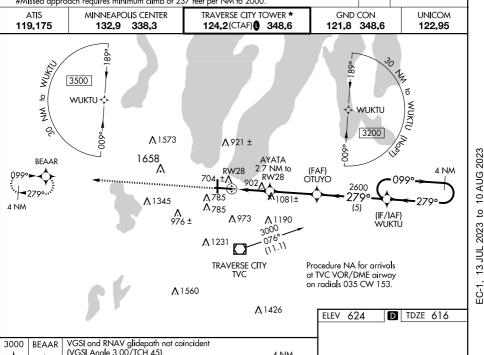

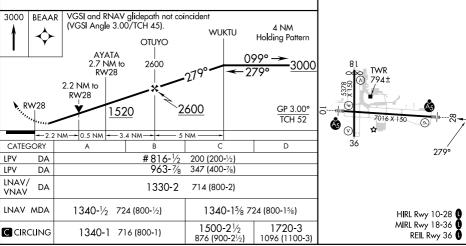

TRAVERSE CITY, MICHIGAN Orig-B 18MAY23

44°44′N-85°35′W

CHERRY CAPITAL (TVC) RNAV (GPS) RWY 28