RNP APCH.

V

A NA


RNAV (GPS) RWY 11

POTOMAC AIRPARK (W35)

MISSED APPROACH: Climb to 3500 direct BAATI and hold.

Procedure NA at night. Rwy 11 helicopter visibility reduction below 1 SM NA. Obtain local altimeter setting on CTAF; when not received, use Martinsburg altimeter setting and increase all MDAs 80 feet and increase LNAV and LP Cat B, C and D visibilities ½ SM and increase Circling Cat B visibility ¼ SM.

POTOMAC APP CON CTAF 126.825 239.025 122.9

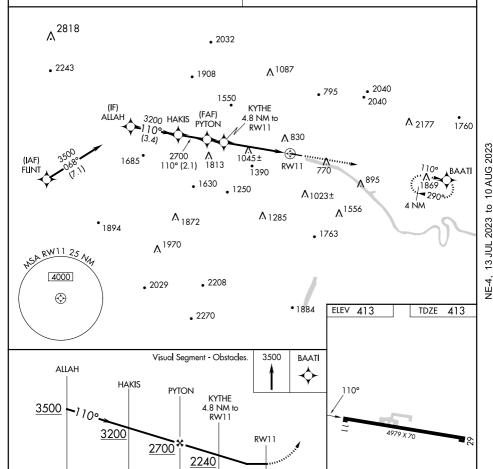

BERKELEY SPRINGS, WEST VIRGINIA Amdt 1A 20JUN19

CATEGORY

LNAV MDA

CIRCLING

MDA

3.4 NM

1300-11/4

1340-11/4

1340-11/4

2.1 NM

887 (900-11/4)

927 (1000-11/4)

927 (1000-11/4)

POTOMAC AIRPARK (W35) RNAV (GPS) RWY 11

MIRL Rwy 11-29

1300-21/2

1340-21/2

1700-3

1287 (1300-3)

887 (900-21/2)

927 (1000-21/2)

1780-3

1367 (1400-3)