

WAAS
CH **56215**
W33A

APP CRS
332°

Rwy Idg
TDZE **11**
Apt Elev **15**

RNAV (GPS) RWY 33

LAKE CHARLES RGNL (LCH)

RNP APCH.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 43°C (109°F). For inop MALSF, increase LNAV/VNAV all Cats visibility to 7/6 and LNAV all Cats visibility to 1 mile.

MALSF

MISSED APPROACH: Climb to 1700 direct ZUKLA and hold.

ATIS
118.75


LAKE CHARLES APP CON*
119.35 353.75

LAKE CHARLES TOWER*
120.7 (CTAF) 257.8

GND CON
121.8

CLNC DEL
126.25

UNICOM
122.95

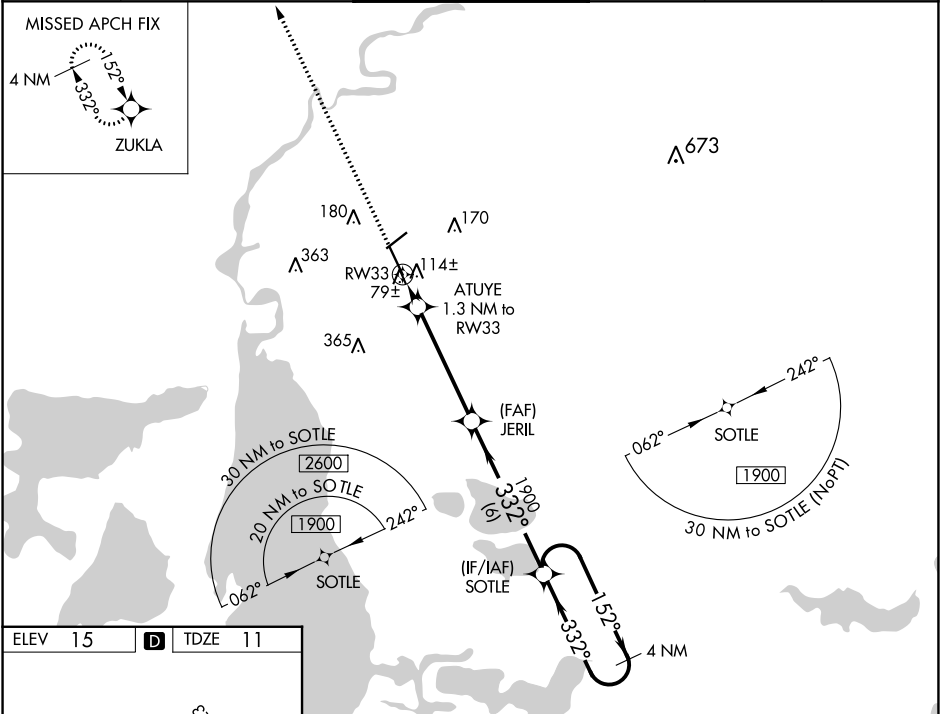

ELEV 15 TDZE 11

1700 ZUKLA

*LNAV only.

ATUYE 1.3 NM to RW33

RW33

JERIL 1900

SOTLE

4 NM Holding Pattern

GP 3.00° TCH 50

1.3 NM

4.5 NM

6 NM

| CATEGORY | A | B | C | D |
|--------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA | | 211-3/4 | 200 (200-3/4) | |
| LNAV/VNAV DA | | 296-3/4 | 285 (300-3/4) | |
| LNAV MDA | | 380-3/4 | 369 (400-3/4) | |
| CIRCLING | 440-1 425 (500-1) | 480-1 465 (500-1) | 580-1½ 565 (600-1½) | 680-2¼ 665 (700-2¼) |