

WAAS
CH **48906**
W04A

APP CRS
041°

Rwy Idg
TDZE **160**
Apt Elev **170**

RNAV (GPS) RWY 4

TUSCALOOSA NTL (TCL)

RNP APCH - GPS.

▼

▲

Circling Rwy 12, 30 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1 1⁄8 SM.

MALSR

AS


IL

AS

IL

MISSED APPROACH: Climb to 2500 direct NENMY and on track 125° to OKW VORTAC and hold.

ASOS 132.825	BIRMINGHAM APP CON 120.15 269.25	TUSCALOOSA TOWER ★ 126.3 (CTAF) 0 256.7	GND CON 121.8 257.95	CLNC DEL 120.775	UNICOM 122.95
------------------------	--	--	--------------------------------	----------------------------	-------------------------

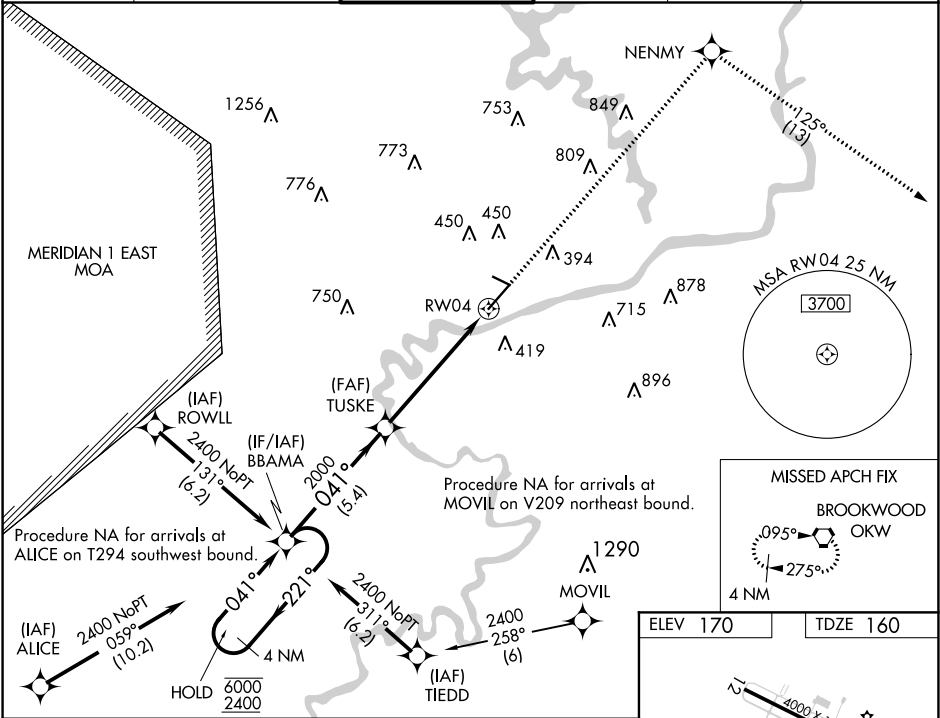

4 NM Holding Pattern BBAMA		TUSKE		RW04	
6000 2400		2000		2400	
GP 3.00° TCH 53		2000		2400	
5.4 NM		4.4 NM		1.2	
CATEGORY	A	B	C	D	
LPV DA		360-1⁄2	200 (200-1⁄2)		
LNAV/VNAV DA		575-3⁄4	415 (500-3⁄4)		
LNAV MDA	600-1⁄2	440 (500-1⁄2)	600-3⁄4	440 (500-3⁄4)	
CIRCLING	720-1 550 (600-1)	800-1 630 (700-1)	960-2 1⁄4 790 (800-2 1⁄4)	960-2 1⁄2 790 (800-2 1⁄2)	

ELEV 170

TDZE 160

4000 X 100

236

2498 X 130

041°

MIRL Rwy 12-30
HIRL Rwy 4-22