
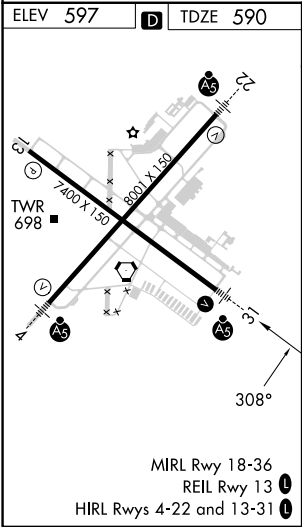


WAAS CH <b>90124</b> <b>W31A</b>	APP CRS <b>308°</b>	Rwy Idg TDZE Apt Elev	<b>7000</b> <b>590</b> <b>597</b>
--	------------------------	-----------------------------	---

**RNAV (GPS) RWY 31**  
ABRAHAM LINCOLN CAPITAL (SPI)

<p><b>⚠</b> DME/DME RNP-0.3 NA. Baro-VNAV NA below -16°C (4°F). When local altimeter setting not received, use Lincoln altimeter setting: increase all DA 57 feet and MDA 60 feet, increase Circling Cat C and D visibility ¼ SM. VDP and ASR Baro-VNAV NA when using Logan County altimeter setting. For inoperative MALSR, increase LPV visibility to ¾ all Cats, increase LNAV/VNAV Cat D visibility to 1.</p>	<p>MALSR </p>	<p>MISSED APPROACH: Climb to 2500 direct JOPOD and hold.</p>
---	-------------------	--

ATIS <b>127.65 270.1</b>	SAINT LOUIS APP CON ★ <b>126.15 323.0</b>	SPRINGFIELD TOWER ★ <b>121.3 (CTAF) 257.8</b>	GND CON <b>121.9 348.6</b>	CLNC DEL <b>121.7</b>	UNICOM <b>122.95</b>
-----------------------------	--	--	-------------------------------	--------------------------	-------------------------

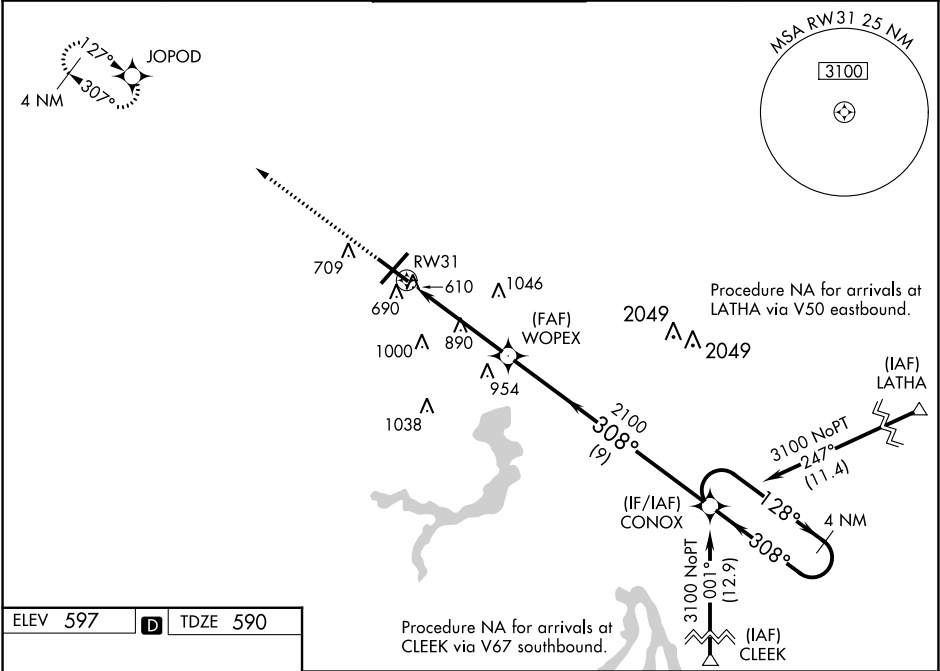

2500	JOPOD	4 NM Holding Pattern			
*LNAV only.					
*1.8 NM to RW31					
RW31					
WOPEX					
CONOX					
CLEEK					
GP 3.00° TCH 55					
CATEGORY	A	B	C	D	
LPV DA	840-½ 250 (300-½)				
LNAV/VNAV DA	865-½ 275 (300-½)				865-¾ 275 (300-¾)
LNAV MDA	1200-½ 610 (700-½)	1200-1¼ 610 (700-1¼)		1200-1½ 610 (700-1½)	
CIRCLING	1200-1 603 (700-1)	1360-2¼ 762 (800-2¼)		1380-2½ 782 (800-2½)	

EC-3, 13 JUL 2023 to 10 AUG 2023

EC-3, 13 JUL 2023 to 10 AUG 2023