
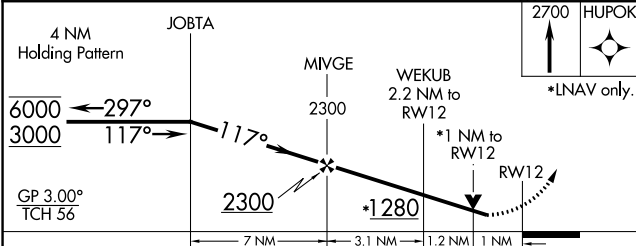


WAAS CH <b>90518</b> <b>W12A</b>	APP CRS <b>117°</b>	Rwy Idg <b>6694</b> TDZE <b>544</b> Apt Elev <b>551</b>
--	------------------------	---


RNAV (GPS) RWY 12  
NORTHWEST ALABAMA RGNL (MISL)

RNP APCH. ▼ Rwy 12 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. When local altimeter setting not received use Decatur altimeter setting and increase LPV DA to 934 feet, LNAV/VNAV DA to 1025 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ SM, LNAV/VNAV all Cats visibility ⅓ SM, LNAV Cat C and D visibility ⅓ SM and Circling Cat C and D visibility ½ SM. Baro-VNAV and VDP NA when using Decatur altimeter setting.	MISSED APPROACH: Climb to 2700 direct HUPOK and hold.
--	--

ASOS <b>119.425</b>	MEMPHIS CENTER <b>120.8 307.0</b>	GCO <b>121.725</b>	UNICOM <b>123.05 (CTAF)</b> 0
------------------------	--------------------------------------	-----------------------	----------------------------------

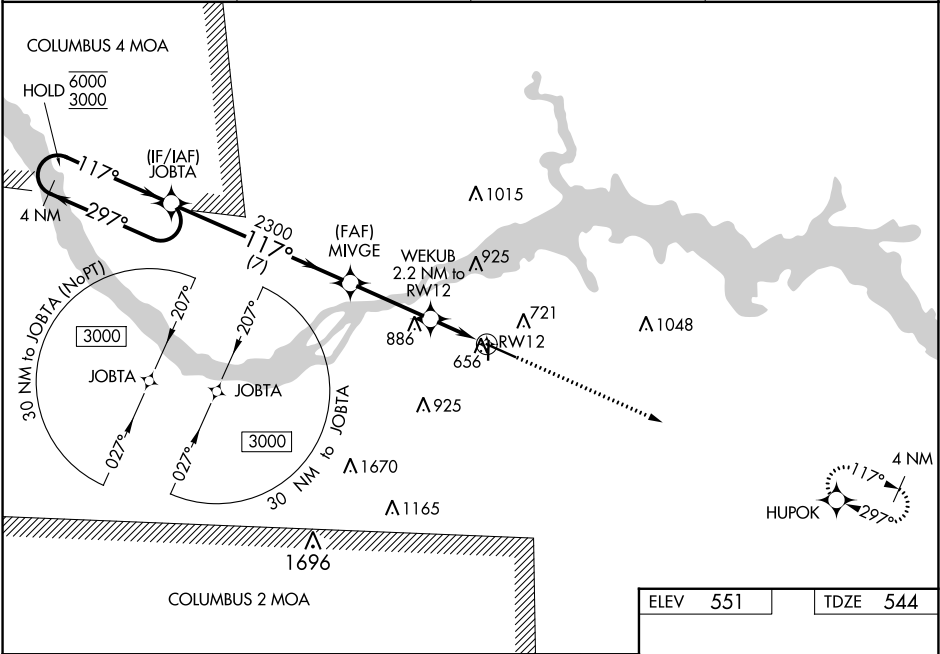

CATEGORY	A	B	C	D
LPV DA		851-1	307 (300-1)	
LNAV/ VNAV DA		942-1¼	398 (400-1¼)	
LNAV MDA		920-1	376 (400-1)	
CIRCLING	1040-1	489 (500-1)	1280-2 729 (800-2)	1280-2¼ 729 (800-2¼)

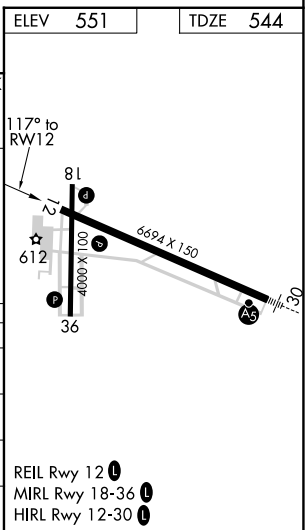

SE-4, 13 JUL 2023 to 10 AUG 2023

SE-4, 13 JUL 2023 to 10 AUG 2023