

WAAS
CH **60914**
W31A

APP CRS
312°

Rwy Idg **7510**
TDZE **43**
Apt Elev **46**

RNAV (GPS) Y RWY 31

CORPUS CHRISTI INTL (CRP)

▼


▲

Procedure NA when Cabaniss Field traffic patterns active. DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). For inop MALSR, increase LPV Cat E visibility to ¾ mile. LNAV/VNAV all Cais visibility to 1 mile, and LNAV Cat E visibility to 1¾ mile.

MALSR

MISSED APPROACH: Climb to 2000 direct ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
----------------------	--	------------------------------------	--------------------------------	---------------------------

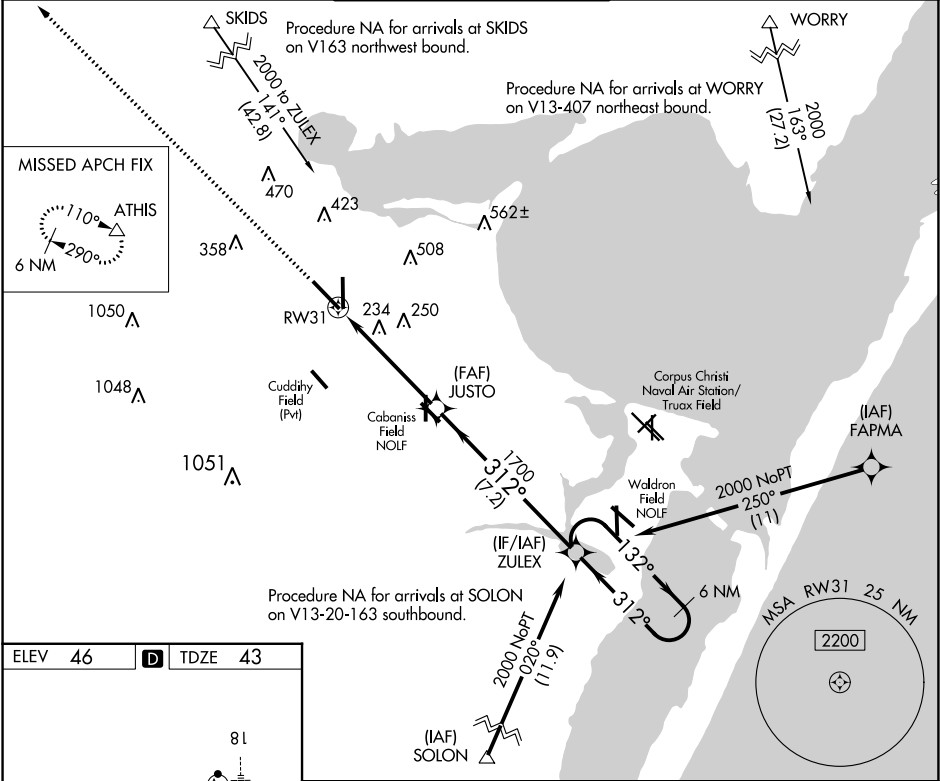

ELEV 46 D TDZE 43

HIRL Rwy 13-31 and 18-36

<div>2000</div> <div>↑</div>		<div>ATHIS</div> <div>△</div>		<div>JUSTO</div> <div>1700</div>		<div>ZULEX</div> <div>1700</div>		<div>6 NM Holding Pattern</div> <div>132°</div> <div>2000</div>	
*LNAV only.		*1.3 NM to RW31		312°		← 312°		GP 3.00° TCH 50	
<div>RW31</div>		<div>1.3 NM</div>		<div>3.8 NM</div>		<div>7.2 NM</div>			
CATEGORY	A		B		C		D		E
LPV DA			243-½		200 (200-½)				
LNAV/VNAV DA			356-⅝		313 (400-⅝)				
LNAV MDA	500-½		457 (500-½)		500-⅞		457 (500-⅞)		
CIRCLING	500-1 454 (500-1)		580-1 534 (600-1)		820-2¼ 774 (800-2¼)		820-2½ 774 (800-2½)		820-2¾ 774 (800-2¾)

SC-3, 13 JUL 2023 to 10 AUG 2023

SC-3, 13 JUL 2023 to 10 AUG 2023