

WAAS CH 70627 W12A	APP CRS 120°	Rwy Idg TDZE 680 Apt Elev 682
--	------------------------	---



RNAV (GPS) RWY 12

DECATUR (DEC)

DME/DME RNP-0.3 NA. Procedure NA at night. Helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Lincoln altimeter setting and increase all MDA 80 feet, increase LP Cat C and D visibility ¼ SM, LNAV Cat C and D visibility ⅓ SM, and Circling Cat C and D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZOBSE and hold.

ATIS 126.35	CHAMPAIGN APP CON* 132.85 290.225	DECATUR TOWER* 118.9 (CTAF) 0 291.775	GND CON 121.75 291.775	UNICOM 122.95
-----------------------	---	---	----------------------------------	-------------------------

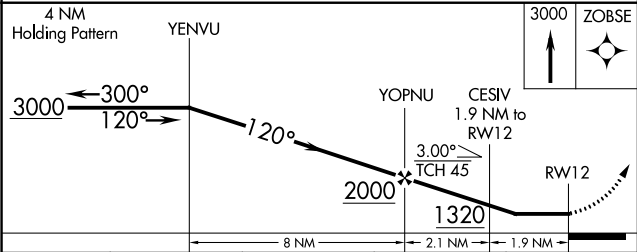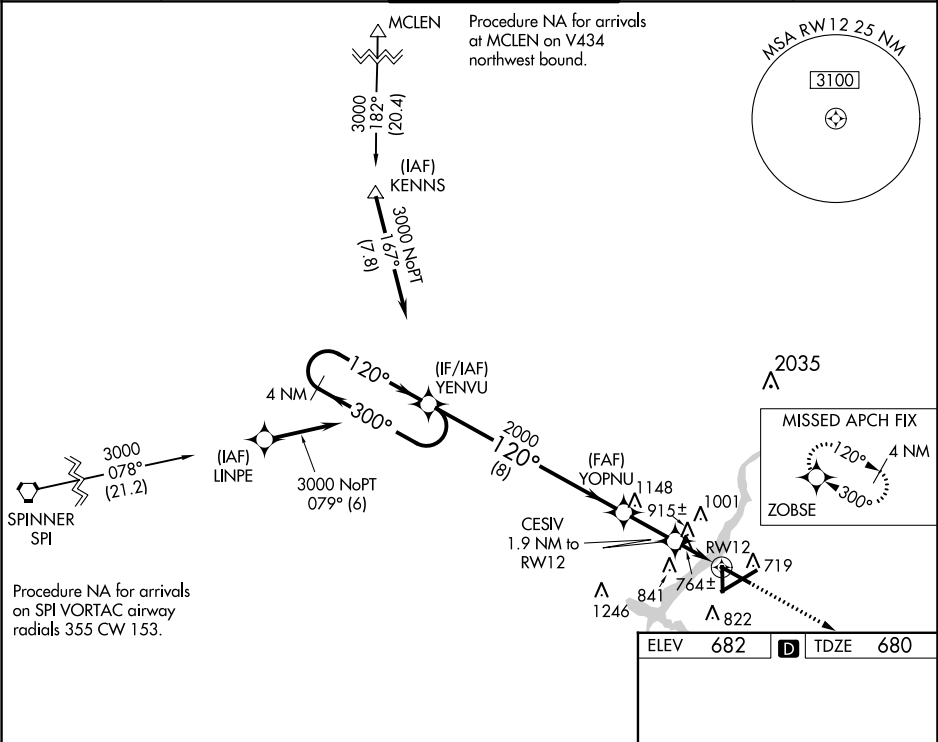

CATEGORY	A	B	C	D
LP MDA	1020-1 340 (400-1)			
LNAV MDA	1180-1 500 (500-1)	1180-1 500 (500-1)	1180-1 500 (500-1)	1180-1 500 (500-1)
CIRCLING	1200-1 518 (600-1)	1240-1 558 (600-1)	1360-2 678 (700-2)	1360-2 678 (700-2)

ELEV 682 TDZE 680

REIL Rwy 36
HIRL Rwy 6-24
MIRL Rwy 12-30 and 18-36