


WAAS CH <b>53617</b> <b>W14A</b>	APP CRS <b>139°</b>	Rwy Idg <b>5608</b> TDZE <b>21</b> Apt Elev <b>24</b>
--	------------------------	---

**RNAV (GPS) RWY 14**  
ARANSAS COUNTY (RKP)


Baro-VNAV NA when using Ingleside altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Ingleside altimeter setting and increase all DA 33 feet and all MDA 40 feet increase LNAV/VNAV all Cats visibility ¼ mile. VDP NA with Ingleside altimeter setting.

**MISSED APPROACH:**  
Climb to 2000 direct PITYI and hold.

ASOS <b>119.275</b>	CORPUS APP CON <b>120.9 348.725</b>	CLNC DEL <b>121.7</b>	UNICOM <b>123.05 (CTAF) 0</b>
------------------------	--	--------------------------	----------------------------------

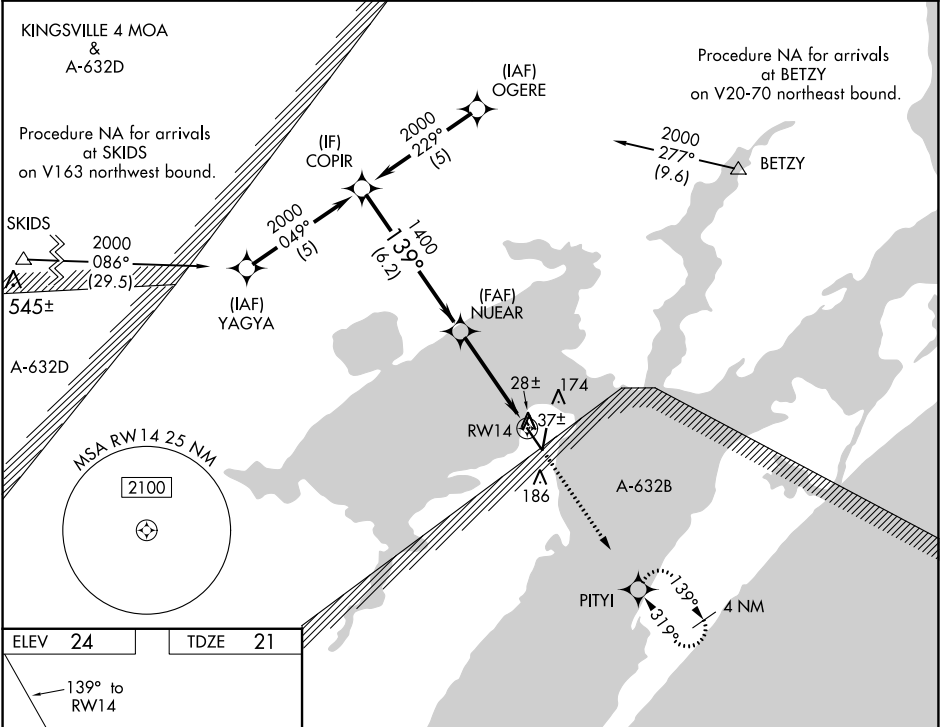

ELEV <b>24</b>	TDZE <b>21</b>
----------------	----------------

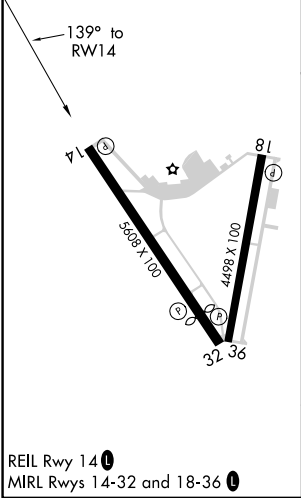

Procedure	Turn NA	COPIR	* LNAV only	2000	PITYI
	2000	NUEAR		1400	
	GP 3.00°			1400	
	TCH 35				
		6.2 NM	3.3 NM	0.9 NM	
CATEGORY	A	B	C	D	
LPV DA	271-1	250 (300-1)		NA	
LNAV/VNAV DA	378-1¼	357 (400-1¼)		NA	
LNAV MDA	320-1	299 (300-1)		NA	
CIRCLING	500-1	476 (500-1)	500-1½	476 (500-1½)	NA

SC-3, 13 JUL 2023 to 10 AUG 2023

SC-3, 13 JUL 2023 to 10 AUG 2023