

| | | |
|--|------------------------|--|
| WAAS CH 70511 W10A | APP CRS 096° | Rwy ldg 6498 TDZE 609 Apt Elev 609 |
|--|------------------------|--|

RNAV (GPS) RWY 10

DELTA COUNTY (ESC)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2500 direct
ZUMAB and hold.

| | | |
|----------------------------|-------------------------------------|-------------------------------|
| AWOS-3PT 121.425 | MINNEAPOLIS CENTER 127.65 | UNICOM 122.8 (CTAF) |
|----------------------------|-------------------------------------|-------------------------------|

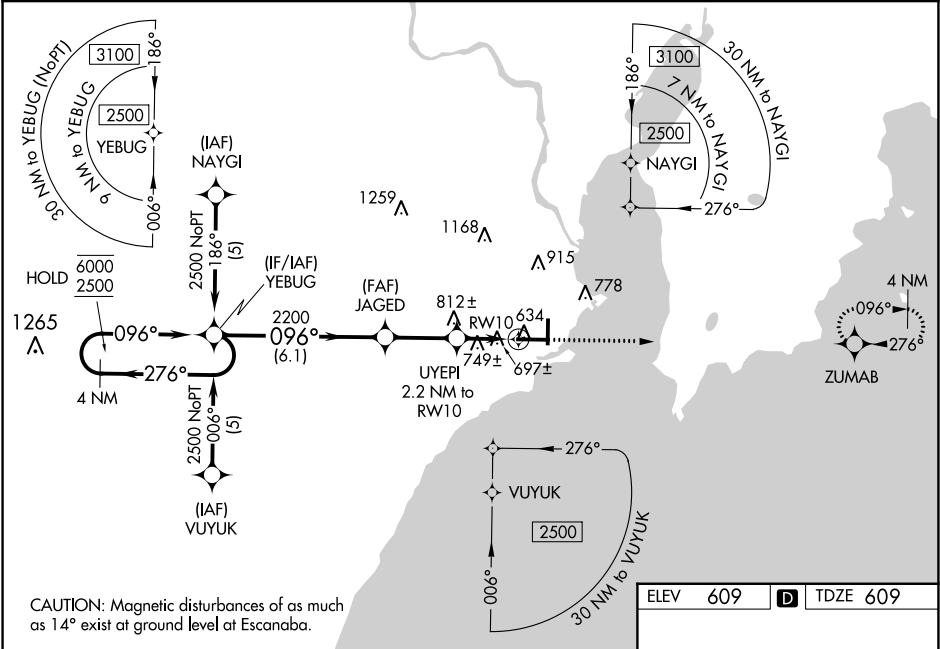

| | | | | | | |
|----------------------|-----------------------|-----------------------|-----------------------|---------------------------|-------------|-------|
| 4 NM Holding Pattern | | YBUG | JAGED | UYEPI 2.2 NM to RWY 10 | 2500 | ZUMAB |
| 6000 2500 | | 276° 096° | 096° | 2200 | 1360 | |
| GP 3.00° TCH 56 | | 6.1 NM | 2.6 NM | 1.2 NM | 1 NM | |
| CATEGORY | A | B | C | D | | |
| LPV DA | 809-½ | | 200 (200-½) | | | |
| LNAV/VNAV DA | 967-⅝ | | 358 (400-⅝) | | | |
| LNAV MDA | 1000-½ | | 1000-⅝ | | 391 (400-⅝) | |
| CIRCLING | 1060-1 451 (500-1) | 1080-1 471 (500-1) | 1280-2 671 (700-2) | 1480-2¾ 871 (900-2¾) | | |

ELEV 609 TDZE 609

HIRL Rwy 10-28

MIRL Rwy 1-19

REIL Rws 1 and 28