



| | | | |
|--|------------------------|-----------------------------|---|
| WAAS CH 49210 W14A | APP CRS 138° | Rwy Idg TDZE Apt Elev | 4000 1039 1039 |
|--|------------------------|-----------------------------|---|

RNAV (GPS) RWY 14

BENSON MUNI (BBB)

| | |
|--|---|
| RNP APCH. | MISSED APPROACH: Climb to 2700 direct FETUD and hold. |
| <div><div><div>▼</div><div>▲</div></div><div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Appleton altimeter setting. When local altimeter setting not received, use Appleton altimeter setting and increase all DA and MDA 40 feet.</div></div> | |

| | | |
|-------------------------|--|---------------------------------|
| AWOS-3 118.45 | MINNEAPOLIS CENTER 125.5 323.1 | UNICOM 122.8 (CTAF) 0 |
|-------------------------|--|---------------------------------|

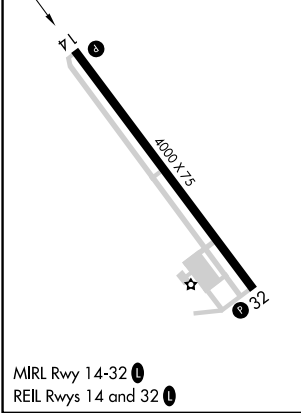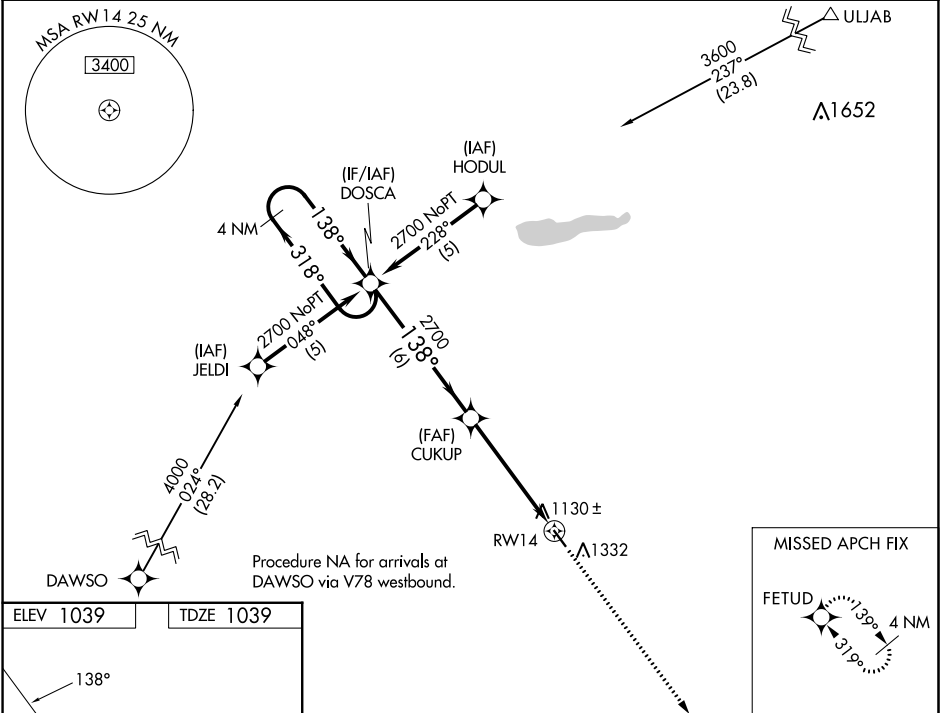

| | | | | | |
|----------------------|---------|--------------|----|-------------------|-------|
| DOSCA | | CUKUP | | 2700 | FETUD |
| 4 NM Holding Pattern | | | | ↑ | ✧ |
| 2700 ← 318° | | 138° → | | * 1.5 NM to RWY14 | |
| 138° → | | 2700 | | * LNAV only | |
| GP 3.00° | | 6 NM | | RWY14 | |
| TCH 40 | | 3.5 NM | | 1.5 | |
| CATEGORY | A | B | C | D | |
| LPV DA | 1382-1¼ | 343 (400-1¼) | NA | | |
| LNAV/VNAV DA | 1426-1½ | 387 (400-1½) | NA | | |
| LNAV MDA | 1540-1 | 501 (600-1) | NA | | |

NC-1, 13 JUL 2023 to 10 AUG 2023

NC-1, 13 JUL 2023 to 10 AUG 2023