

WAAS CH <b>97515</b> <b>W13A</b>	APP CRS <b>132°</b>	Rwy Idg TDZE Apt Elev	<b>7510</b> <b>46</b> <b>46</b>
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) Y RWY 13

CORPUS CHRISTI INTL (CRP)

⚠




⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C (31°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSRL increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cats C/D/E visibility to RVR 5500. \*\*RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSRL

MISSED APPROACH: Climb to 500 then climbing right turn to 2000 direct SOLON and hold.

ATIS <b>126.8</b>	CORPUS APP CON <b>120.9 348.725</b>	CORPUS TOWER <b>119.4 257.8</b>	GND CON <b>121.9 269.15</b>	CLNC DEL <b>118.55</b>
----------------------	--	------------------------------------	--------------------------------	---------------------------

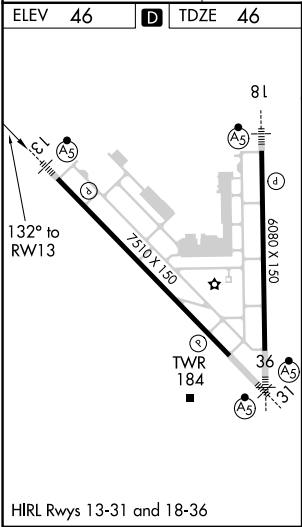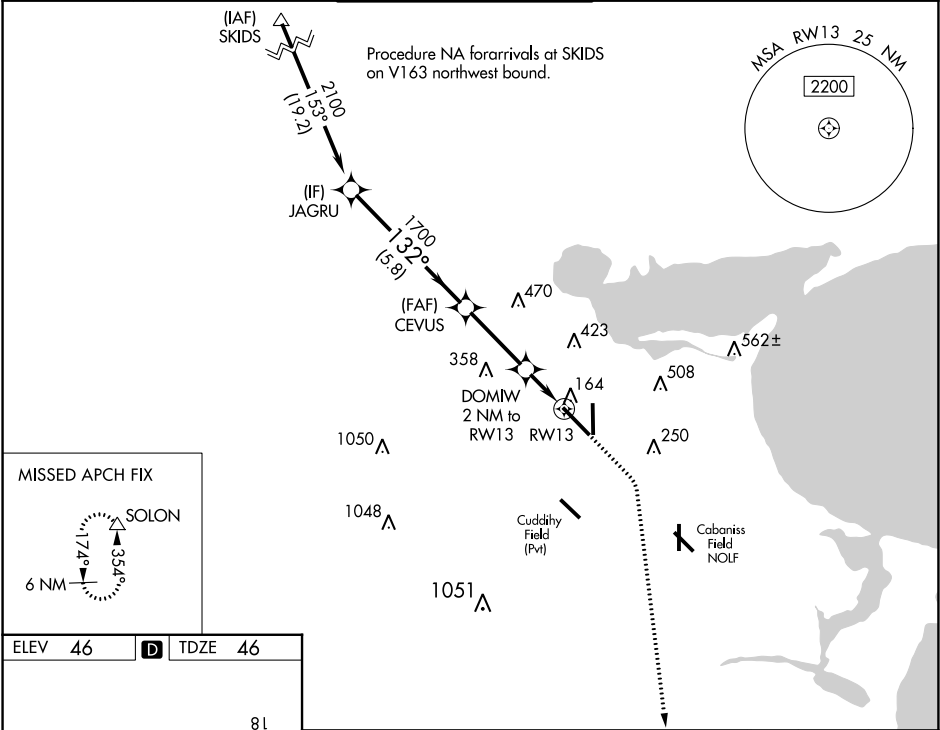

	JAGRU	CEVUS	DOMIW 2 NM to RW13	RW13	
	2100	1700	*720		
	GP 3.00° TCH 50				
	5.8 NM	3 NM	1 NM	1 NM	
CATEGORY	A	B	C	D	E
LPV DA**	246/24 200 (200-½)				
LNAV/VNAV DA	325/24 279 (300-½)				
LNAV MDA	420/24	374 (400-½)	420/35	374 (400-½)	
CIRCLING	500-1 454 (500-1)	580-1 534 (600-1)	820-2¼ 774 (800-2¼)	820-2½ 774 (800-2½)	820-2¾ 774 (800-2¾)