

WAAS	APP CRS	Rwy Idg	5500
CH 42822	247°	TDZE	665
W24A		Apt Elev	665

RNAV (GPS) RWY 24

SANDUSKY COUNTY RGNL (S24)

RNP APCH.


▽

NA


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Toledo Express altimeter setting. When local altimeter setting not received, use Toledo Express altimeter setting: increase LPV DA to 978 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1196 feet and all visibilities ¾ SM; increase all MDA 100 feet and LNAV visibility Cat C and D ¼ SM and Circling visibility Cat C and D ½ SM.

MISSED APPROACH:
Climb to 3000 direct ZUFIL and hold.

AWOS-3P 119.575	TOLEDO APP CON 126.1 307.0	UNICOM 123.05 (CTAF) 0
--------------------	-------------------------------	---------------------------

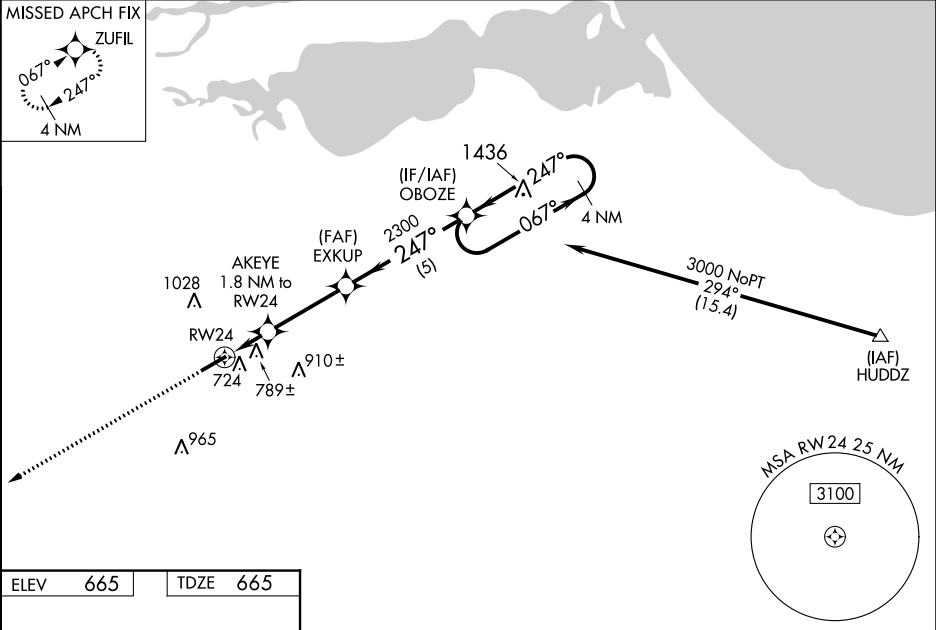

ELEV 665	TDZE 665
----------	----------

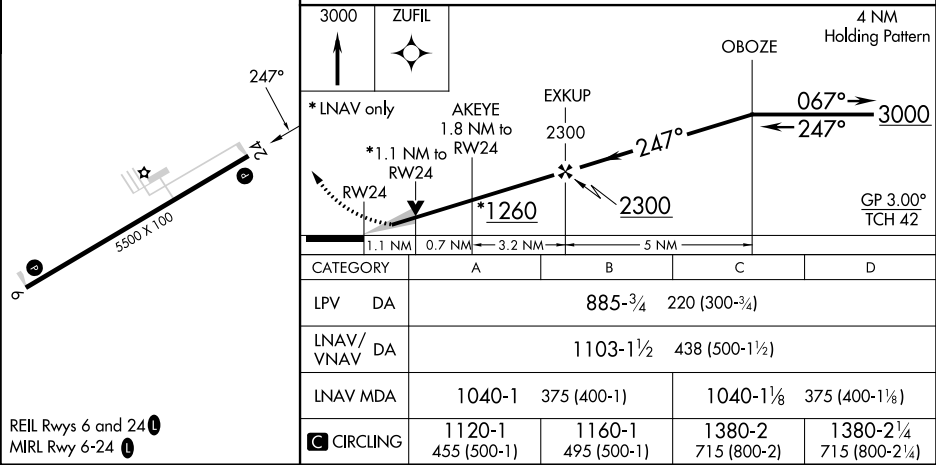

REIL Rws 6 and 24 0
MIRL Rwy 6-24 0