

WAAS CH 82538 W35A	APP CRS 354°	Rwy Idg TDZE 1223 Apt Elev 1232
--	------------------------	---

RNAV (GPS) RWY 35

GEORGE L SCOTT MUNI (3Y2)

RNP APCH.


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Decorah altimeter setting. Obtain local altimeter setting on CTAF; when not received, use Decorah altimeter setting and increase LPV DA to 1524 all Cats and all visibilities ½ mile, LNAV/VNAV DA to 1773 all Cats and all visibilities ½ mile; increase all MDA 60 feet and LNAV Cat C visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct CADJU and hold.

MINNEAPOLIS CENTER 118.85	UNICOM 122.8 (CTAF) 0
-------------------------------------	---------------------------------

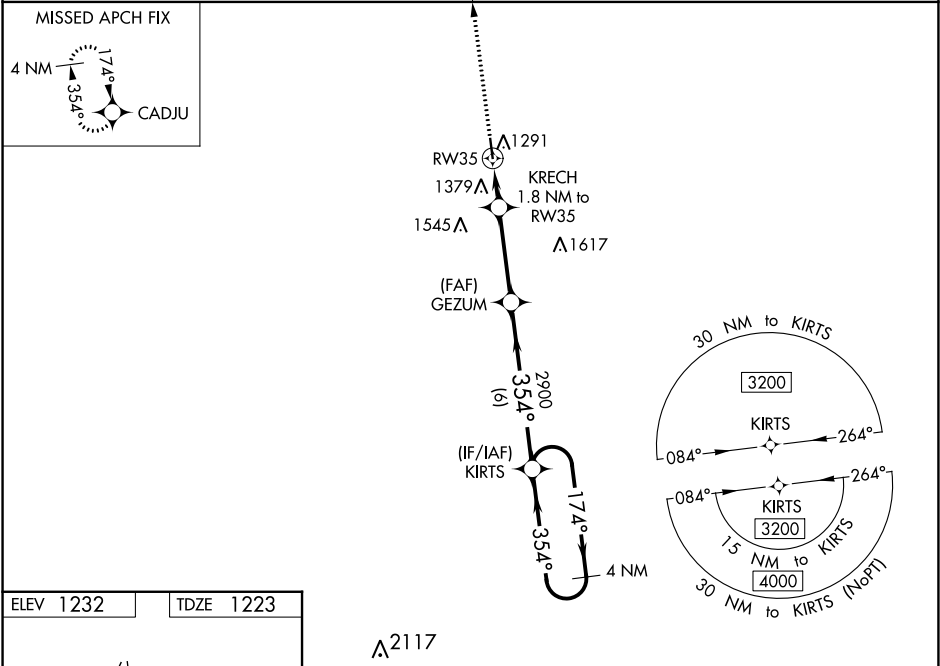

ELEV 1232

TDZE 1223

▲ 2117

3000 CADJU

* LNAV only

RW35

* 1.3 NM to RW35

KRECH 1.8 NM to RW35

GEZUM 2900

KIRTS 3200

4 NM Holding Pattern

1800*

1.3 NM

0.5 NM

3.4 NM

6 NM

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	1473-1	250 (300-1)		NA
LNAV/VNAV DA	1722-1 7/8	499 (500-1 7/8)		NA
LNAV MDA	1640-1	417 (500-1)	1640-1 1/8 417 (500-1 1/8)	NA
CIRCLING	1740-1	508 (600-1)	1860-1 3/4 628 (700-1 3/4)	NA