

PVsyst - Simulation report

Grid-Connected System

Project: 5kW Hall 1o IIT kanpur Project

Variant: New simulation variant

No 3D scene defined, no shadings

System power: 5.04 kWp

Hall 10 IIT kanpur - India



Project: 5kW Hall 1o IIT kanpur Project

Variant: New simulation variant

PVsyst V7.4.0

VC0, Simulation date:
15/08/23 16:49
with v7.4.0

Project summary

Geographical Site

Hall 10 IIT kanpur

India

Situation

Latitude 26.51 °N

Longitude 80.23 °E

Altitude 125 m

Time zone UTC+5.5

Project settings

Albedo 0.20

Meteo data

Hall 10 IIT kanpur

Meteonorm 8.1 (1996-2015), Sat=100% - Synthetic

System summary

Grid-Connected System

No 3D scene defined, no shadings

PV Field Orientation

Fixed plane

Tilt/Azimuth 26 / 0 °

Near Shadings

No Shadings

User's needs

Unlimited load (grid)

System information

PV Array

Nb. of modules

16 units

Pnom total

5.04 kWp

Inverters

Nb. of units

1 unit

Pnom total

4950 W

Pnom ratio

1.018

Results summary

Produced Energy 6982.58 kWh/year

Specific production

1385 kWh/kWp/year

Perf. Ratio PR

81.89 %

Table of contents

Project and results summary	2
General parameters, PV Array Characteristics, System losses	3
Main results	4
Loss diagram	5
Predef. graphs	6
Single-line diagram	7



PVsyst V7.4.0

VC0, Simulation date:
15/08/23 16:49
with v7.4.0

General parameters

Grid-Connected System

No 3D scene defined, no shadings

PV Field Orientation

Orientation

Fixed plane

Tilt/Azimuth 26 / 0 °

Sheds configuration

No 3D scene defined

Models used

Transposition Perez
Diffuse Perez, Meteonorm
Circumsolar separate

Horizon

Free Horizon

Near Shadings

No Shadings

User's needs

Unlimited load (grid)

PV Array Characteristics

PV module

Manufacturer

Model

(Custom parameters definition)

Unit Nom. Power

Number of PV modules

Nominal (STC)

Modules

At operating cond. (50°C)

Pmpp

U mpp

I mpp

Total PV power

Nominal (STC)

Total

Module area

Cell area

Generic

PM318B01_315

315 Wp

16 units

5.04 kWp

2 Strings x 8 In series

4567 Wp

388 V

12 A

5 kWp

16 modules

26.1 m²23.4 m²

Inverter

Manufacturer

Model

(Original PVsyst database)

Unit Nom. Power

Number of inverters

Total power

Operating voltage

Max. power (=>40°C)

Pnom ratio (DC:AC)

No power sharing between MPPTs

Generic

SUN2000-4.95KTL-JPL1

4.95 kWac

2 * MPPT 50% 1 unit

5.0 kWac

90-560 V

5.21 kWac

1.02

Total inverter power

Total power

Number of inverters

Pnom ratio

5 kWac

1 unit

1.02

Array losses

Thermal Loss factor

Module temperature according to irradiance

Uc (const) 20.0 W/m²KUv (wind) 0.0 W/m²K/m/s

DC wiring losses

Global array res.

555 mΩ

Loss Fraction

1.5 % at STC

Module Quality Loss

Loss Fraction

-0.8 %

Module mismatch losses

Loss Fraction 2.0 % at MPP

IAM loss factor

ASHRAE Param.: IAM = 1 - bo (1/cosi -1)

bo Param.

0.05



PVsyst V7.4.0

VC0, Simulation date:
15/08/23 16:49
with v7.4.0

Main results

System Production

Produced Energy 6982.58 kWh/year


Specific production

1385 kWh/kWp/year


Perf. Ratio PR

81.89 %

Normalized productions (per installed kWp)

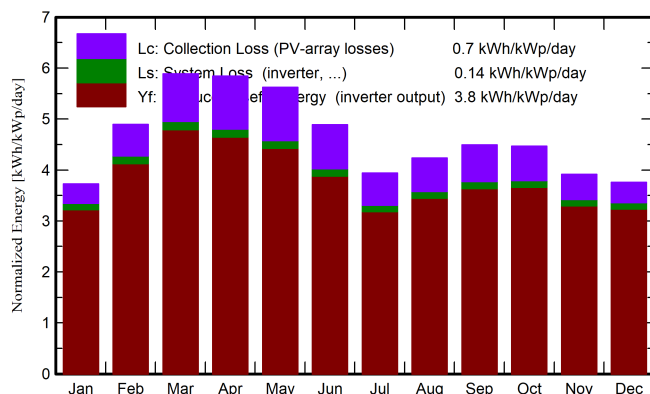

Performance Ratio PR

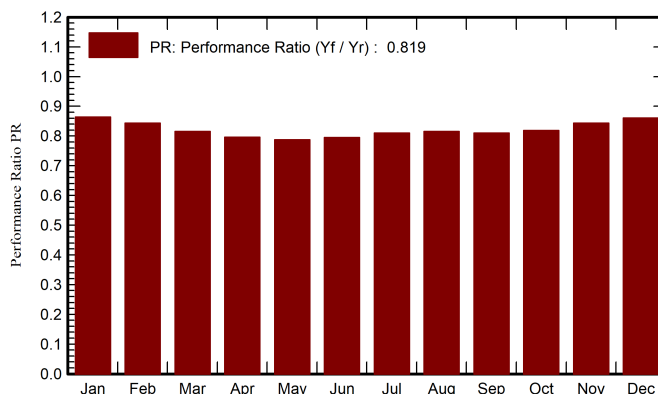

Balances and main results

	GlobHor	DiffHor	T_Amb	GlobInc	GlobEff	EArray	E_Grid	PR
	kWh/m ²	kWh/m ²	°C	kWh/m ²	kWh/m ²	kWh	kWh	ratio
January	92.2	51.7	14.11	115.6	112.9	523.2	503.3	0.864
February	113.7	58.2	18.43	137.1	134.1	604.0	582.9	0.844
March	163.6	75.0	24.23	182.4	178.3	775.1	749.3	0.815
April	173.4	90.8	29.93	175.2	170.9	727.1	703.0	0.796
May	184.7	102.2	32.74	174.3	169.4	716.1	691.9	0.788
June	159.7	98.0	32.23	146.6	142.2	609.1	587.6	0.795
July	131.6	90.9	29.99	122.1	118.2	518.0	498.2	0.810
August	136.1	93.0	29.45	131.3	127.4	559.8	539.2	0.815
September	129.0	75.7	28.47	134.8	131.2	571.0	550.3	0.810
October	121.8	72.2	26.25	138.6	135.5	593.5	572.2	0.819
November	95.7	58.5	20.54	117.4	114.6	517.9	498.9	0.843
December	89.6	51.3	15.71	116.5	113.7	525.4	505.7	0.861
Year	1591.1	917.5	25.20	1691.9	1648.4	7240.2	6982.6	0.819

Legends

GlobHor Global horizontal irradiation

DiffHor Horizontal diffuse irradiation

T_Amb Ambient Temperature

GlobInc Global incident in coll. plane

GlobEff Effective Global, corr. for IAM and shadings

EArray Effective energy at the output of the array

E_Grid Energy injected into grid


PR Performance Ratio



PVsyst V7.4.0

VC0, Simulation date:
15/08/23 16:49
with v7.4.0

Loss diagram

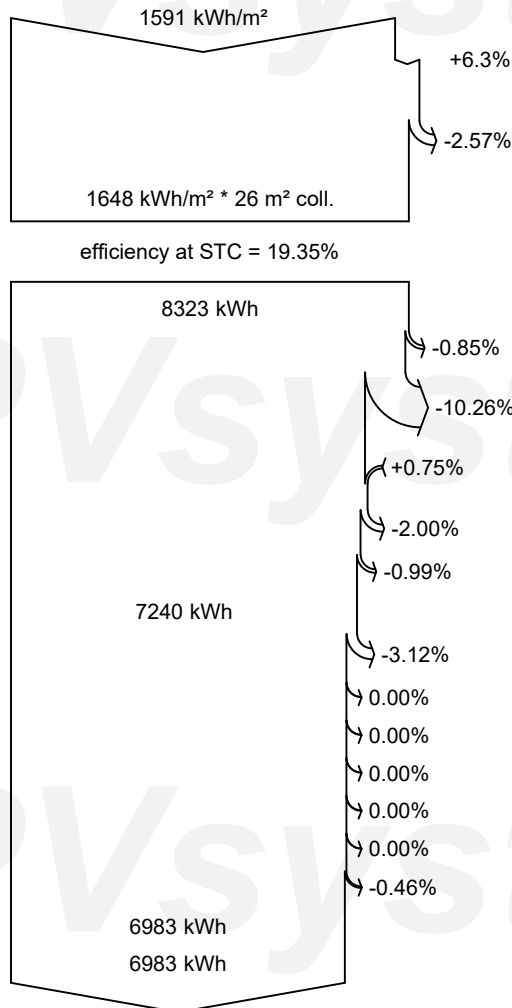

Global horizontal irradiation

Global incident in coll. plane

IAM factor on global

Effective irradiation on collectors

PV conversion

Array nominal energy (at STC effic.)

PV loss due to irradiance level

PV loss due to temperature

Module quality loss

Module array mismatch loss

Ohmic wiring loss

Array virtual energy at MPP

Inverter Loss during operation (efficiency)

Inverter Loss over nominal inv. power

Inverter Loss due to max. input current

Inverter Loss over nominal inv. voltage

Inverter Loss due to power threshold

Inverter Loss due to voltage threshold

Night consumption

Available Energy at Inverter Output

Energy injected into grid




PVsyst V7.4.0


VC0, Simulation date:
15/08/23 16:49
with v7.4.0

Predef. graphs

Daily Input/Output diagram

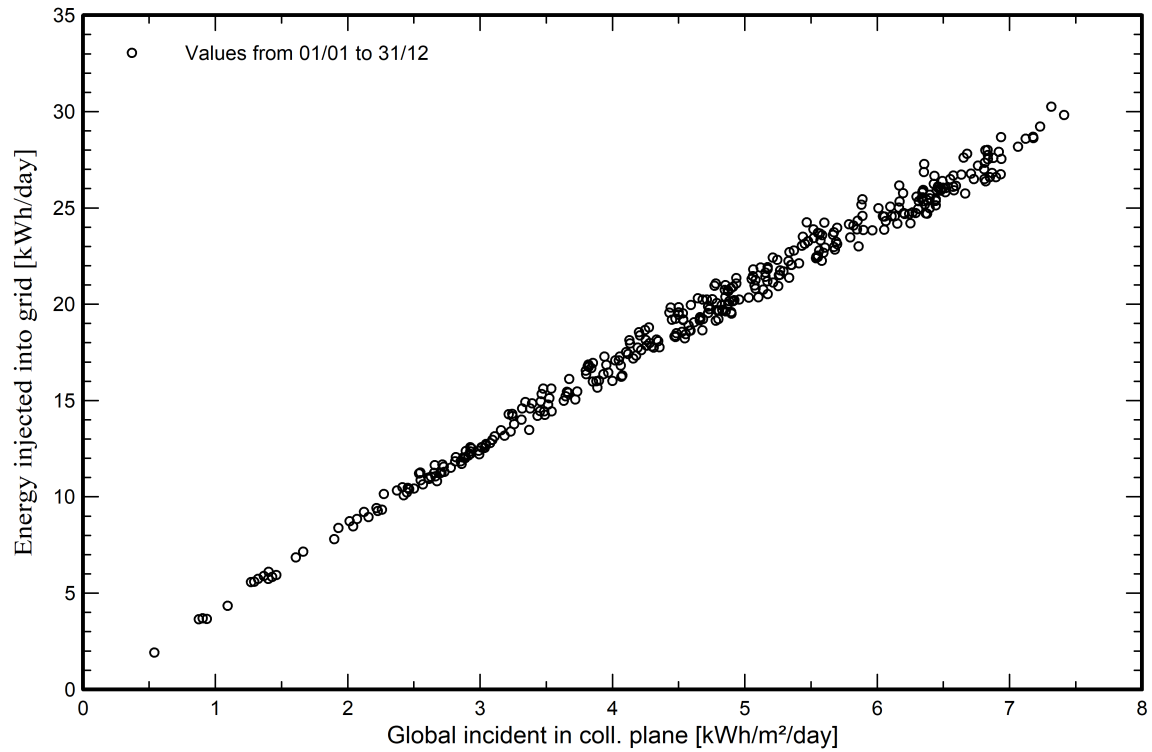

System Output Power Distribution

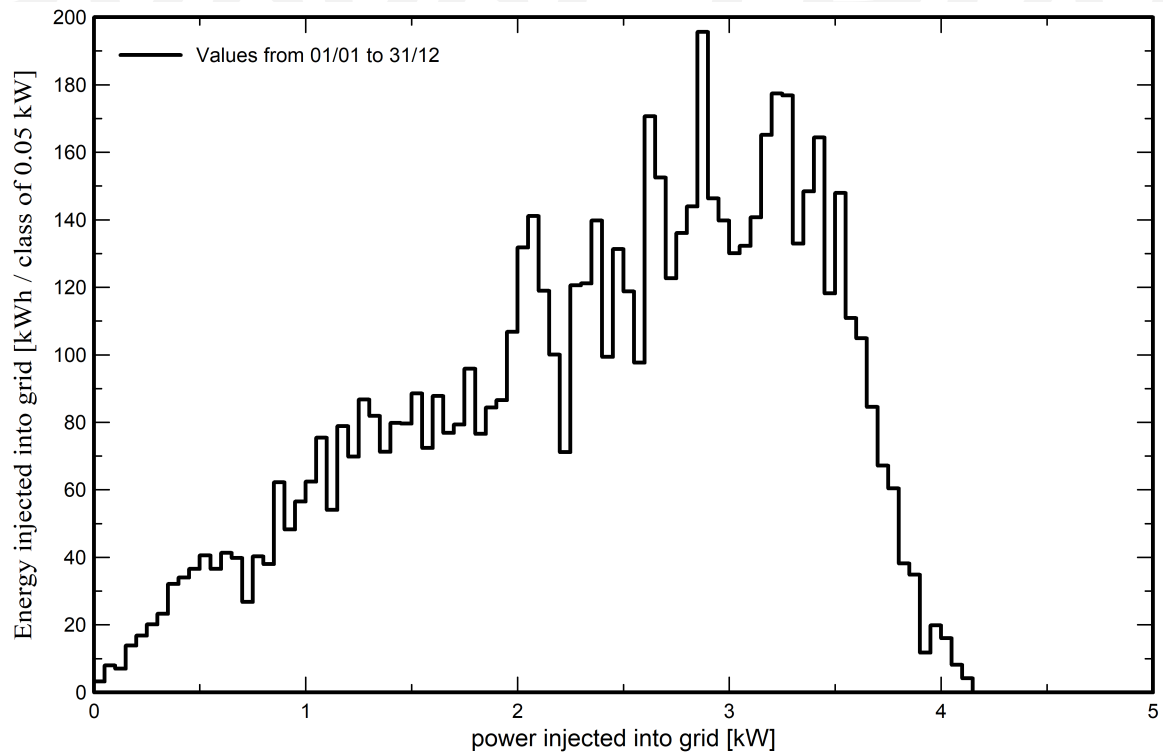




PVsyst V7.4.0

VC0, Simulation date:
15/08/23 16:49
with v7.4.0

Single-line diagram

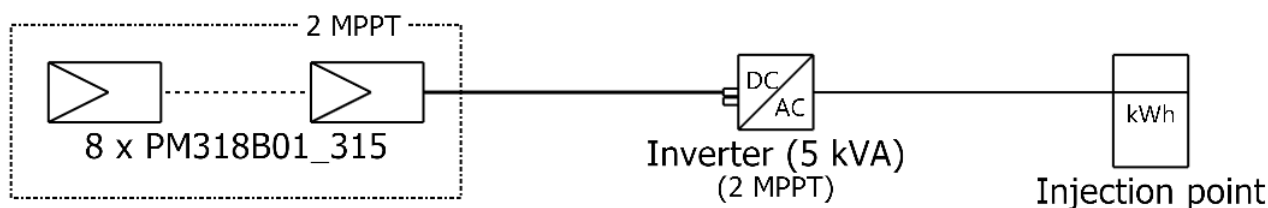

PV module	PM318B01_315
Inverter	SUN2000-4.95KTL-JPL1
String	8 x PM318B01_315

5kW Hall 1o IIT kanpur Project

VC0 : New simulation variant

15/08/23