

03.101 CCAA Main Cabin Fan Activation (03. HSS Procedure)

OBJECTIVE:

To activate the main cabin fans to provide air circulation for the ECLSS systems.

1. ACTIVATE MAIN CABIN FANS

- 1.1 On HSS CDRA display, touch Main Cabin Fan 1 icon to activate fan (see Figure 1).

Verify fan has audibly turned on.

- 1.2 On HSS CDRA display, touch Main cabin Fan 2 icon to activate fan (see Figure 1).

Verify fan has audibly turned on.

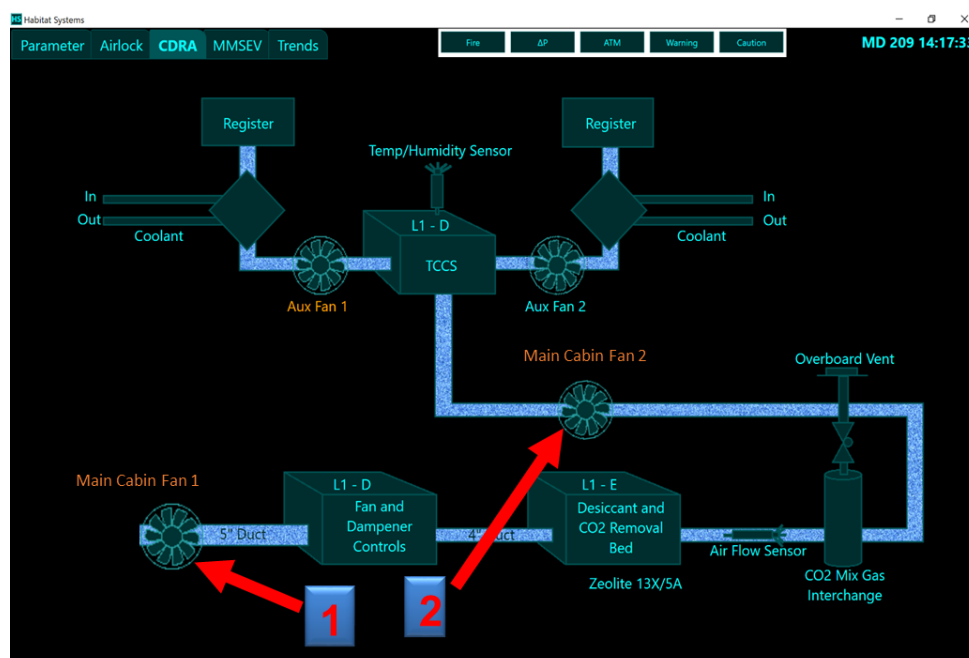


Figure 1. Main Cabin Fan Power