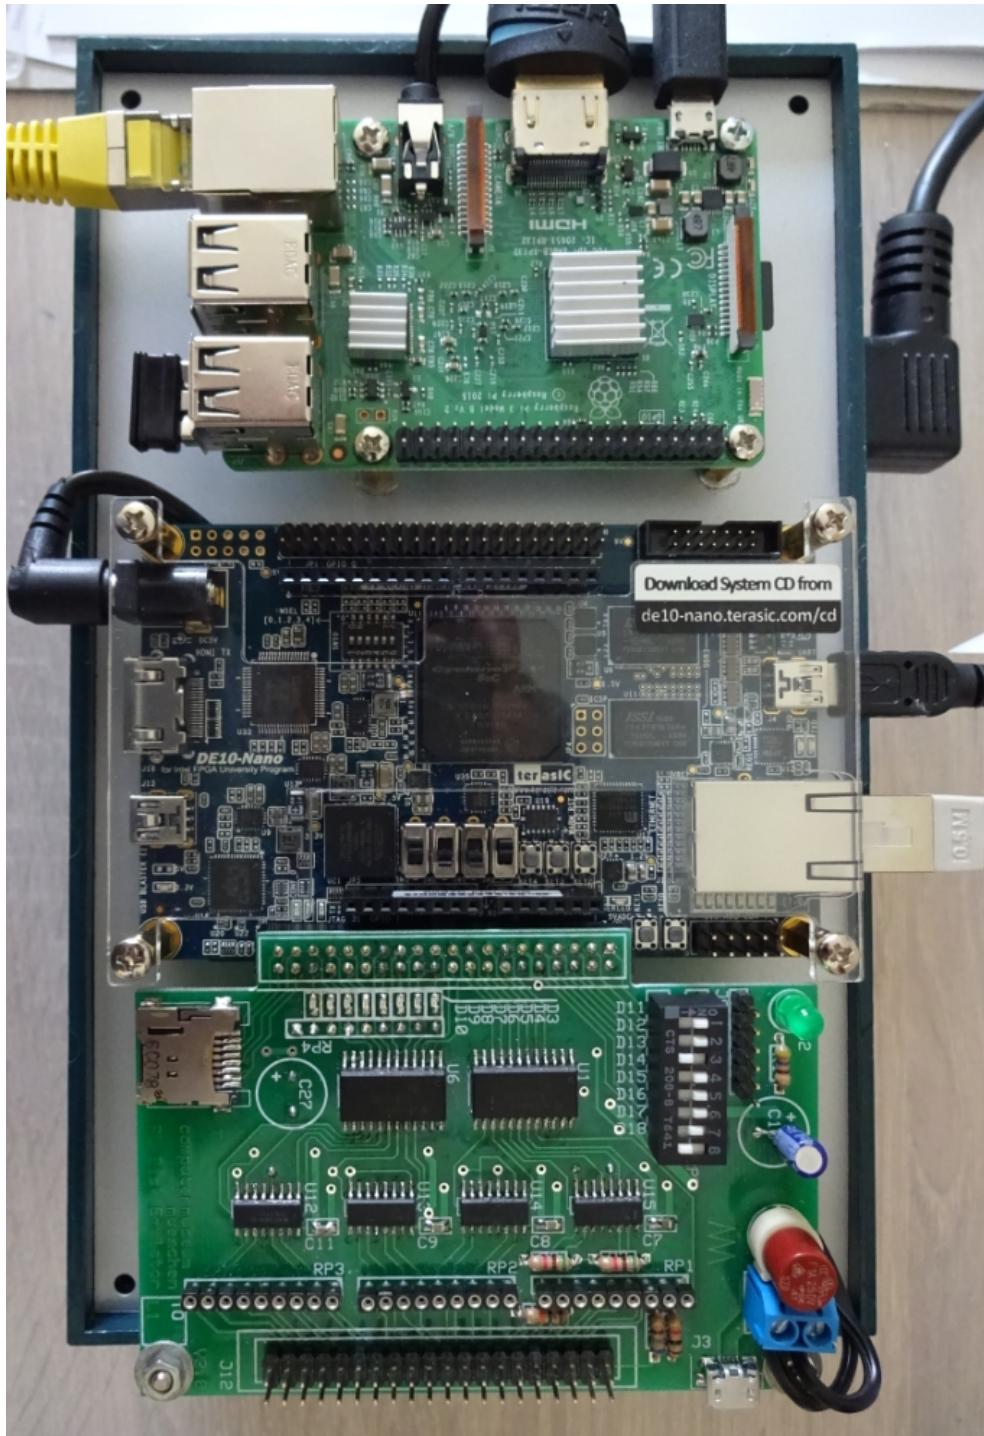# Emulated Data Center from 1980

These 3 components are needed to emulate a data center from the years around 1980:

Raspberry Pi 3-B , DE10-Nano board and RL-emulator interface board

Furthermore, there is still plenty of room for other applications, such as an MFM disk emulator. The second PIO and the Arduino connector are still unused. **I would be glad about a collaboration.**