## 6.003: Signals and Systems

**Fourier Series** 

April 1, 2010

### Mid-term Examination #2

Wednesday, April 7, 7:30-9:30pm.

No recitations on the day of the exam.

Coverage: Lectures 1–15

Recitations 1–15 Homeworks 1–8

Homework 8 will not collected or graded. Solutions will be posted.


Closed book: 2 pages of notes  $(8\frac{1}{2} \times 11 \text{ inches; front and back}).$ 

Designed as 1-hour exam; two hours to complete.

Review sessions during open office hours.

### Last Time: Describing Signals by Frequency Content

Harmonic content is natural way to describe some kinds of signals. Ex: musical instruments (http://theremin.music.uiowa.edu/MIS)



### Last Time: Fourier Series

Determining harmonic components of a periodic signal.

$$a_k = rac{1}{T} \int_T x(t) e^{-jrac{2\pi}{T}kt} dt$$
 ("analysis" equation)

$$x(t){=}\;x(t+T)=\sum_{k=-\infty}^{\infty}a_ke^{j\frac{2\pi}{T}kt} \qquad \qquad \text{("synthesis" equation)}$$

We can think of Fourier series as an orthogonal decomposition.

### **Orthogonal Decompositions**

**Vector representation of 3-space:** let  $\bar{r}$  represent a vector with components  $\{x, y, \text{ and } z\}$  in the  $\{\hat{x}, \hat{y}, \text{ and } \hat{z}\}$  directions, respectively.

$$x=\bar{r}\cdot\hat{x}$$
 
$$y=\bar{r}\cdot\hat{y}$$
 ("analysis" equations) 
$$z=\bar{r}\cdot\hat{z}$$

$$\bar{r} = x\hat{x} + y\hat{y} + z\hat{z}$$
 ("synthesis" equation)

**Fourier series:** let x(t) represent a signal with harmonic components  $\{a_0, a_1, \ldots, a_k\}$  for harmonics  $\{e^{j0t}, e^{j\frac{2\pi}{T}t}, \ldots, e^{j\frac{2\pi}{T}kt}\}$  respectively.

$$a_k = \frac{1}{T} \int_T x(t) e^{-j\frac{2\pi}{T}kt} dt$$
 ("analysis" equation)

$$x(t)=x(t+T)=\sum_{k=-\infty}^{\infty}a_ke^{jrac{2\pi}{T}kt}$$
 ("synthesis" equation)

### **Orthogonal Decompositions**

Integrating over a period **sifts** out the  $k^{\rm th}$  component of the series. Sifting as a dot product:

$$x = \bar{r} \cdot \hat{x} \equiv |\bar{r}||\hat{x}|\cos\theta$$

Sifting as an inner product:

$$a_k = e^{j\frac{2\pi}{T}kt} \cdot x(t) \equiv \frac{1}{T} \int_T x(t)e^{-j\frac{2\pi}{T}kt}dt$$


where


$$a(t) \cdot b(t) = \frac{1}{T} \int_T a^*(t)b(t)dt.$$


The complex conjugate (\*) makes the inner product of the  $k^{\rm th}$  and  $m^{\rm th}$  components equal to 1 iff k=m:


$$\frac{1}{T}\int_T \left(e^{j\frac{2\pi}{T}kt}\right)^* \left(e^{j\frac{2\pi}{T}mt}\right) dt = \frac{1}{T}\int_T e^{-j\frac{2\pi}{T}kt}e^{j\frac{2\pi}{T}mt} dt = \begin{cases} 1 & \text{if } k=m\\ 0 & \text{otherwise} \end{cases}$$


# Check Yourself How many of the following pairs of functions are orthogonal ( $\bot$ ) in T=3? 1. $\cos 2\pi t \perp \sin 2\pi t$ ? 2. $\cos 2\pi t \perp \cos 4\pi t$ ? 3. $\cos 2\pi t \perp \sin \pi t$ ? 4. $\cos 2\pi t \perp e^{j2\pi t}$ ?

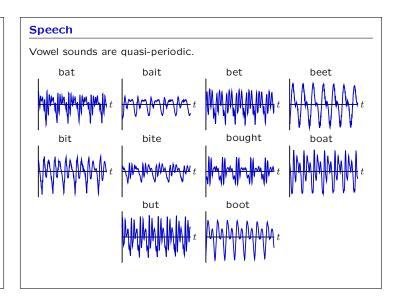

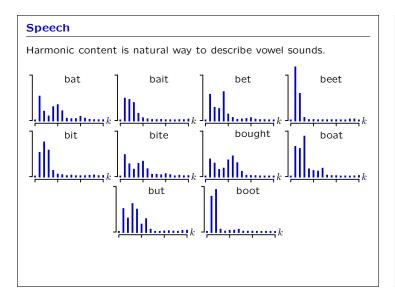

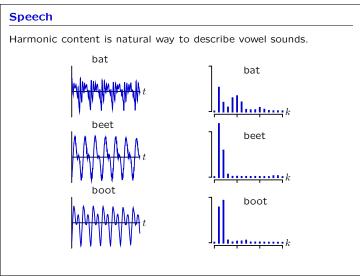


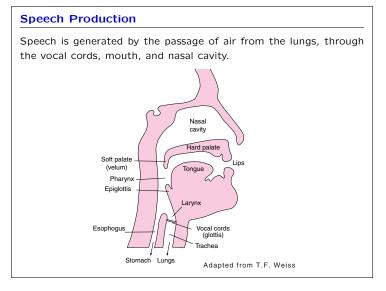

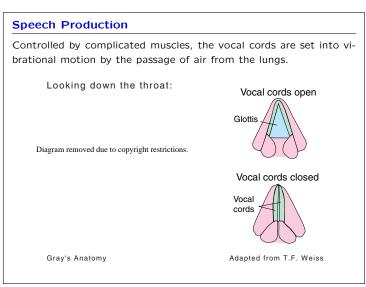

### **Speech Production**

Vibrations of the vocal cords are "filtered" by the mouth and nasal cavities to generate speech.




### **Filtering**

Notion of a filter.

LTI systems


- cannot create new frequencies.
- can only scale magnitudes and shift phases of existing components.

Example: Low-Pass Filtering with an RC circuit




### Lowpass Filter

Calculate the frequency response of an RC circuit.

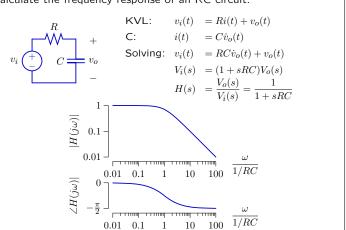


### **Lowpass Filtering**

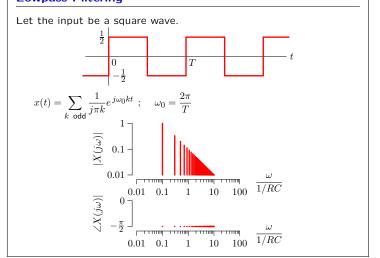


### **Lowpass Filtering**


Low frequency square wave:  $\omega_0 << 1/RC$ .

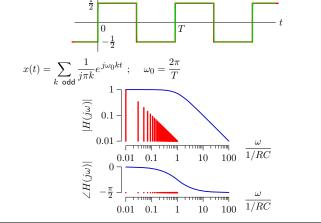



### **Lowpass Filtering**


Higher frequency square wave:  $\omega_0 < 1/RC$ .

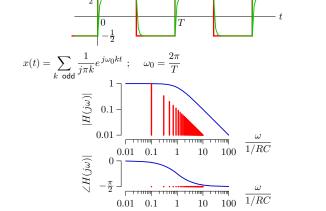


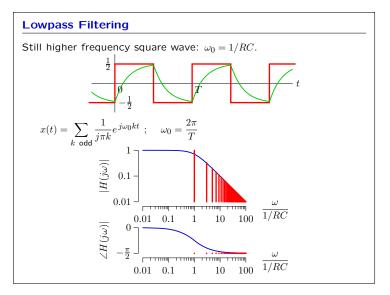


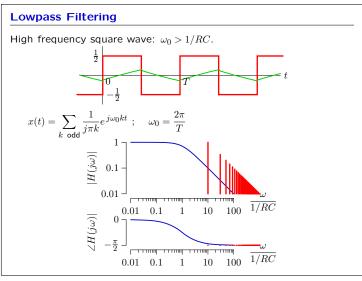

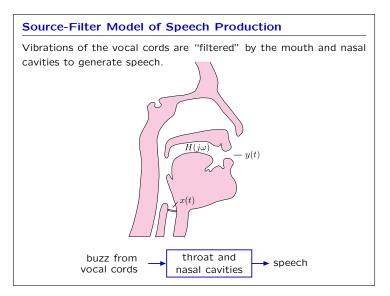

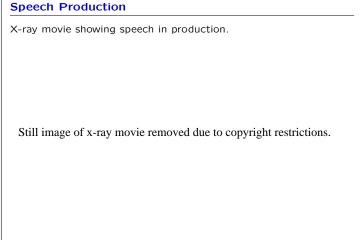

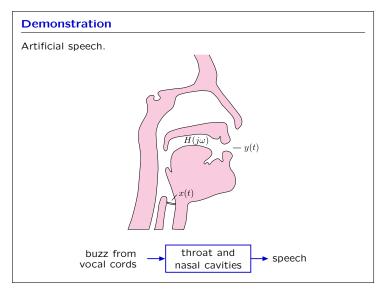

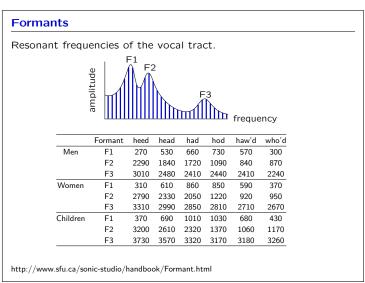

# **Speech Production** Same glottis signal + different formants $\rightarrow$ different vowels. glottis signal vocal tract filter $|H_{"ee"}(j\omega)|$ $\left|H_{``aa``}\left(j\omega\right)\right|$

We detect changes in the filter function to recognize vowels.

### **Singing**

We detect changes in the filter function to recognize vowels ... at least sometimes.

Demonstration.

"la" scale.

"lore" scale.

"loo" scale.

"ler" scale.


"lee" scale.

Low Frequency: "la" "lore" "loo" "ler" "lee".

High Frequency: "la" "lore" "loo" "ler" "lee".


http://www.phys.unsw.edu.au/jw/soprane.html

# **Speech Production**

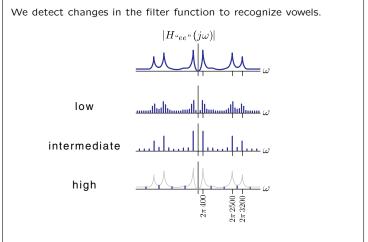

### **Speech Production**

We detect changes in the filter function to recognize vowels.

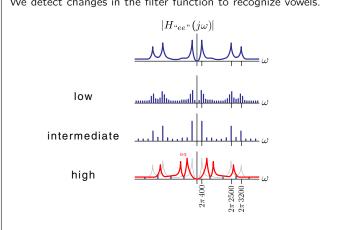

### Continuous-Time Fourier Series: Summary

Fourier series represent signals by their frequency content.

Representing a signal by its frequency content is useful for many signals, e.g., music.

Fourier series motivate a new representation of a system as a filter.

Representing a system as a filter is useful for many systems, e.g., speech synthesis.

MIT OpenCourseWare http://ocw.mit.edu

6.003 Signals and Systems Spring 2010

For information about citing these materials or our Terms of Use, visit: http://ocw.mit.edu/terms.