

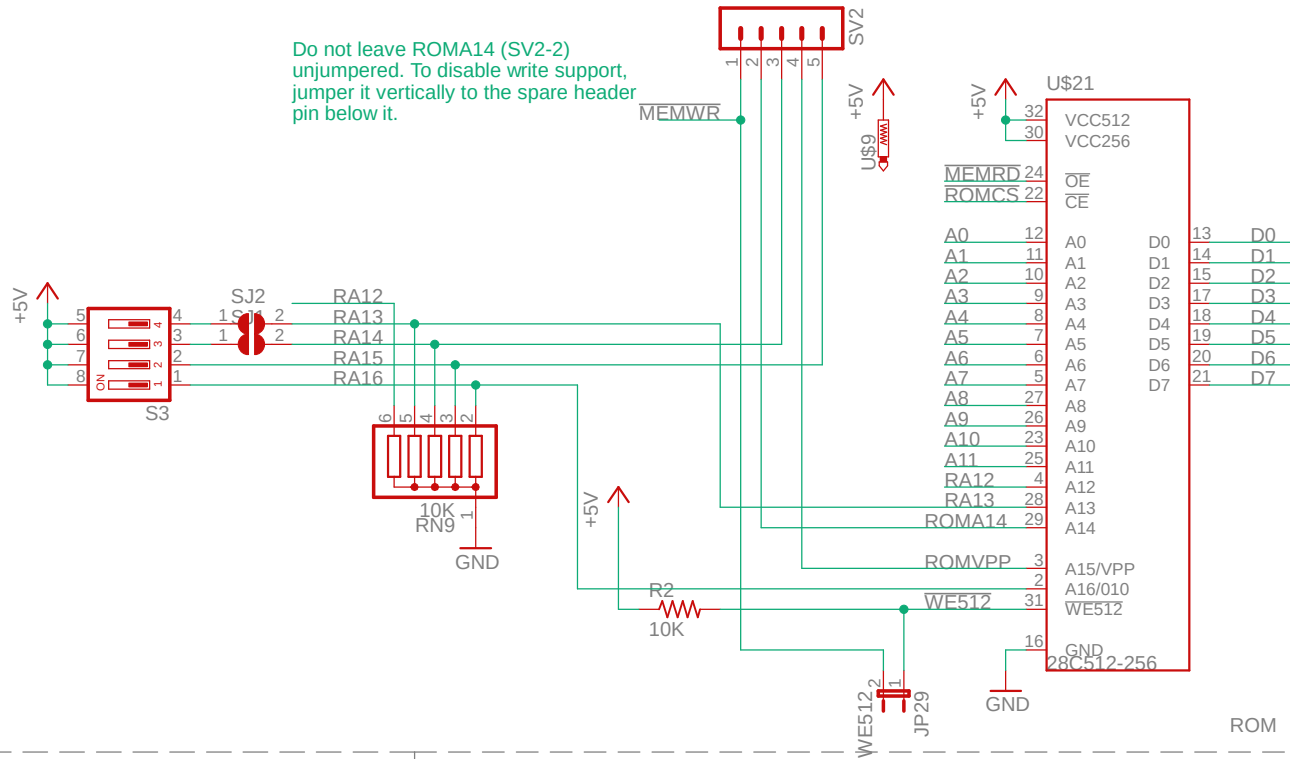


Do not leave ROMA14 (SV2-2) unjumped. To disable write support, jumper it vertically to the spare header pin below it.

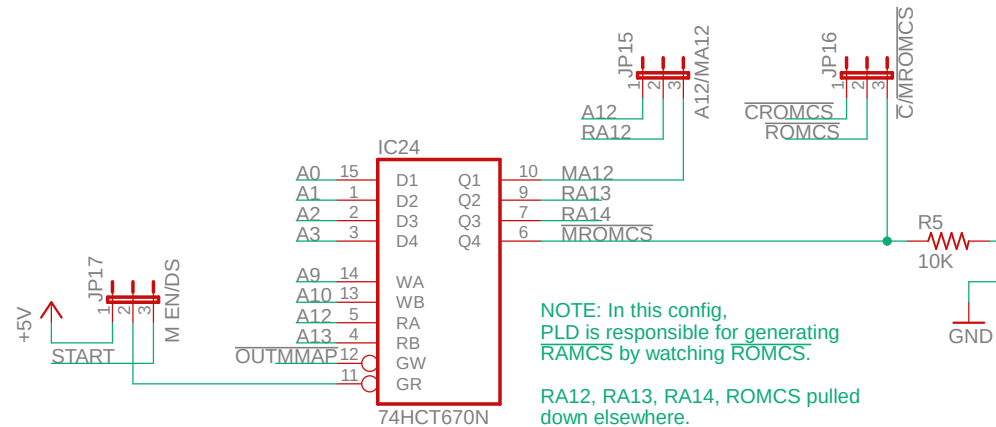

AS6C1008 should work in place of AS6C4008

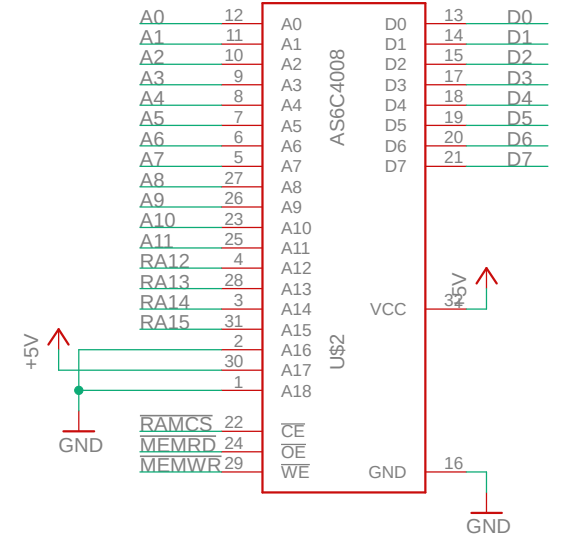

Set JP15, JP16, JP17 all to pins 2-3 to enable memory mapper, or to pins 1-2 to disable memory mapper.

Optional 32K ROM / 32K RAM memory mapper

