Switching Concepts

📕 CCNA2v7 Module 2 Switching Concepts
👨‍🏫 Pedro Durán

Switching in Networking

Ports Types:

- ⤵️ **Ingress**: entering the interface
- ⤴️ **Egress**: exiting the interface

Forwarding frames:

- ⤵️ **Ingress Interface**
- **Destination MAC address** ➡️ Egress
- **Using its MAC Address Table** ➡️ Ingress Source MAC Adress

Port Table

Destination Addresses	Port
EE	1
AA	2
BA	3
EA	4
AC	5
AB	6

The Switch Learn and Forward Method

1️⃣ Learn – Examines Source Address

- 🖌️ Adds the source MAC if not in table
- 🕐 Resets the time out setting back to 5 minutes if source is in the table

2️⃣ Forward – Examines Destination Address

- 🤔 Destination MAC in MAC address table? ➡️ forward out the specified port
- 🤔 Destination MAC is not in the table? ➡️ flooded out all interfaces except the one it was received.

Switch Forwarding Methods: Store-and-Forward

- **Error checking**: Check FCS for CRC errors. Bad frames discarded
- **Buffering**: Buffer frame while it checks FCS.

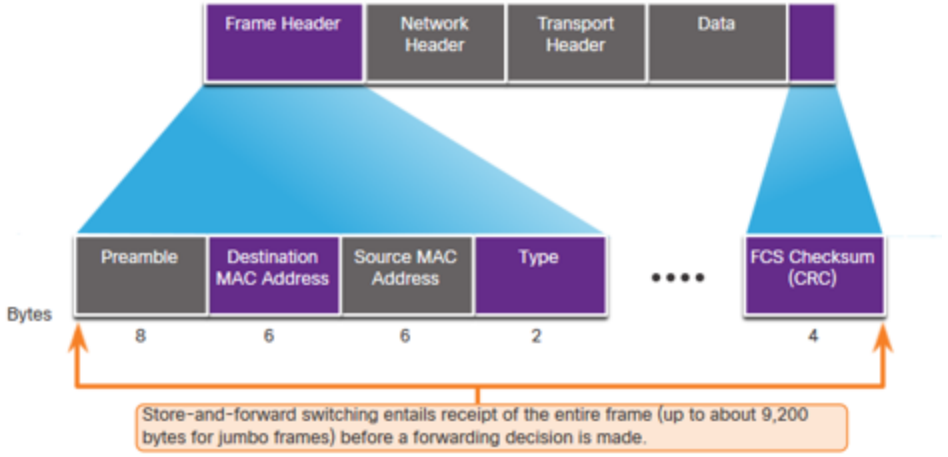

Switch Forwarding Methods: Cut-Through

- ✂️ **Cut-through**: Forwards frame after Destination MAC.
- **Fragment Free**: At least 64 bytes. Eliminates runts.
- ⚠️ **Does not check FCS** ➡️ **It can propagate errors**

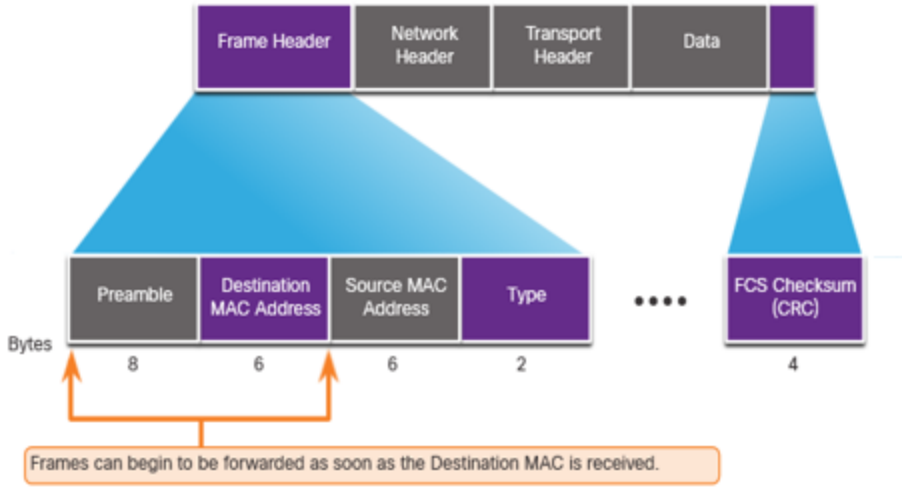

Broadcast domain

- Router: 🔴
- Switch: 🟢
- Hub: 🟢

Collision domain

- Router: 🔴
- Switch: 🔴
- Hub: 🟢

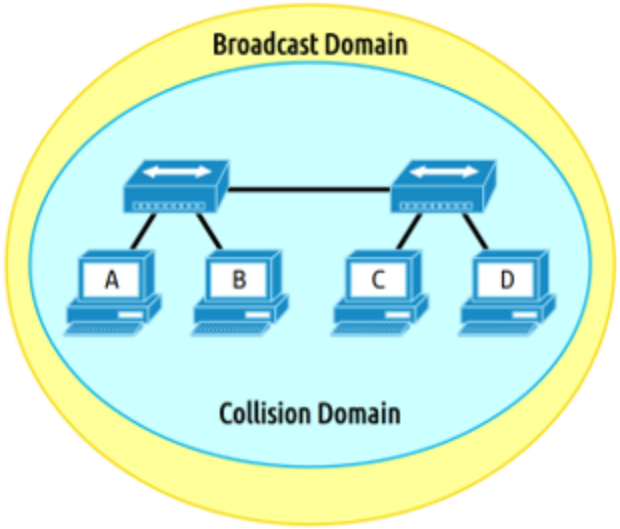

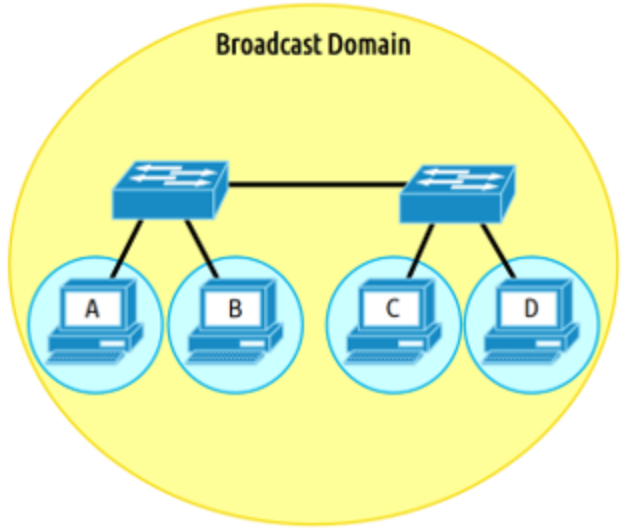

Alleviated Network Congestion

- MAC Address Table
- Full-duplex
- Fast Port Speeds
- Fast Internal Switching
- Large Frame Buffers
- High Port Density