

# EtherChannel






### **Link Aggregation**

**EtherChannel**: Allows you to combine multiple physical interfaces into one logical interface, which increases performance while maintaining redundancy.

- Provides fault-tolerance, load sharing, increase bandwith and redundancy.
- Also known as Port Aggregation (PAgP), Link Aggregation (LACP), channel bonding, or multilinking.

**Port channel**: Logical interface which operates at the speed of the combined physical interfaces.

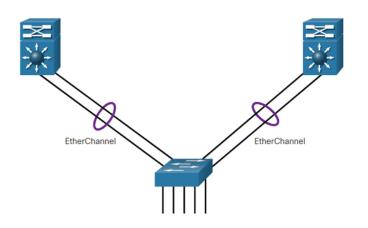

#### **Advantages**

- Configuration consistency throughout the links (same config).
- No need to upgrade the link to have more bandwith.
- Load balancing between links
- Provides redundancy (one physical link failing does not create a change in topology).

#### Restrictions

- Interface types cannot be mixed (FastEthernet <> GigabitEthernet).
- Up to 8 Ethernet ports (800 Mbps or 8 Gbps). Cisco 2960 up to 6 EtherChannels
- Individual EtherChannel group member port config must be consistent on both sides (L2 ports, if it's a trunk → same native VLAN)

#### **AutoNegation Protocols**

- Port Aggregation Protocol (PAgP):
  - Cisco propietary. PAgP packets sent every 30 seconds.
- Link Aggregation Control Protocol (LACP)
  - IEEE specification (802.3ad). Multivendor environments


#### **Configuration Guidelines both ends**

- Same EtherChannel support. Same speed and duplex.
- Same VLAN match (all interfaces to same VLAN or as a trunk) and Range of VLANs.

## PAgP - LACP Mode Settings

<b>S</b> 1	<b>S2</b>	Channel Establishment
On - On	On - On	Yes
On - On	Desirable/Auto - Active/Passive	No
Desirable - Active	Desirable - Active	Yes
Desirable - Active	Auto - Passive	Yes
Auto - Passive	Desirable - Active	Yes
Auto - Passive	Auto - Passive	No

### **LACP Configuration Example**



```
S1(config)# interface range f0/1-2
S1(config-if-range)# channel-group 1 mode active
S1(config-if-range)# port-channel interface Port-channel 1
S1(config-if-range)# interface port-channel 1
S1(config-if)# switchport mode trunk
S1(config-if)# switchport trunk allowed vlan 1,2,20
S1(config-if)# end
S1# show interfaces port-channel
S1# show etherchannel summary
S1# show interfaces etherchannel
```