



***Preliminary AIC8800D40 Low-Energy
Wi-Fi6/BTDM5.4 SoC
Data Sheet***

***Revision: 1.0
Apr 2023***



1. General Description

AIC8800D40 is a highly integrated chip with dual band Wi-Fi6, BLE5.4 for wireless application.

1.1 Wi-Fi Features

- CMOS single-chip fully-integrated RF, Modem and MAC
- Support 2.4GHz/5GHz Wi-Fi6
- Data rates up to 286.8Mbps with 20/40MHz bandwidth
- Support 5MHz/10MHz mode
- RX sensitivity -97dBm in 11b 1M mode
- Tx power up to 23dBm in 11b mode, 18dBm in HT/VHT/HE MCS7 mode
- Support STA, AP, Wi-Fi Direct modes concurrently
- Support STBC, beamforming
- Support Wi-Fi6 TWT
- Support Two NAV, Buffer Report, Spatial reuse, Multi-BSSID, intra-PPDU power save
- Support LDPC
- Support MU-MIMO, OFDMA
- Support DCM, Mid-amble, UORA
- Support WEP/WPA/WPA2/WPA3-SAE Personal, MFP

1.2 BTDM 5.4 Features

- Supports all the mandatory and optional features of Bluetooth 2.1+EDR/3.0/4.x/5.3/5.4
- Supports advanced master and slave topologies

1.3 Other Features

- Supports SDIO3.0/USB2.0/PCIE(D80P)/HCI_UART/PCM interface
- Integrated low power timer and watchdog
- 512 bits eFuse

1.4 Packaging Information

- Compact profile package: 5mm×5mm×0.75mm QFN48



1.5 Applications

- IoT device
- Wireless device

Confidential 20230403



2. Platform Description

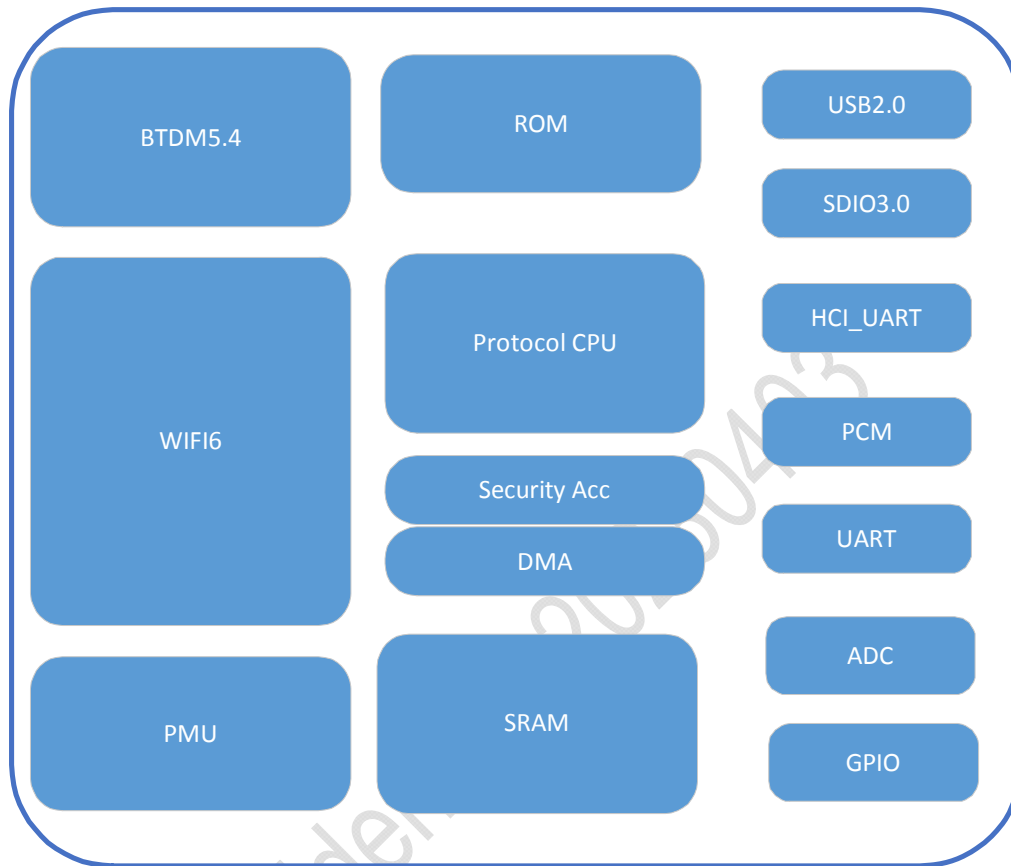


Figure2-1 AIC8800D40 Block Diagram



3. PINS Description

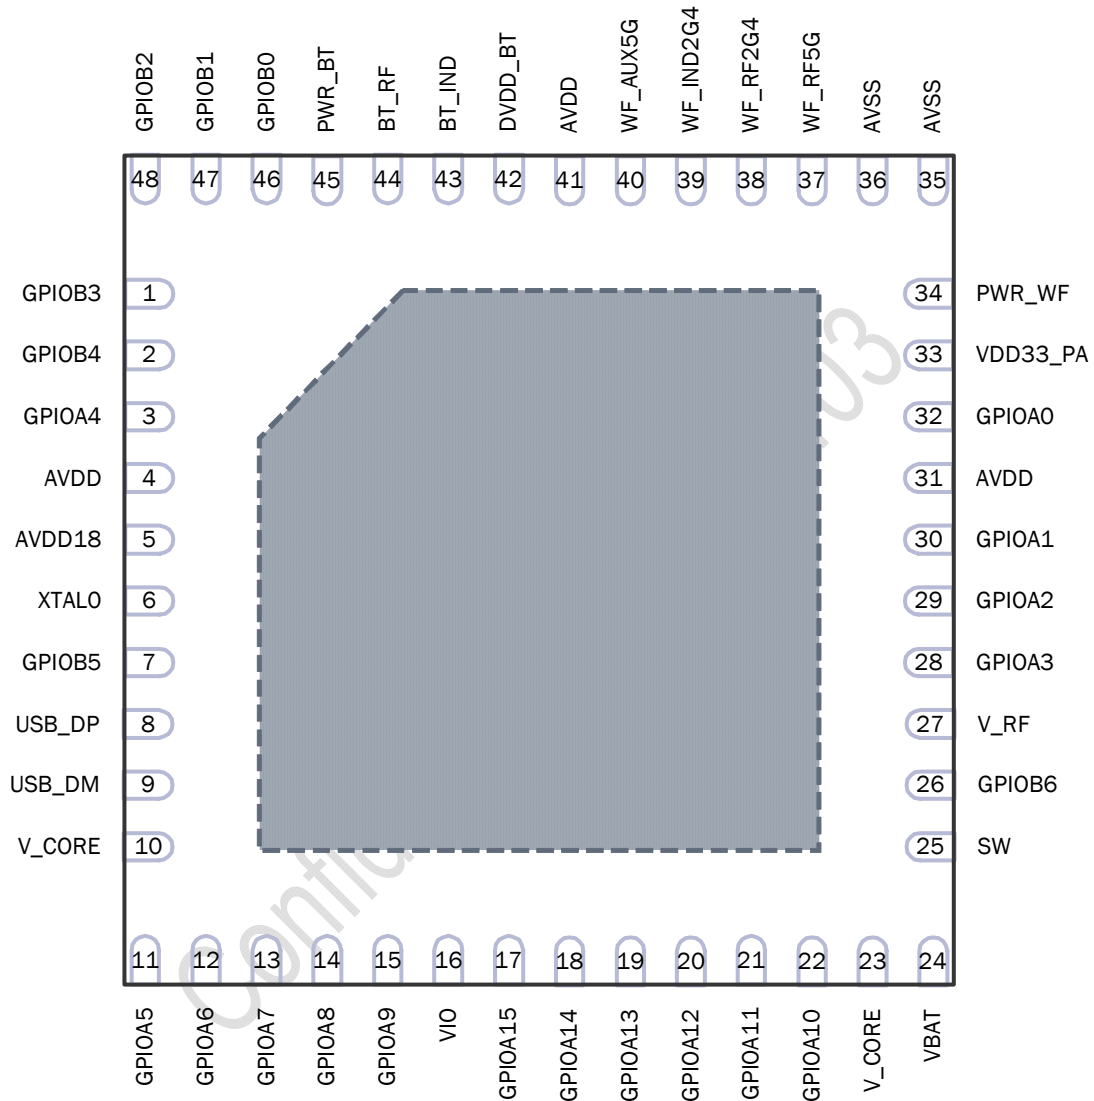


Figure 3-1 AIC8800D40 Pin Map


Table 3-1 AIC8800D40_48pin Pins Description

TERMINAL			DESCRIPTION
PIN NAME	QFN NO.	I/O	
RF			
WF_RF2G4	38	I/O	WiFi 2.4G RF
WF_IND2G4	39		WiFi 2.4G RF Ground, connect a 1.2nH inductor to ground
WF_RF5G	37	I/O	WiFi 5G RF
WF_AUX5G	40	I	WiFi 5G RX Aux
BT_RF	44	I/O	BT RF
BT_IND	43		BT RF Ground, connect a 1.2nH inductor to ground
NC	35		AVSS
NC	36		AVSS
PMU			
AVDD	4		Need 1uF decoupling capacitor
AVDD	31		Need 1uF decoupling capacitor
AVDD	41		Need 1uF decoupling capacitor
AVDD18	5		Power output 1.8v, internal Efuse supply voltage, connect a 1uF decoupling capacitor
V_CORE	10		Need 1uF decoupling capacitor, connect to pin23
V_CORE	23		Digital Supply Voltage
VIO	16	I	IO Power Supply, Support 1.8v/3.3v
VBAT	24	I	System power supply
SW	25	O	Power Output For V_RF
V_RF	27	I	RF Supply Voltage
VDD33_PA	33	I	PA Supply Voltage
PWR_WF	34	I	WiFi system enable
PWR_BT	45	I	BT system enable
DVDD_BT	42		Need 1uF decoupling capacitor
CLK			
XTAL0	6	I	40M Crystal In
GPIO			
GPIOA0	32	I/O	GPIO
GPIOA1	30	I/O	GPIO
GPIOA2	29	I/O	GPIO
GPIOA3	28	I/O	GPIO
GPIOA4	3	I/O	GPIO
GPIOA5	11	I/O	GPIO
GPIOA6	12	I/O	GPIO
GPIOA7	13	I/O	GPIO
GPIOA8	14	I/O	GPIO
GPIOA9	15	I/O	GPIO
GPIOA10	22	I/O	GPIO
GPIOA11	21	I/O	GPIO
GPIOA12	20	I/O	GPIO
GPIOA13	19	I/O	GPIO
GPIOA14	18	I/O	GPIO
GPIOA15	17	I/O	GPIO
GPIOB0	46	I/O	GPIO
GPIOB1	47	I/O	GPIO



TERMINAL			DESCRIPTION
PIN NAME	QFN NO.	I/O	
GPIOB2	48	I/O	GPIO
GPIOB3	1	I/O	GPIO
GPIOB4	2	I/O	GPIO
GPIOB5	7	I/O	GPIO
GPIOB6	26	I/O	GPIO
USB_DP	8	I/O	USB
USB_DM	9	I/O	USB

Confidential 20230403




4. Electrical Characteristics

Table 4-1 DC Electrical Specification (Recommended Operation Conditions):

SYMBOL	DESCRIPTION	MIN	TYP	MAX	UNIT
VBAT	Supply Voltage for System	3	3.3	3.6	V
V_RF	Supply Voltage from SW_RF	1.0	1.3	1.5	V
V_CORE	Supply Voltage from SW_RF	0.81	0.9	1.05	V
VDD33_PA	Supply Voltage for PA	3	3.3	3.6	V
AVDD18	Internal power supply for Efuse	1.69	1.8	2.49	V
DVDD_BT	Internal power supply for BT RF	1	1.15	1.5	V
AVDD	Connected with V_RF inside the chip	1.0	1.3	1.5	V
T _{amb}	Ambient Temperature	-20	27	+80	°C
T _{store}	Store Temperature	-55		+125	°C
V _{IL}	CMOS Low Level Input Voltage	0		0.3*VIO	V
V _{IH}	CMOS High Level Input Voltage	0.7*VIO		VIO	V
V _{TH}	CMOS Threshold Voltage		0.5*VIO		V



5.1 General design

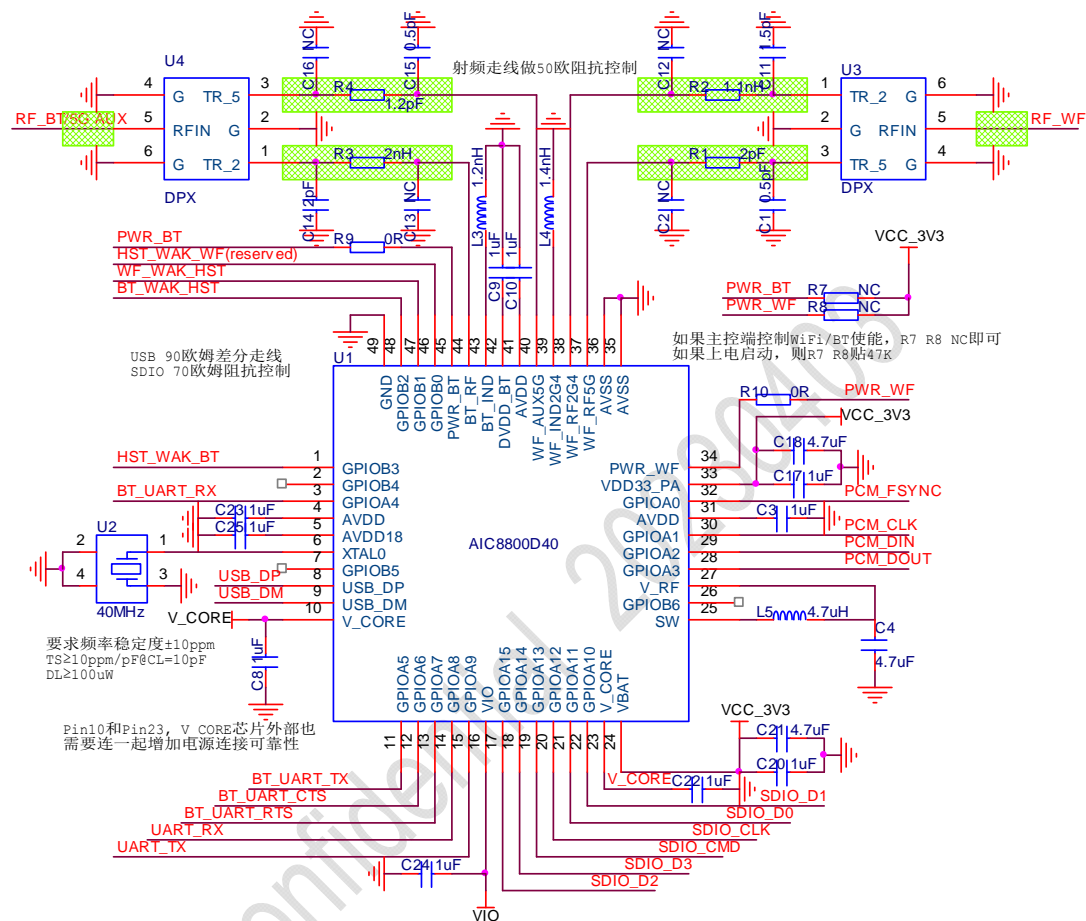



USB 90欧姆差分走线
SDIO 70欧姆阻抗控制

如果主控端控制WiFi/BT使能，R7 R8 即可
如果上电启动，则R7 R8 贴47K


要求频率稳定度 $\pm 10\text{ppm}$
 $TS \geq 10\text{ppm/pF}$ $CL = 10\text{pF}$
 $DL \geq 100\text{uW}$

Pin10和Pin23, V_CORE芯片外部也需要连一起增加电源连接可靠性




6. Package Physical Dimension

6.1 Package Dimensions

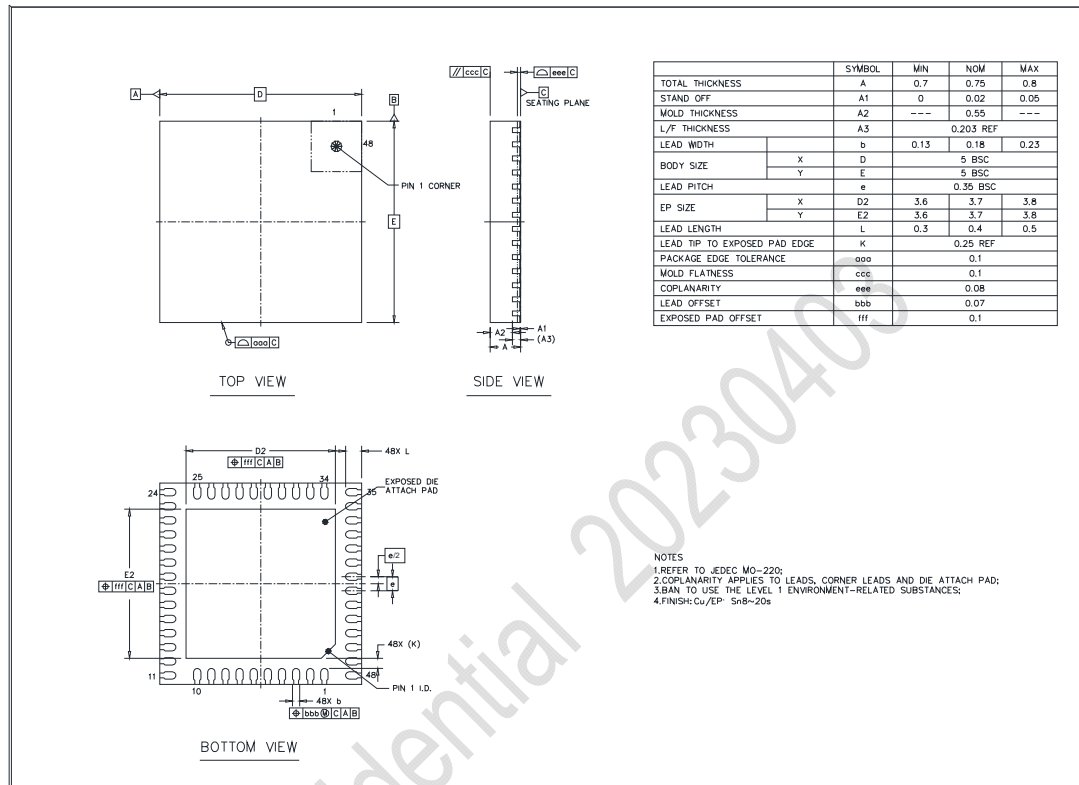



6.2 Product Identification

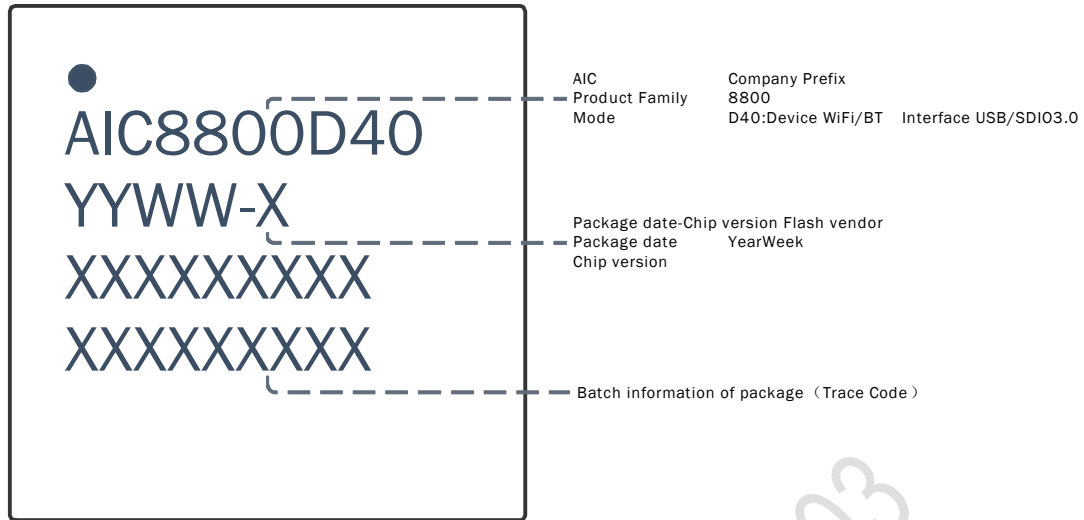

	Band	BW	5G Fem	Package	Type	BT	Interface	Flash
D80	2.4G/5.8G	20/40/80	Integration	5x5 QFN48	Device	BTDM5.4	USB2.0/SDIO3.0	No
D40	2.4G/5.8G	20/40	Integration	5x5 QFN48	Device	BTDM5.4	USB2.0/SDIO3.0	No
D40L	2.4G/5.8G	20/40	Integration	5x5 QFN48	Device	BLE5.4	USB2.0/SDIO3.0	No
D80P	2.4G/5.8G	20/40/80	Integration	5x5 QFN48	Device	BTDM5.4	USB2.0/PCIE	No
M80	2.4G/5.8G	20/40/80	Integration	5x5 QFN48	MCU	BTDM5.4	USB2.0/SDIO3.0	Integration
M80F	2.4G/5.8G	20/40/80	Integration	5x5 QFN48	MCU	BTDM5.4	USB2.0/SDIO3.0	External



7. Reliability characteristics

Table 7-1 Reliability test report

Test Items	Test Condition	Test Criteria
HTOL	$T_j \geq 125^{\circ}\text{C}$ 2000hrs	JESD22-A108F
ESD	HBM: $\pm 3000\text{V}$ Class 2	JS-001-2017
	CDM: $\pm 800\text{V}$ Class C2b	JS-002-2018
Latch up	$\pm 800\text{mA}$ Class I	JESD78
Solder ability	Steam aging: 8hrs; 245°C , 5s	J-STD-002D-2013
High Temperature Storage	150°C (1000h)	JESD22-A103
TCT	$-65^{\circ}\text{C} \sim 150^{\circ}\text{C}$, Dwell=15min, 500/1000Cycles	JESD22-A104E-2014
uHAST	130°C /85%RH/ 33.3psig/96hrs	JESD22-A118
PCT	121°C , 100%RH, 205 kPa, 96/168hrs	JESD22-A102E-2015
Moisture sensitivity level	Level 3 Bake: 125°C , 24hrs Soak: 30°C , 60%	J-STD-020D

8. Solder Reflow Profile

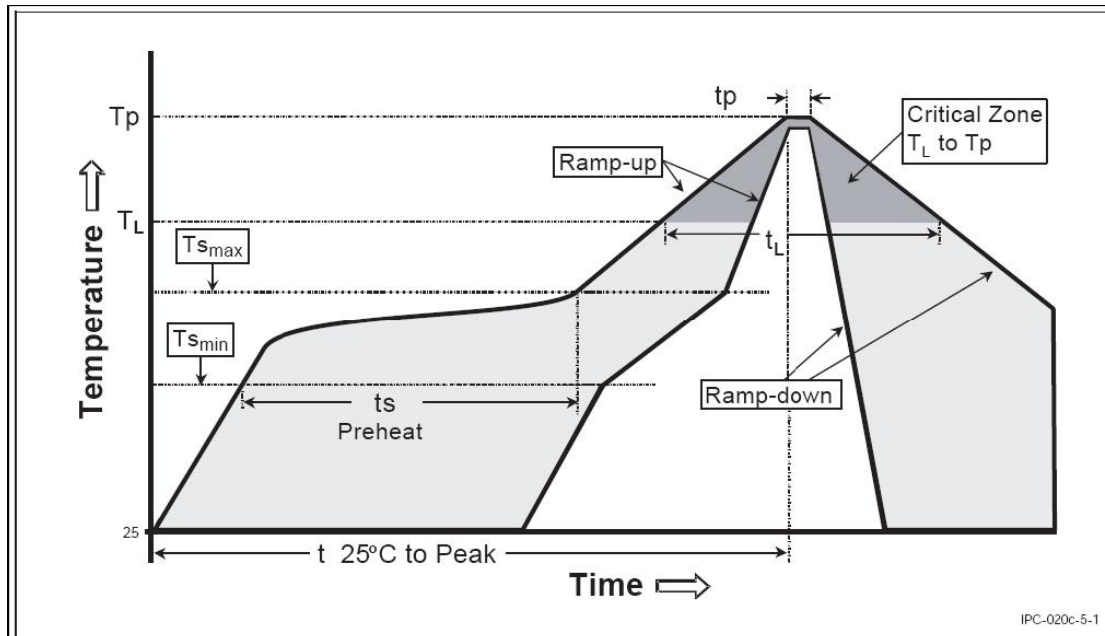


Figure8-1 Classification Reflow Profile

Table 8-1 Classification Reflow Profiles

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average Ramp-Up Rate (TSmax to Tp)	3 °C/second max.	3 °C/second max.
Preheat		
-Temperature Min (T _{min})	100 °C	150 °C
-Temperature Max (T _{max})	100 °C	200 °C
-Time (t _{min} to t _{max})	60-120 seconds	60-180 seconds
Time maintained above:		
-Temperature (T _L)	183 °C	217°C
-Time (t _L)	60-150seconds	60-150 seconds
Peak /Classification Temperature(T _p)	See Table 11-2	See Table 11-3
Time within 5 oC of actual Peak Temperature (t _p)	10-30 seconds	20-40 seconds
Ramp-Down Rate	6 °C/second max.	6 °C/seconds max.
Time 25 oC to Peak Temperature	6 minutes max.	8 minutes max.


Table 8-2 Sn-Pb Eutectic Process – Package Peak Reflow Temperatures

Package Thickness	Volume mm3 <350	Volume mm3 ≥350
<2.5mm	240 + 0/-5 °C	225 + 0/-5 °C
≥2.5mm	225 + 0/-5 °C	225 + 0/-5 °C

Table 8-3 Pb-free Process – Package Classification Reflow Temperatures

Package Thickness	Volume mm3 <350	Volume mm3 350-2000	Volume mm3 >2000
<1.6mm	260 + 0 °C *	260 + 0 °C *	260 + 0 °C *
1.6mm – 2.5mm	260 + 0 °C *	250 + 0 °C *	245 + 0 °C *
≥2.5mm	250 + 0 °C *	245 + 0 °C *	245 + 0 °C *
*Tolerance : The device manufacturer/supplier shall assure process compatibility up to and including the stated classification temperature(this mean Peak reflow temperature + 0 °C. For example 260+ 0 °C) at the rated MSL Level.			

Note 1: All temperature refers topside of the package. Measured on the package body surface.

Note 2: The profiling tolerance is + 0 °C, - X °C (based on machine variation capability)whatever is required to control the profile process but at no time will it exceed – 5 °C. The producer assures process compatibility at the peak reflow profile temperatures defined in Table 11-3.

Note 3: Package volume excludes external terminals (balls, bumps, lands, leads) and/or non integral heat sinks.

Note 4: The maximum component temperature reached during reflow depends on package the thickness and volume. The use of convection reflow processes reduces the thermal gradients between packages. However, thermal gradients due to differences in thermal mass of SMD package may still exist.

Note 5: Components intended for use in a “lead-free” assembly process shall be evaluated using the “lead free” classification temperatures and profiles defined in Table8-1, 8-2, 8-3 whether or not lead free.



9. Change List

The following table summarizes revisions to this document.

REV	DATE	AUTHER	CHANGE DESCRIPTION
V1.0	20230403	AICSEMI	

10. RoHS Compliant

The products meet the requirements of Directive 2011/65/EU of Europe Parliament and of the Council on the Restriction of Hazardous Substance (RoHS). The products are free from halogenated or antimony trioxide-based flame retardants and other hazardous chemicals.

11. ESD Sensitivity

Electrostatic discharge (ESD) occurs naturally in laboratory and factory environments. An established high-voltage potential is always at risk of discharging to a lower potential. If this discharge path is through a semiconductor device, destructive damage may result. ESD countermeasures and handling methods must be developed and used to control the factory environment at each manufacturing site. BES products must be handled according to the ESD Association standard: ANSI/ESD S20.20-1999, Protection of Electrical and Electronic Parts, Assemblies, and Equipment.



12 Disclaimer

The information provided here is believed to be reliable; AICSEMI assumes no reliability for inaccuracies and omissions. AICSEMI assumes no reliability for the use of this information and all such information should entirely be at the user's own risk. Specifications described and contained here are subjected to change without notice on the purpose of improving the design and performance. All of this information described herein should not be implied or granted for any third party. AICSEMI does not authorize or warrant any AICSEMI products for use in the life support devices or systems.

Copyright©2020 AICSEMI Inc. All rights reserved



For technical questions and additional information about AICSEMI Inc.:

Website: www.AICSEMI.com

Mailbox: support@AICSEMI.com

AICSEMI (Shanghai), Inc.

Tel: +86-10-84097662

Fax: +86-10-84097662

Confidential 2020403