

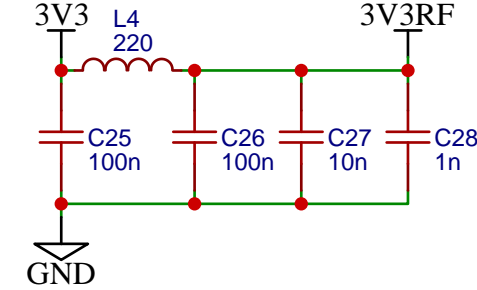
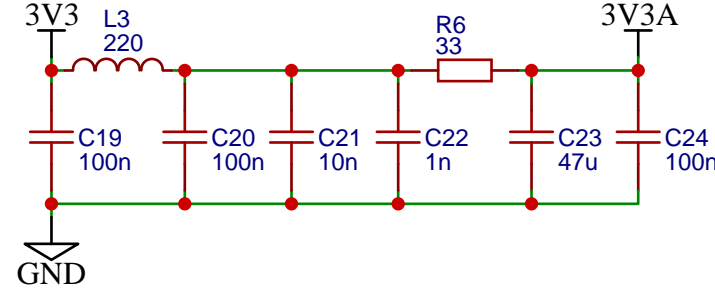
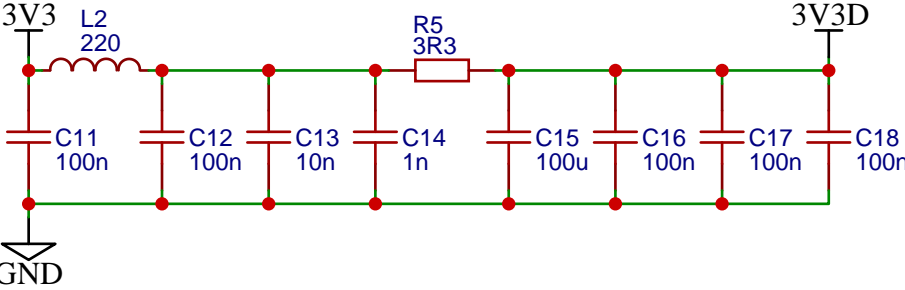






MP1482 input max 18V
Max Vin for TA6586 is 14V
Max Vin for MX1508 is 9.6V

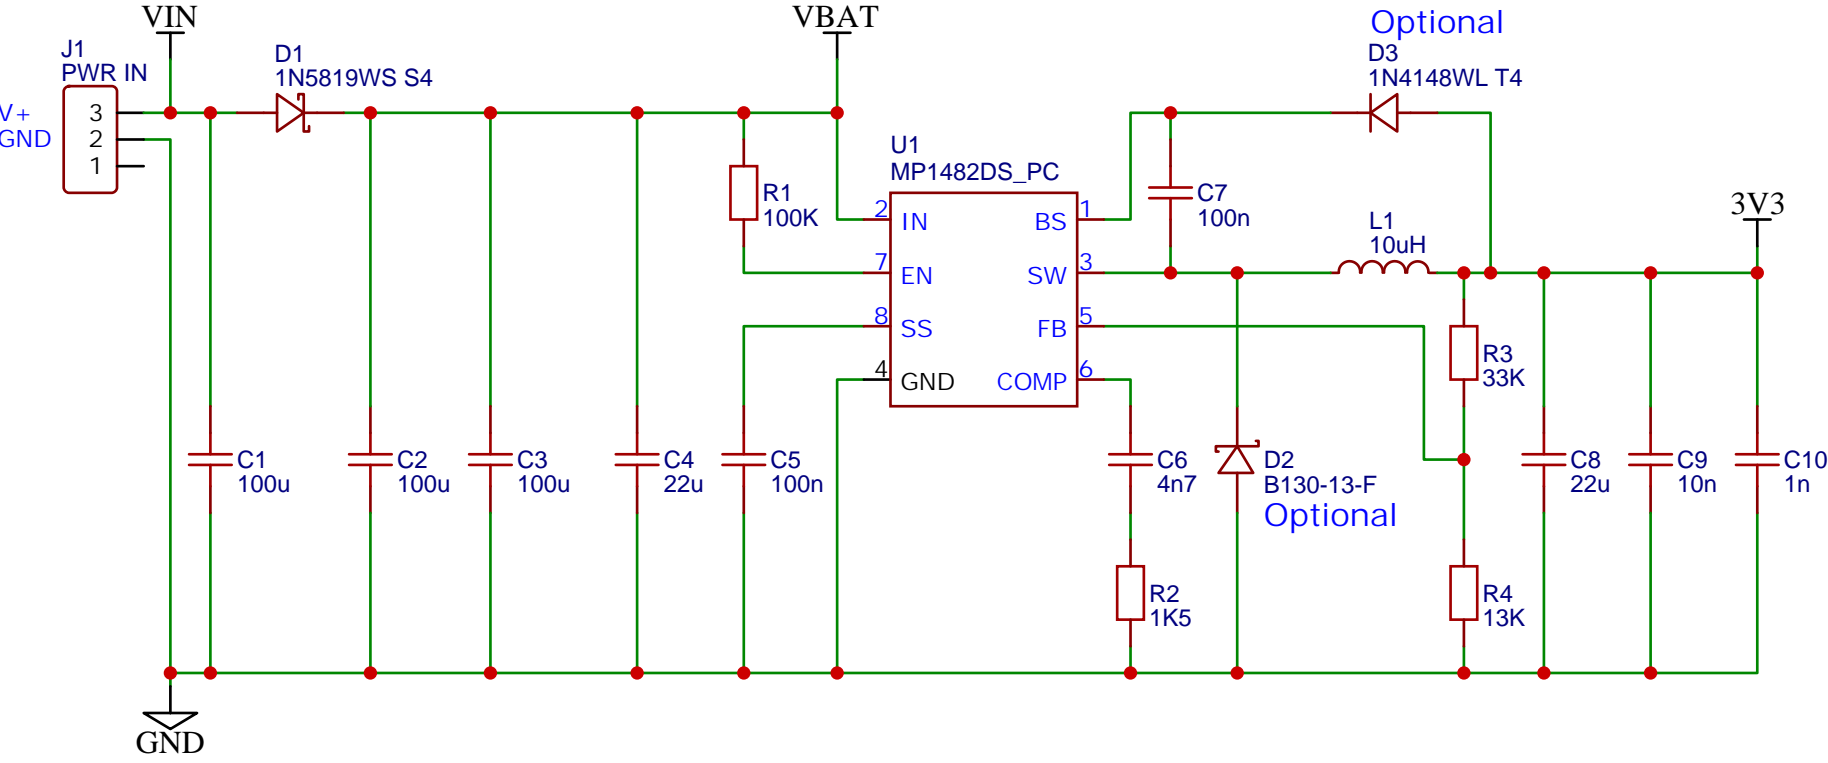

Reverse input protection

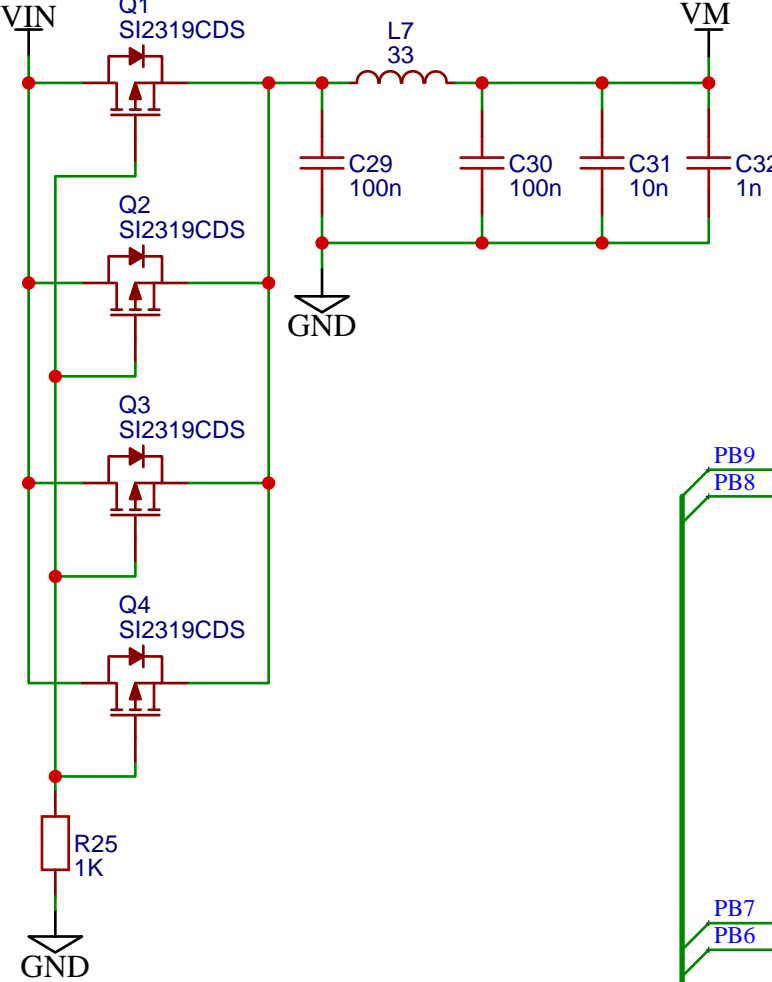

Power level measurement

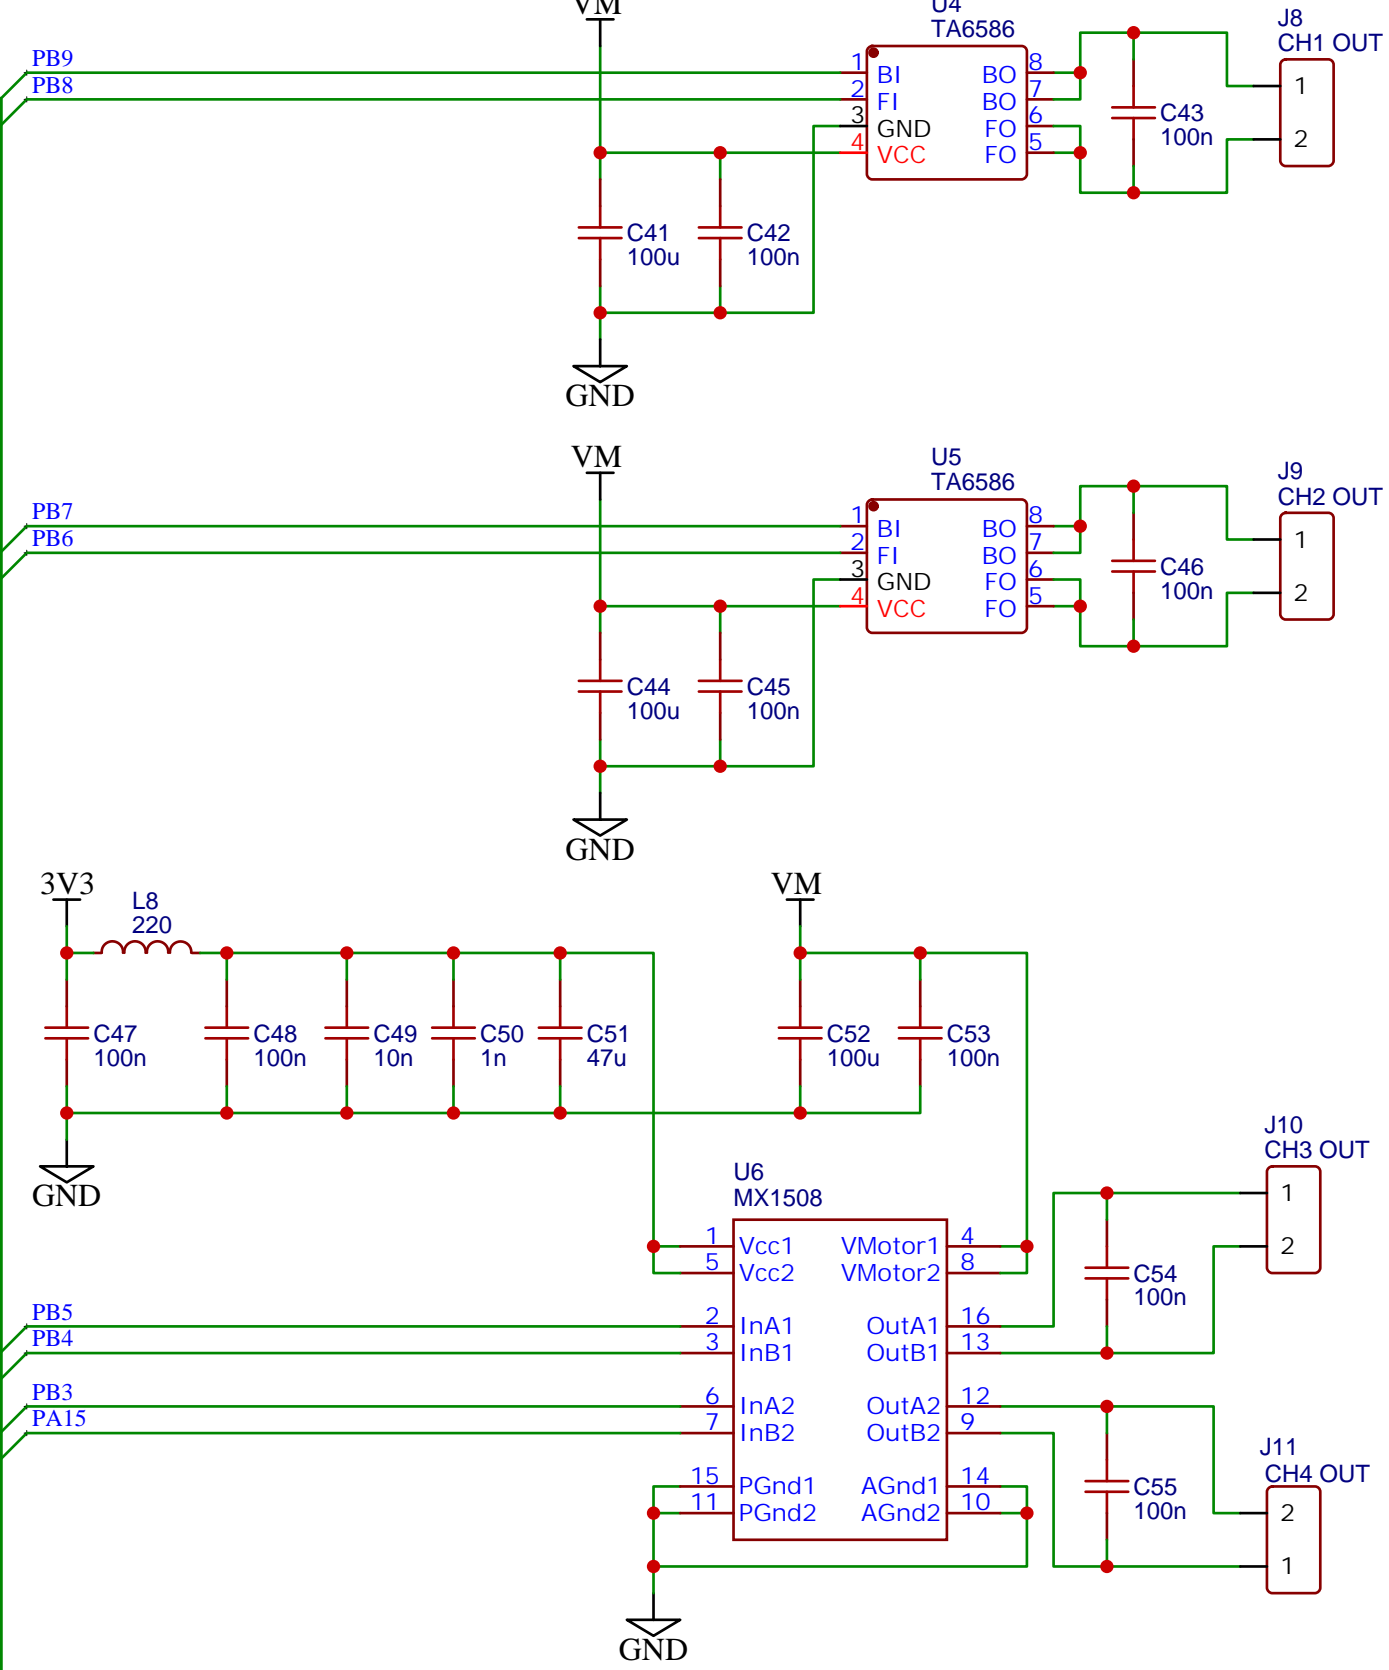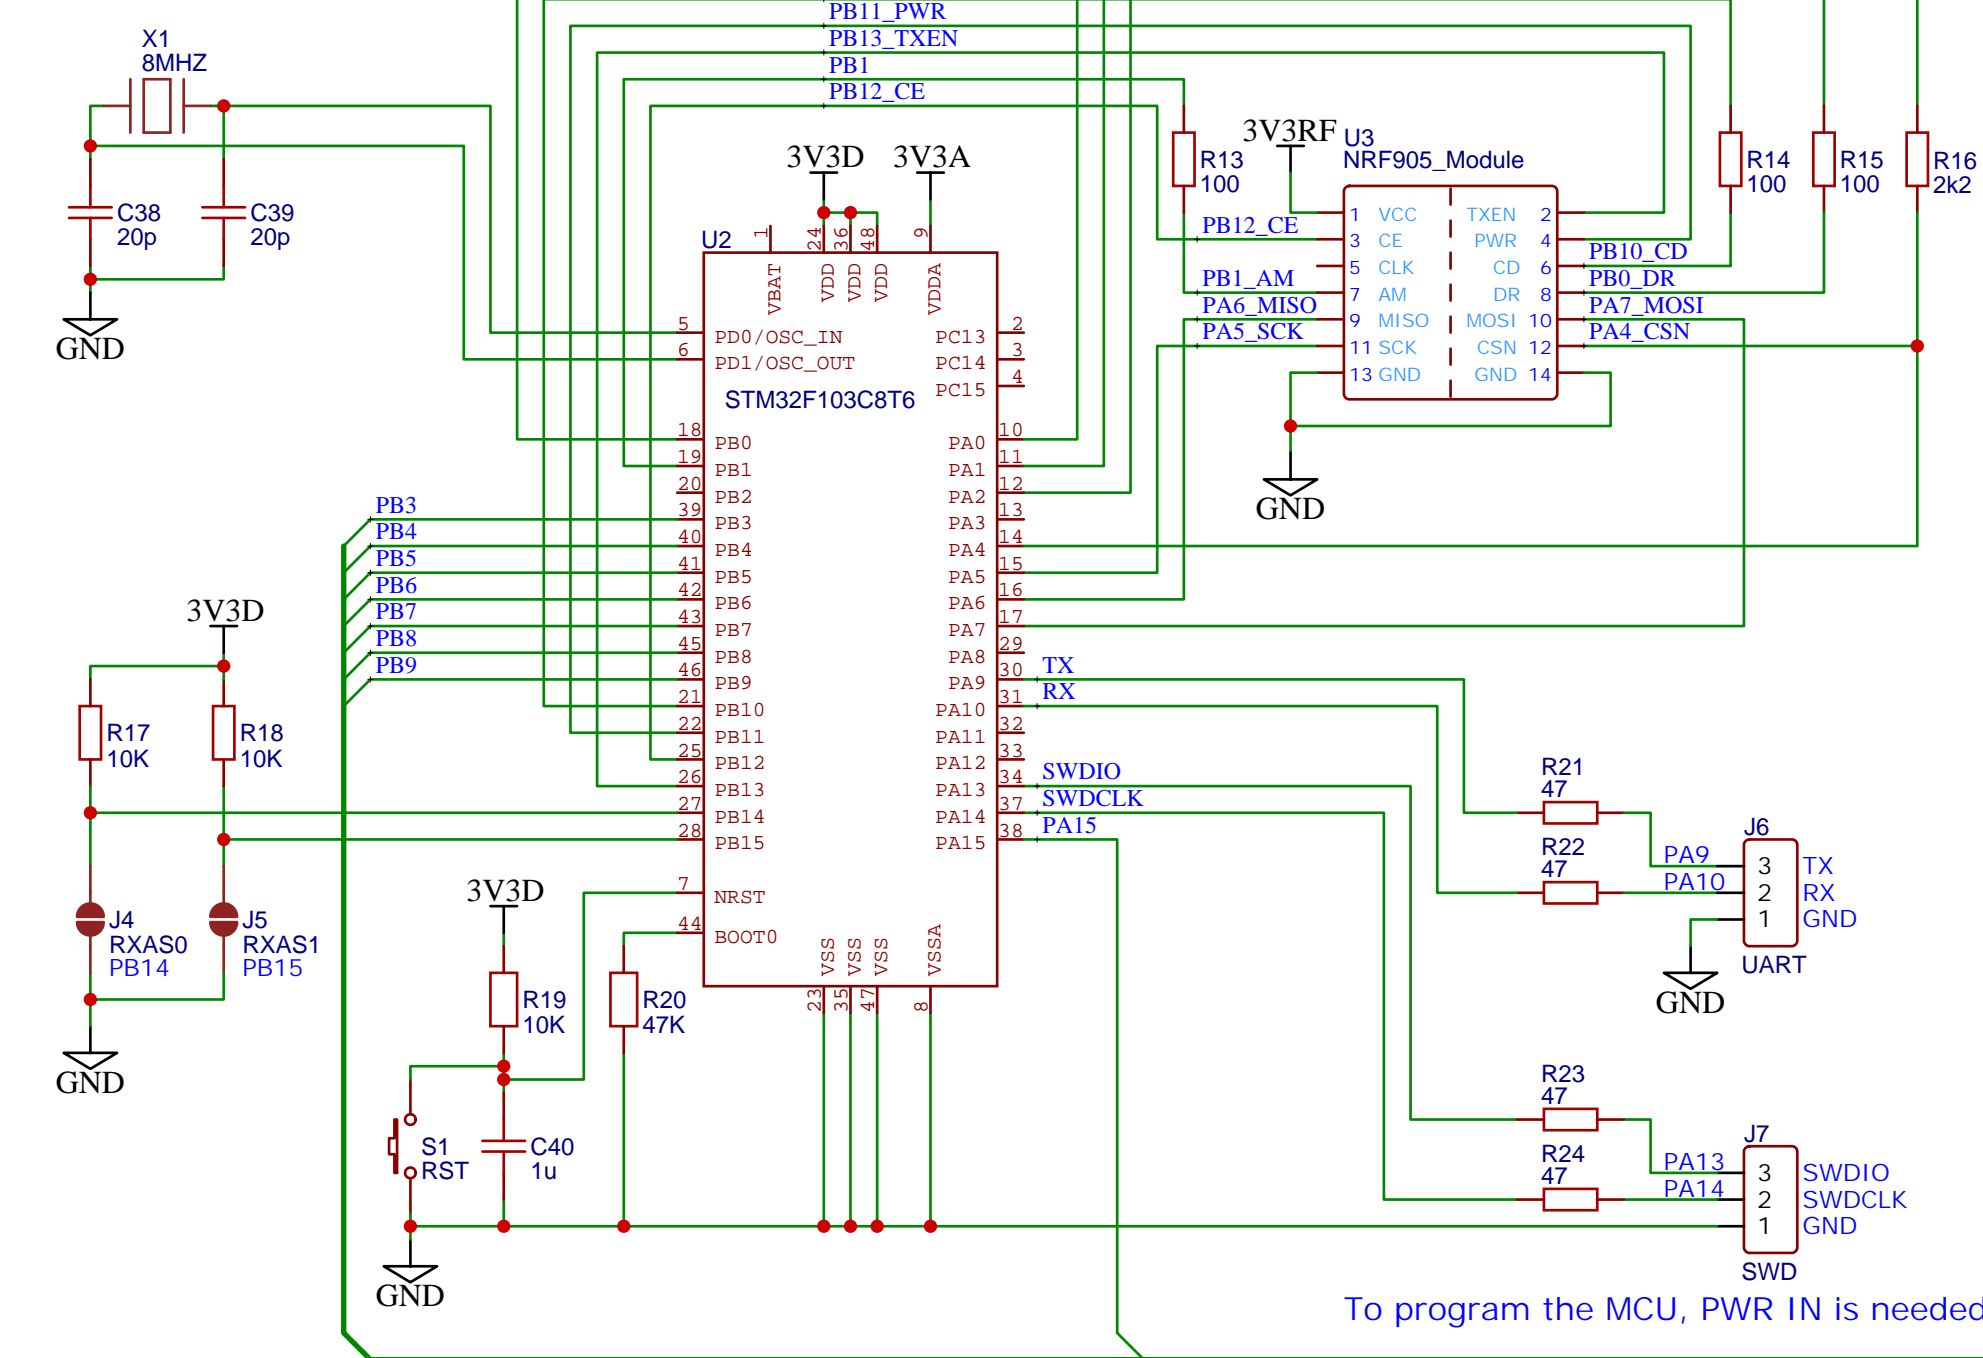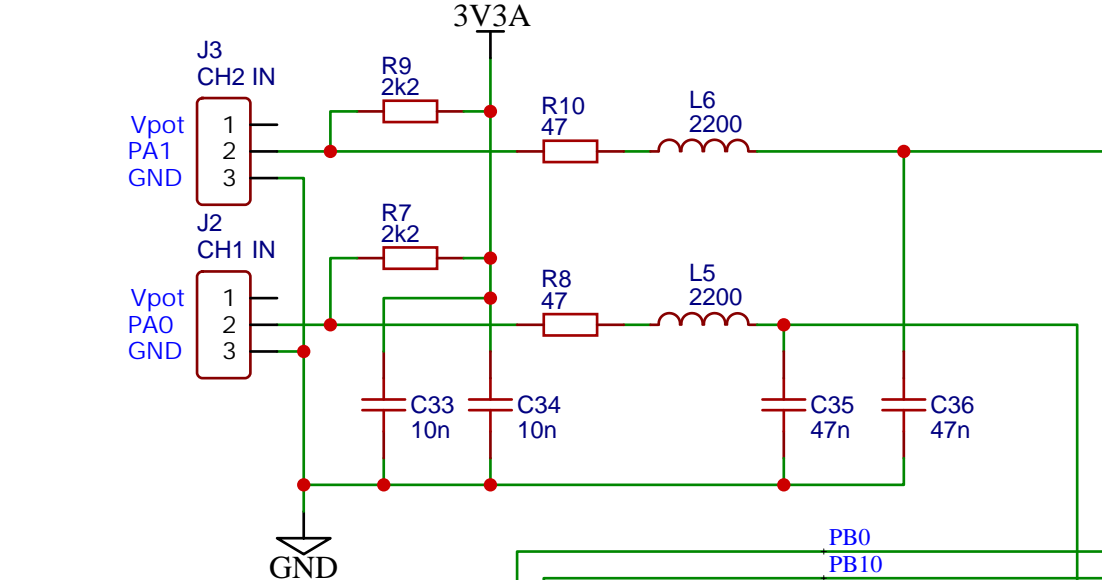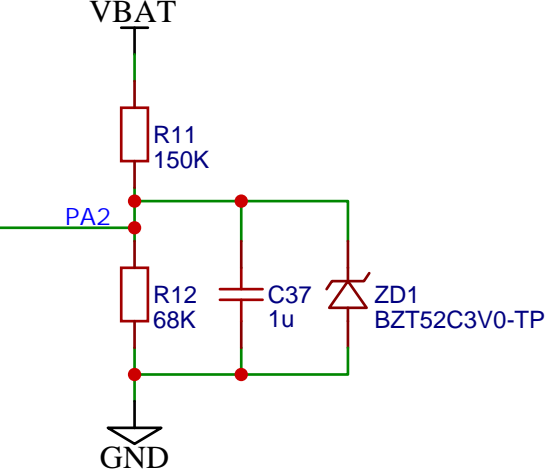

To program the MCU, PWR IN is needed