








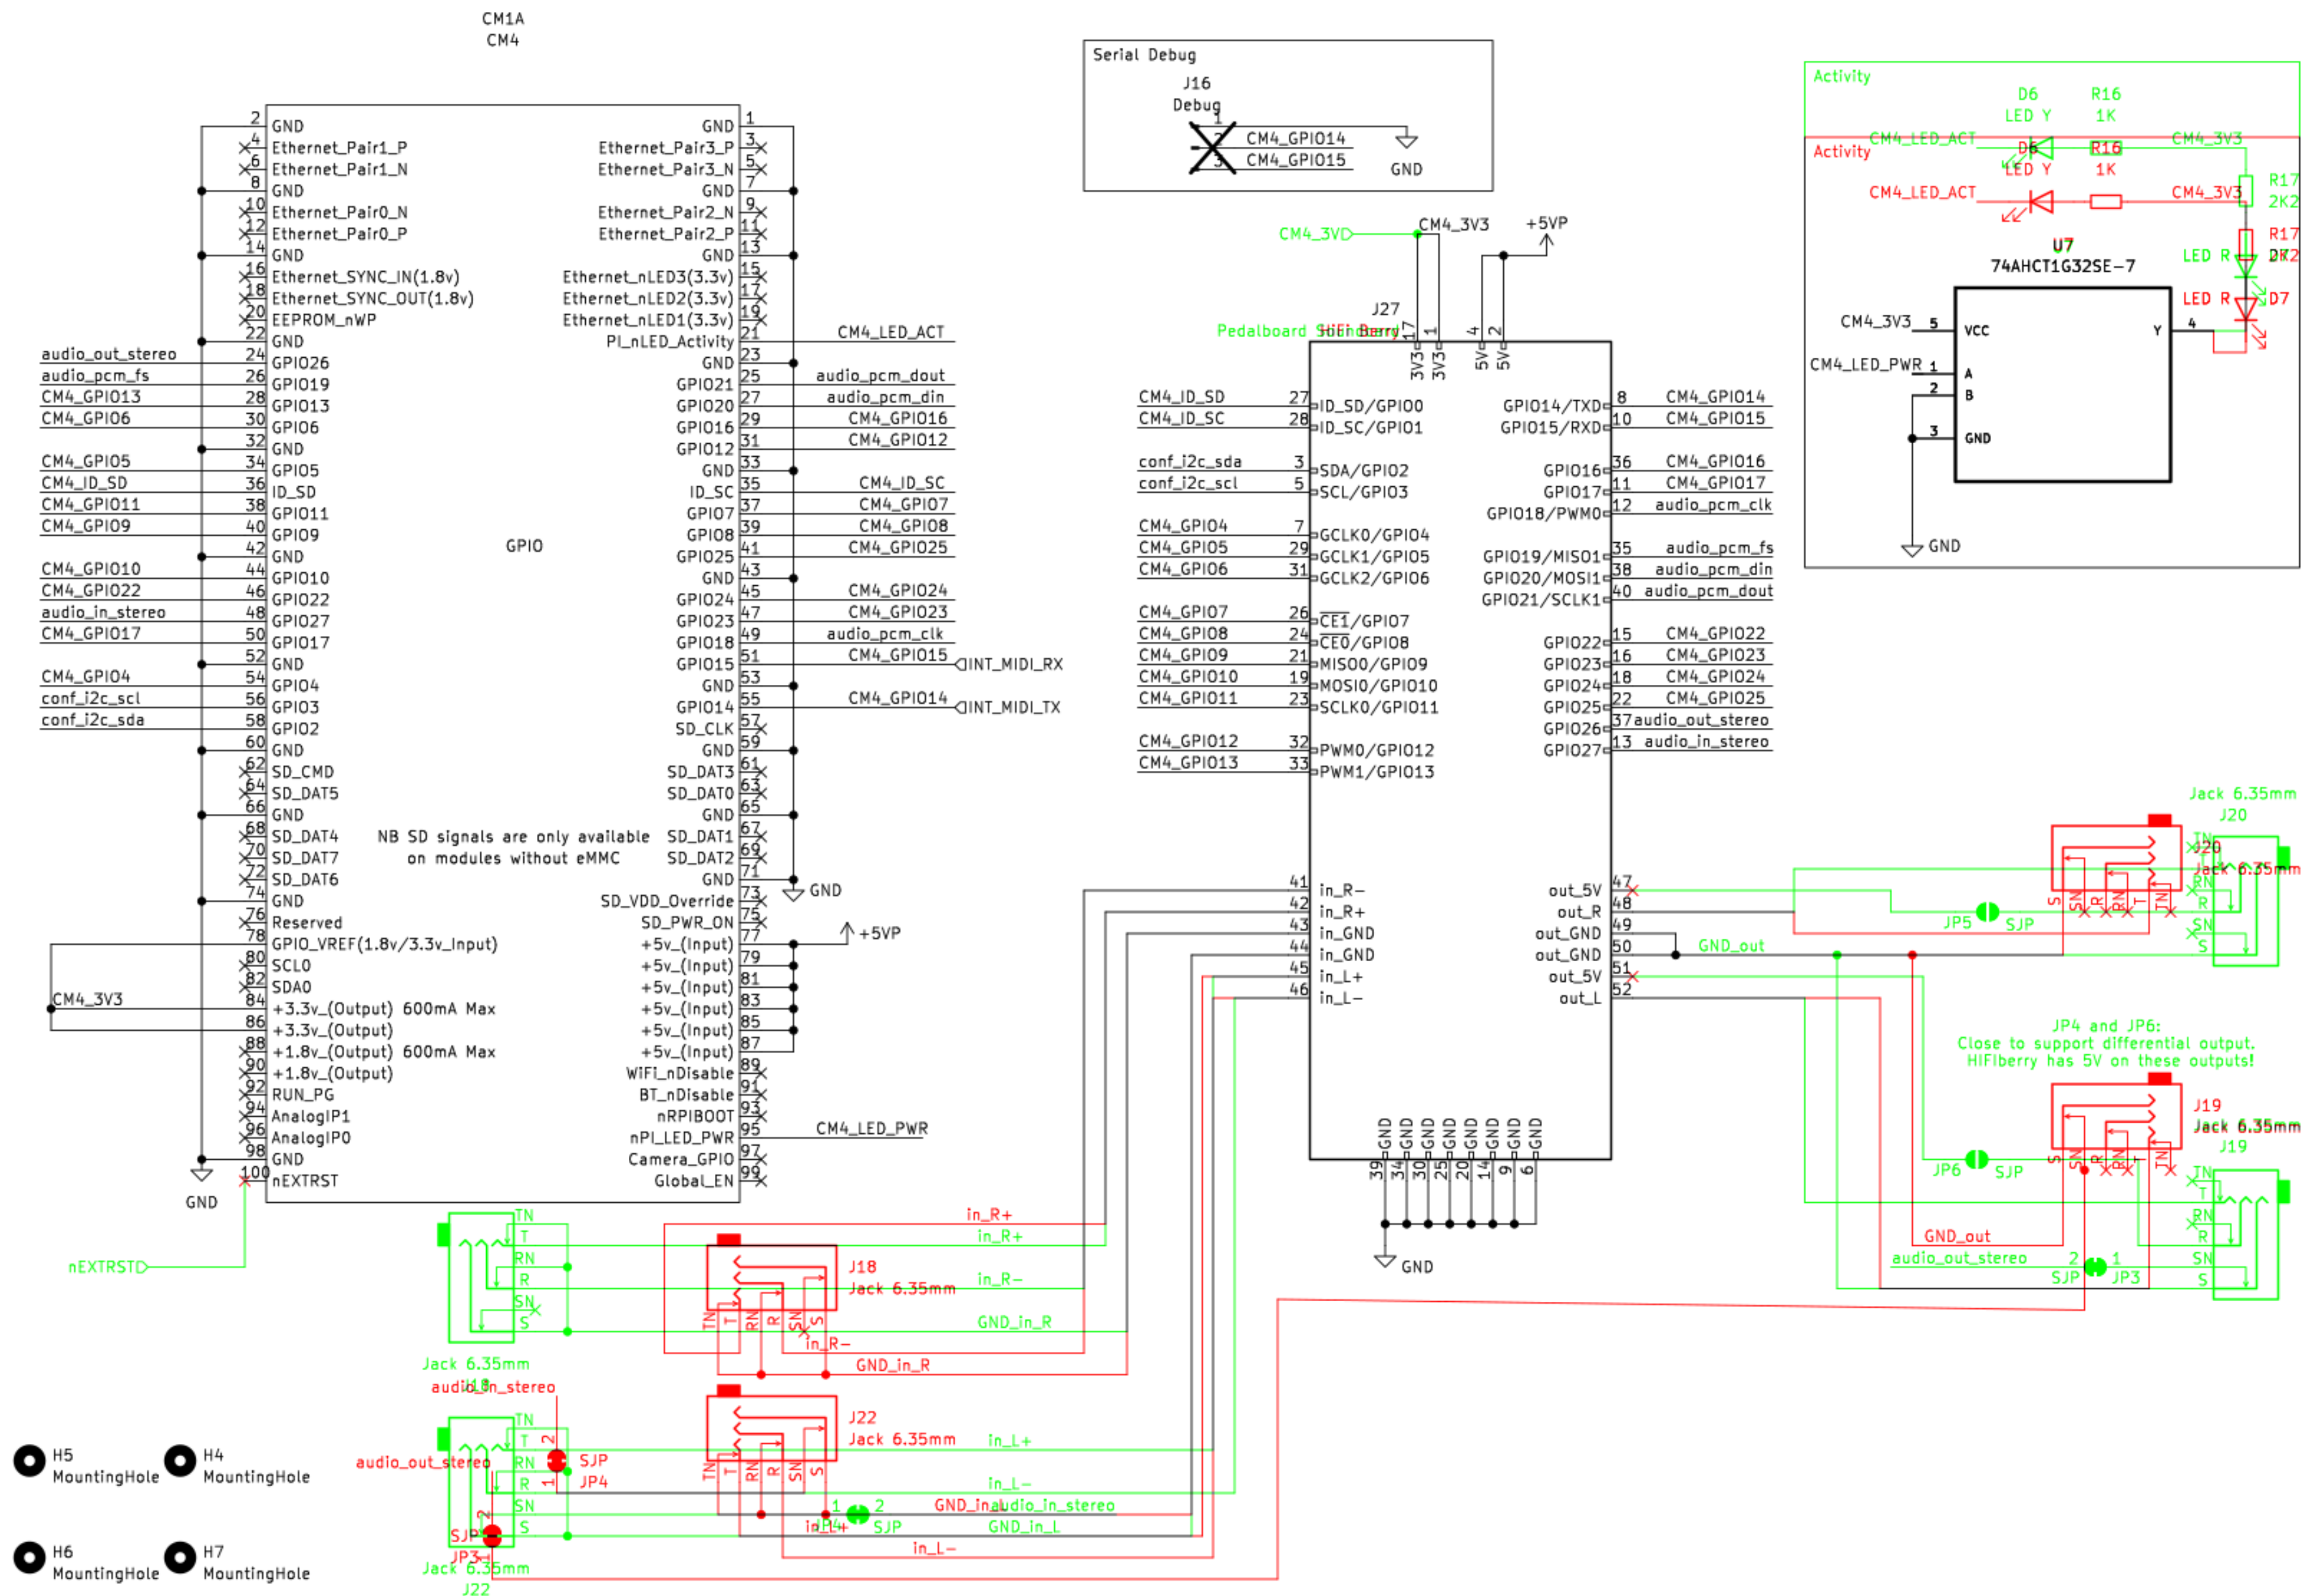
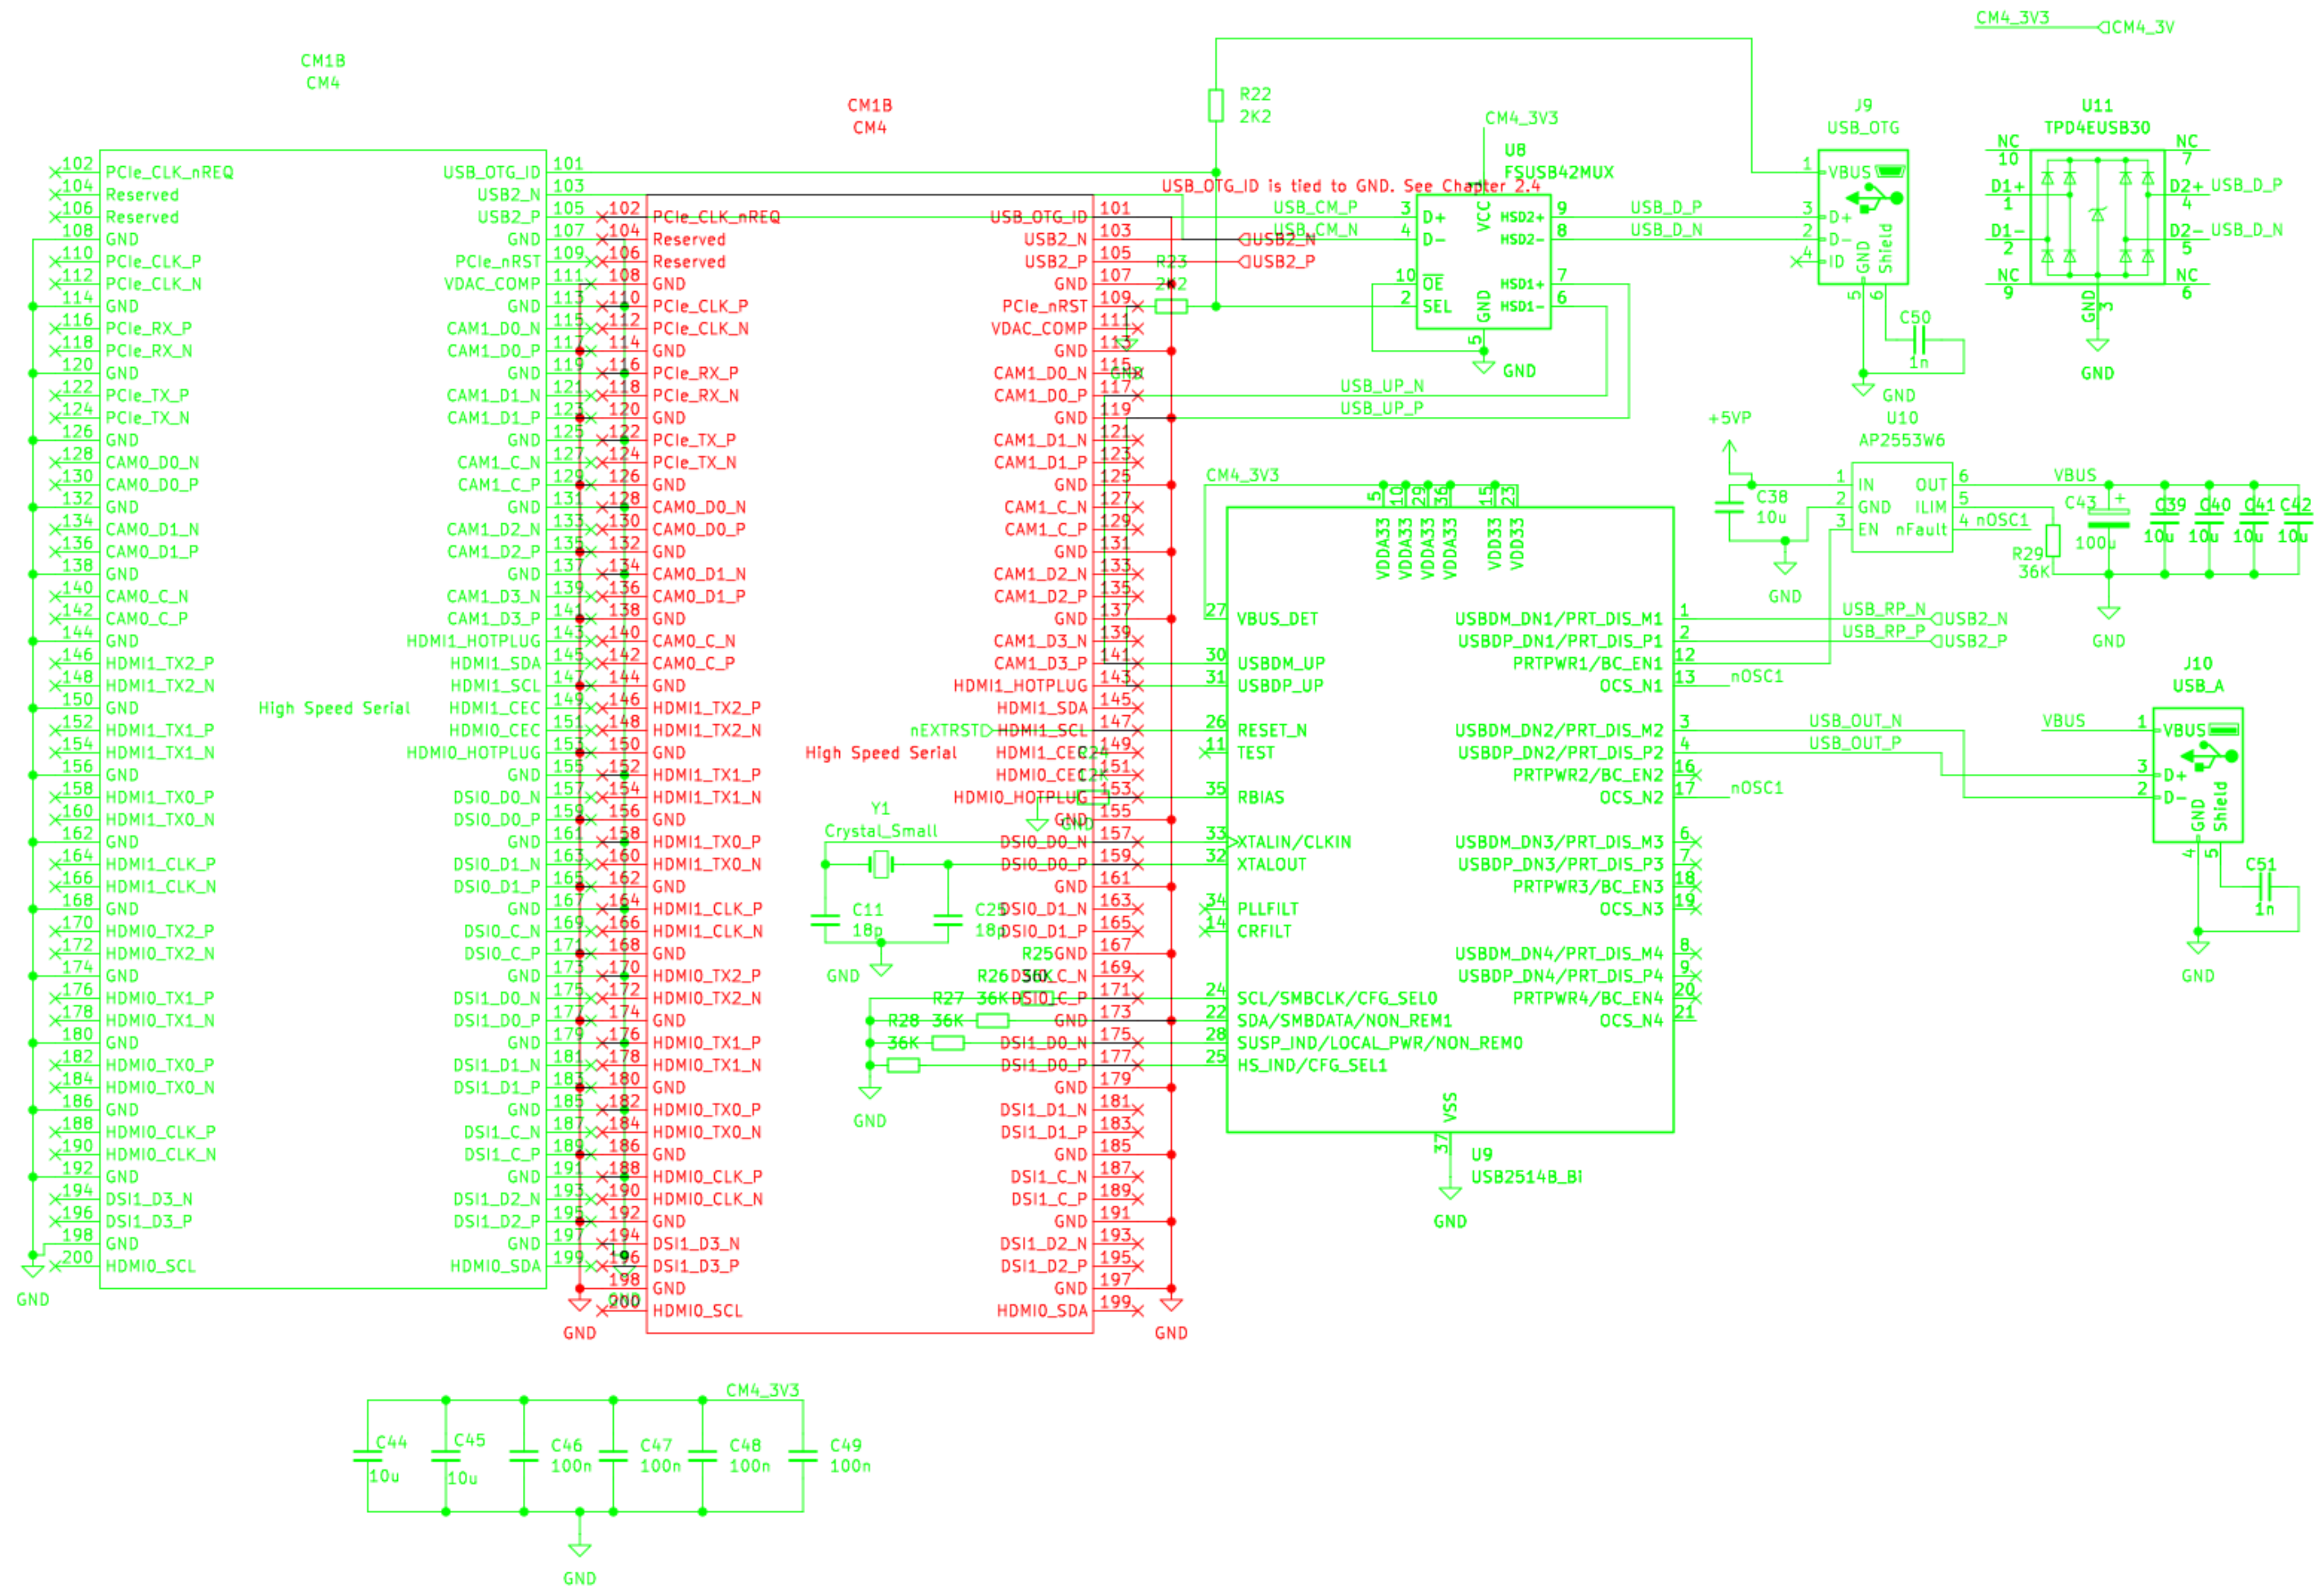


- | | |
|---|---|
|  H1 MountingHole |  H3 MountingHole |
|  H14 MountingHole |  H15 MountingHole |
|  H16 MountingHole | |
|  FID1 Fiducial |  FID4 Fiducial |
|  FID2 Fiducial |  FID3 Fiducial |







/Connectivity



/LEDs

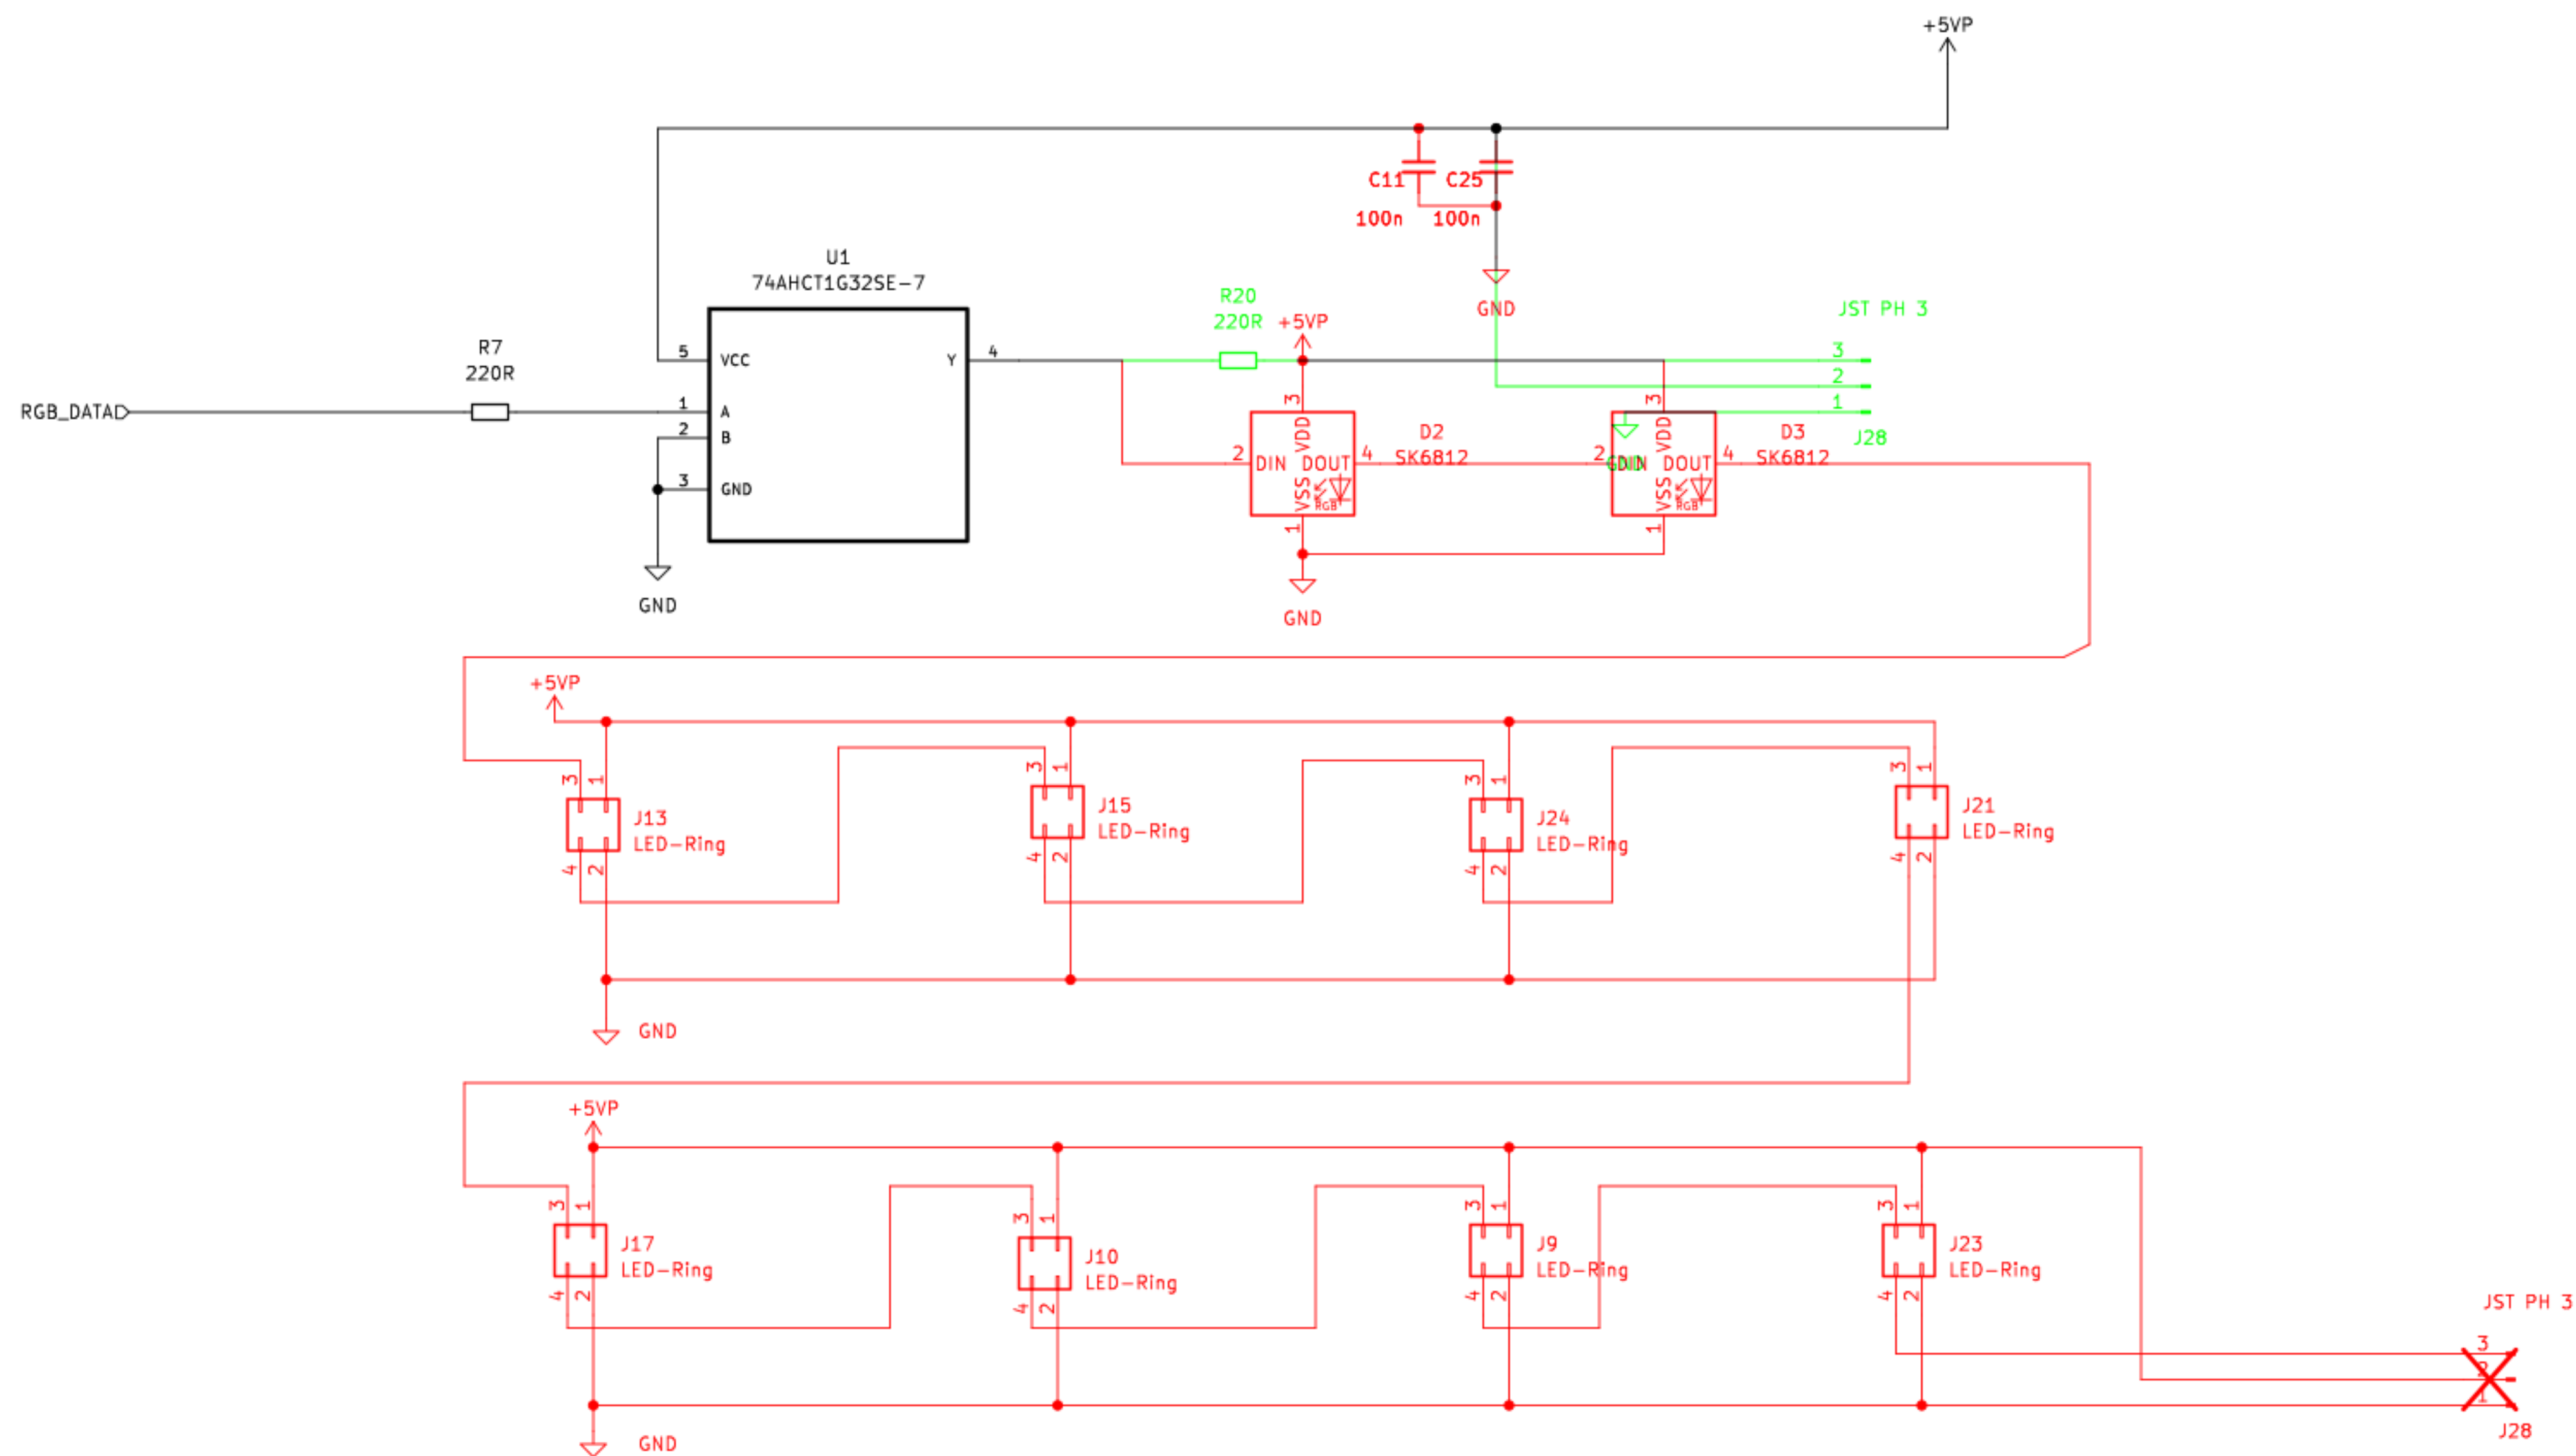

Either the single LEDs or the LED rings can be populated.

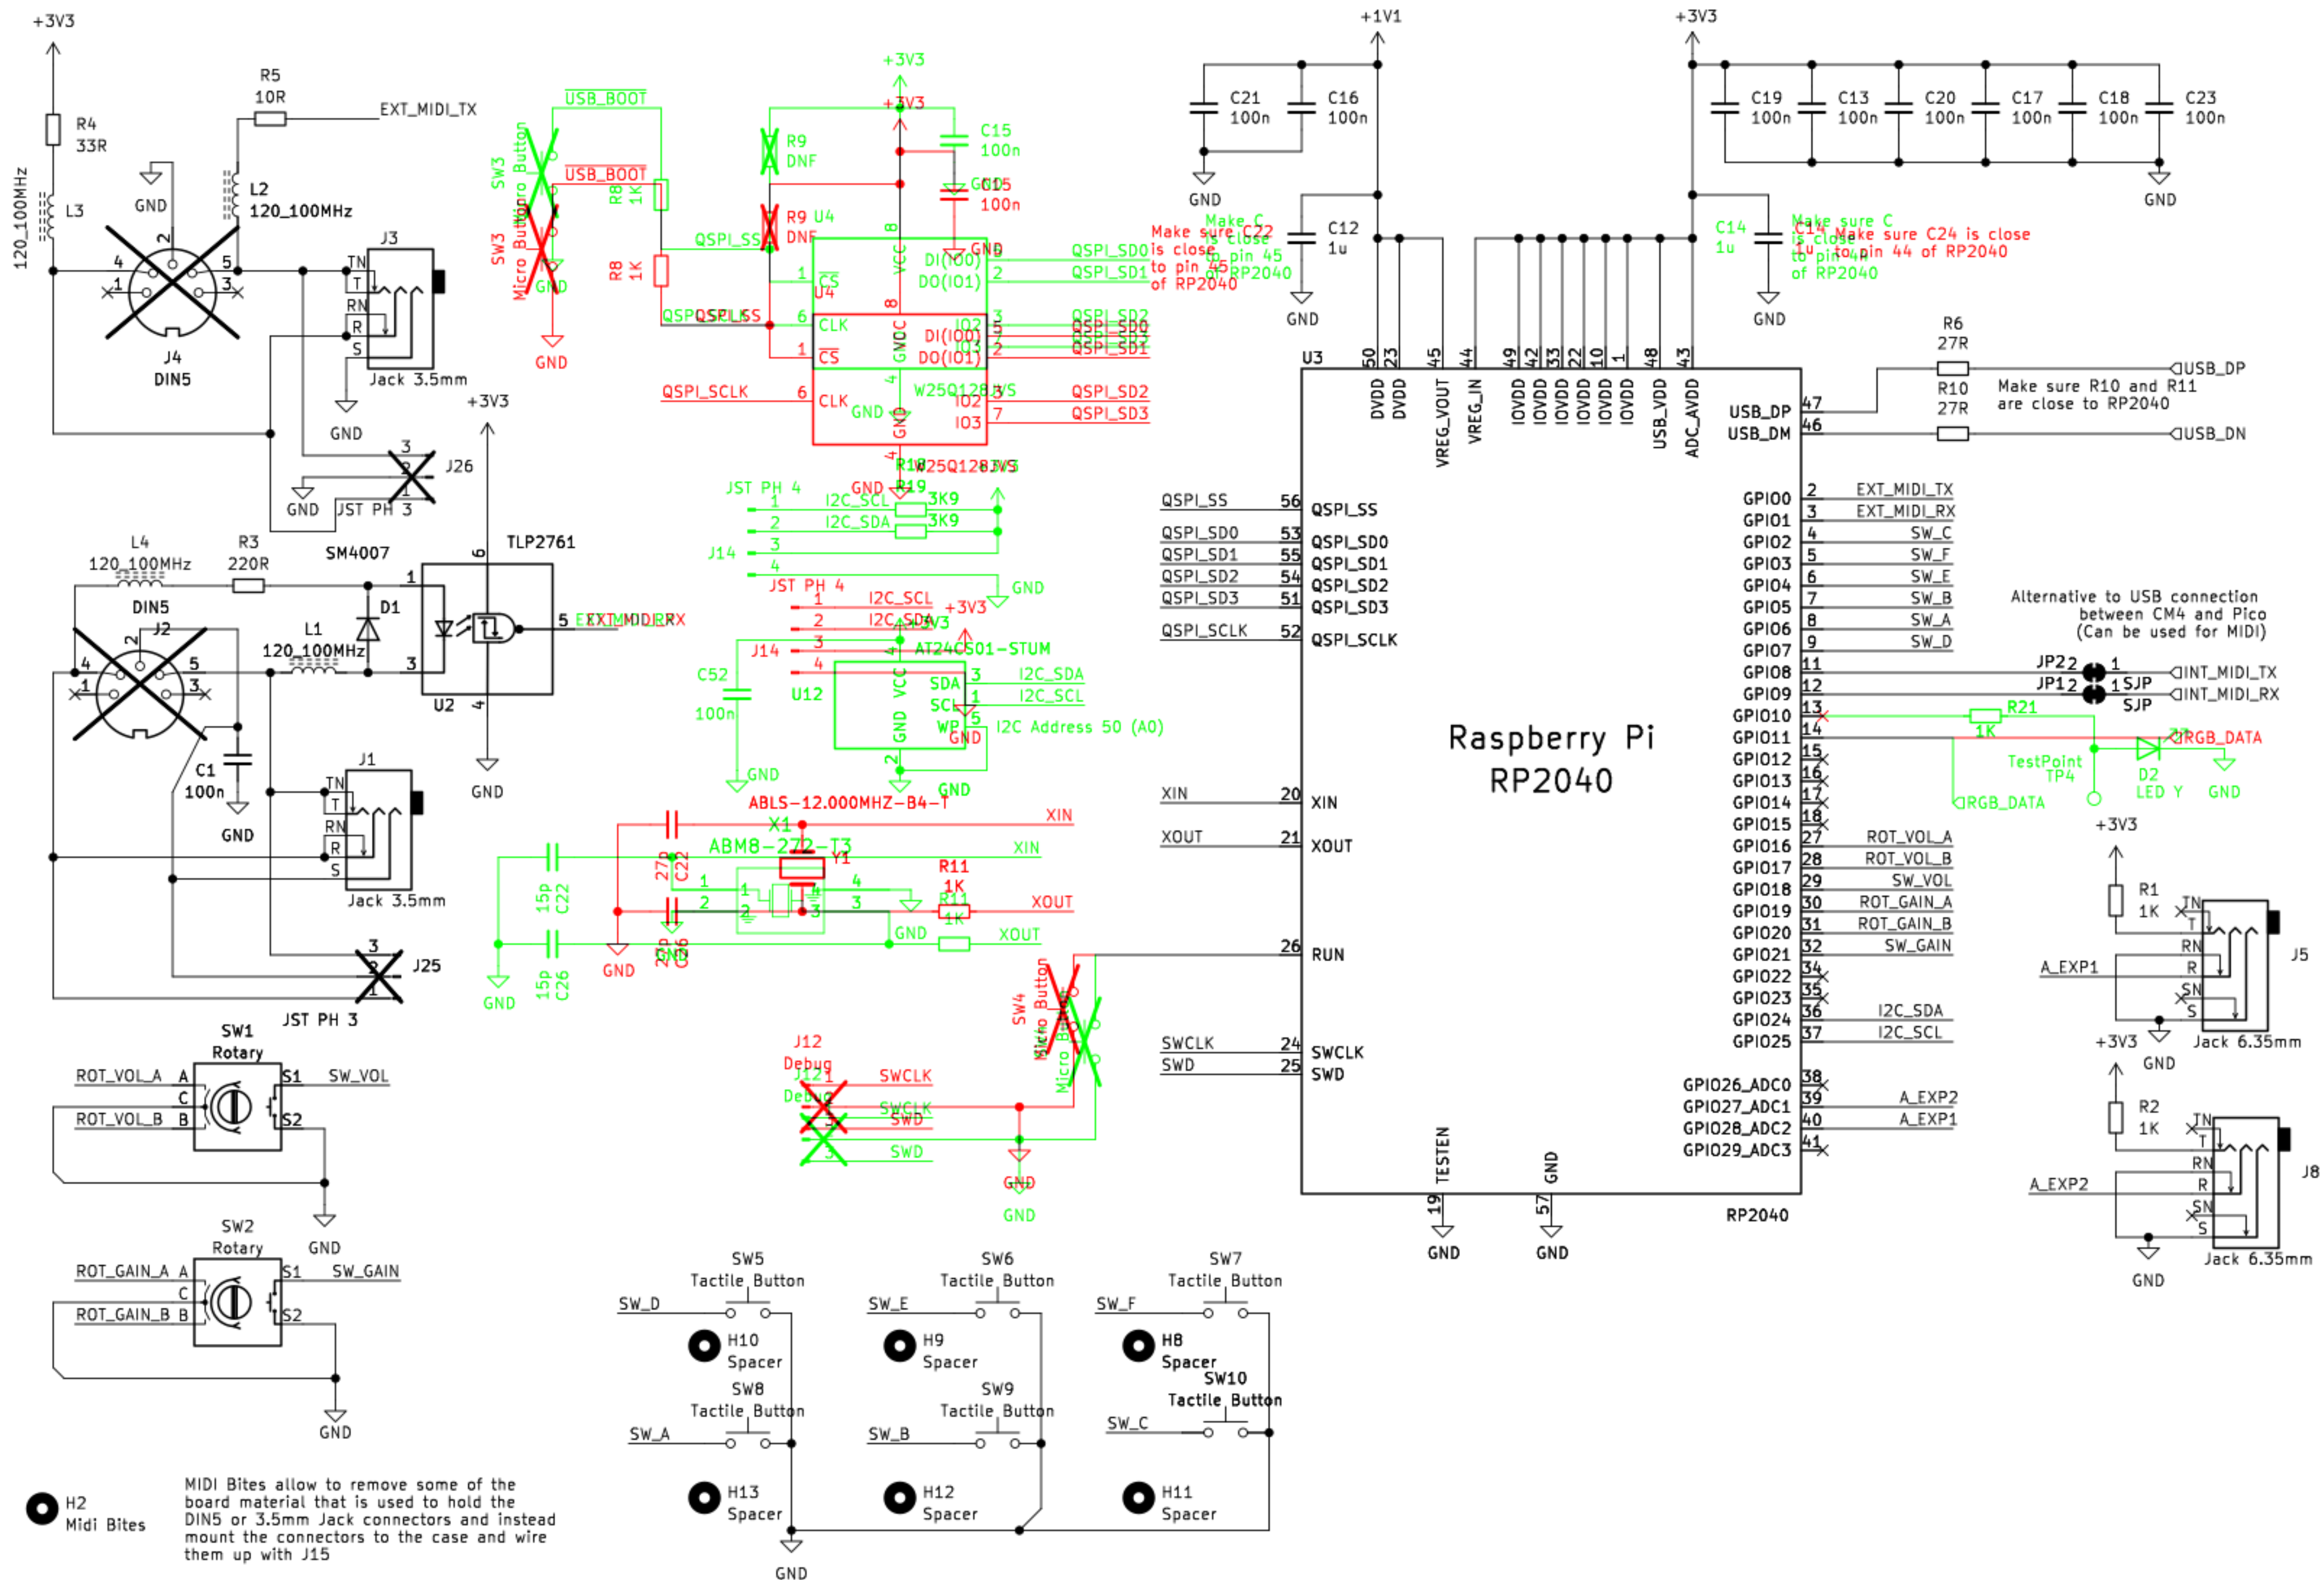


MIDI Bites allow to remove some of the board material that is used to hold the DIN5 or 3.5mm Jack connectors and instead mount the connectors to the case and wire them up with J15


/Power Supply

5.5mm x 2.1mm, Center Negative.

Reverse
Polarity
Protection

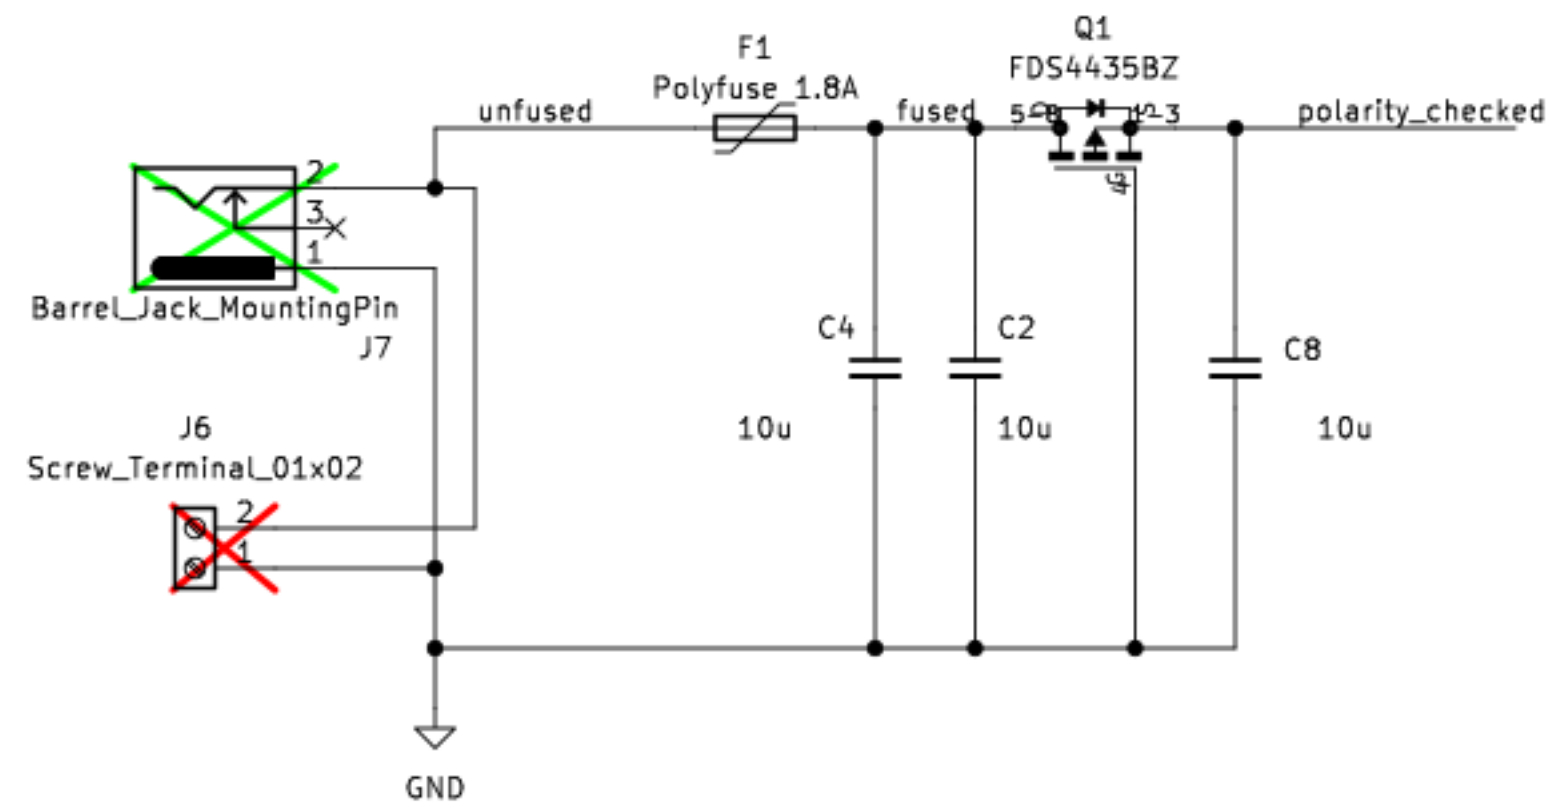

RP2040 power

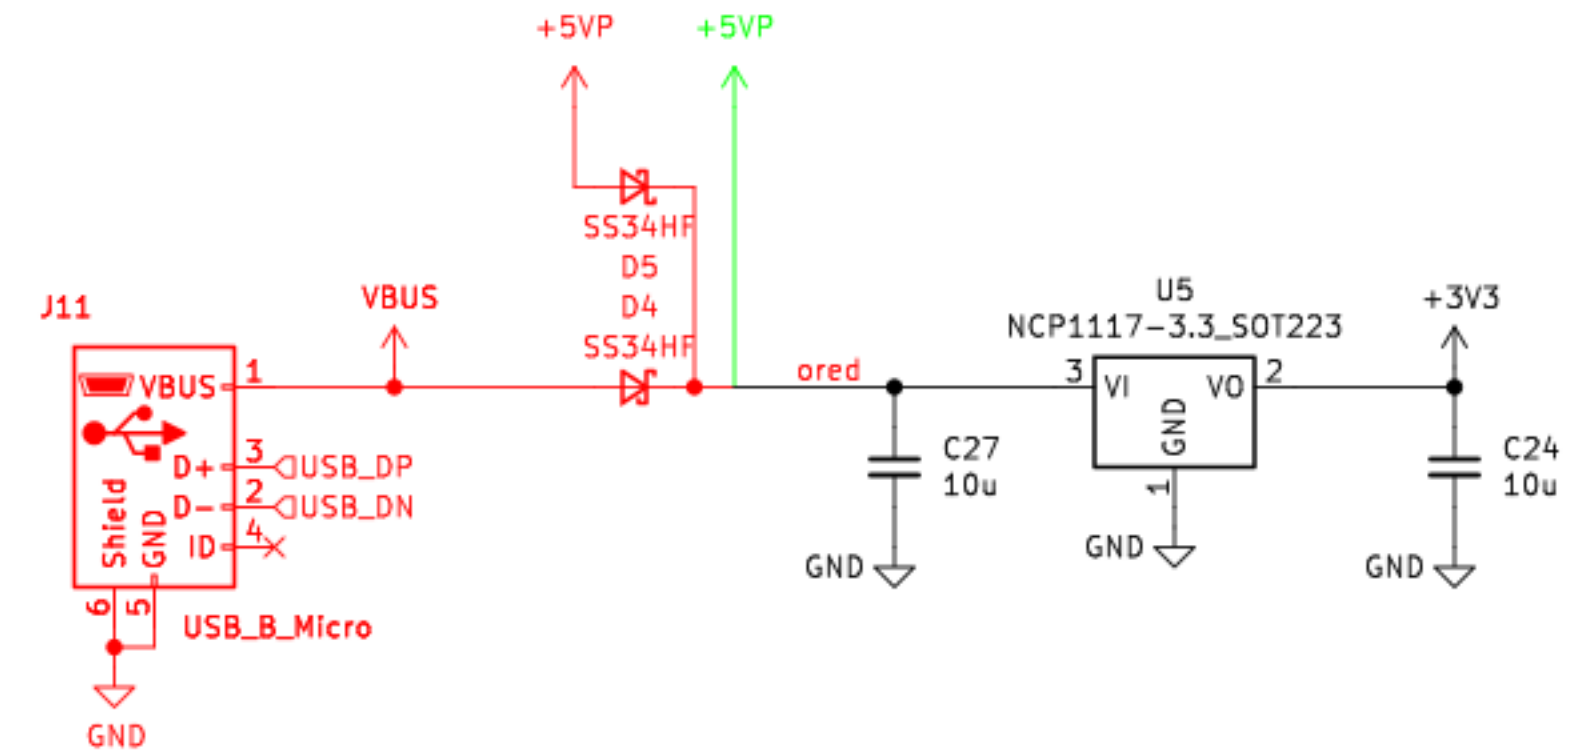

+5v @ 3A PSU (7.5v-28v Input)

