



H7 MountingHole H8 MountingHole H9 MountingHole

H10
MountingHole


H11
MountingHole

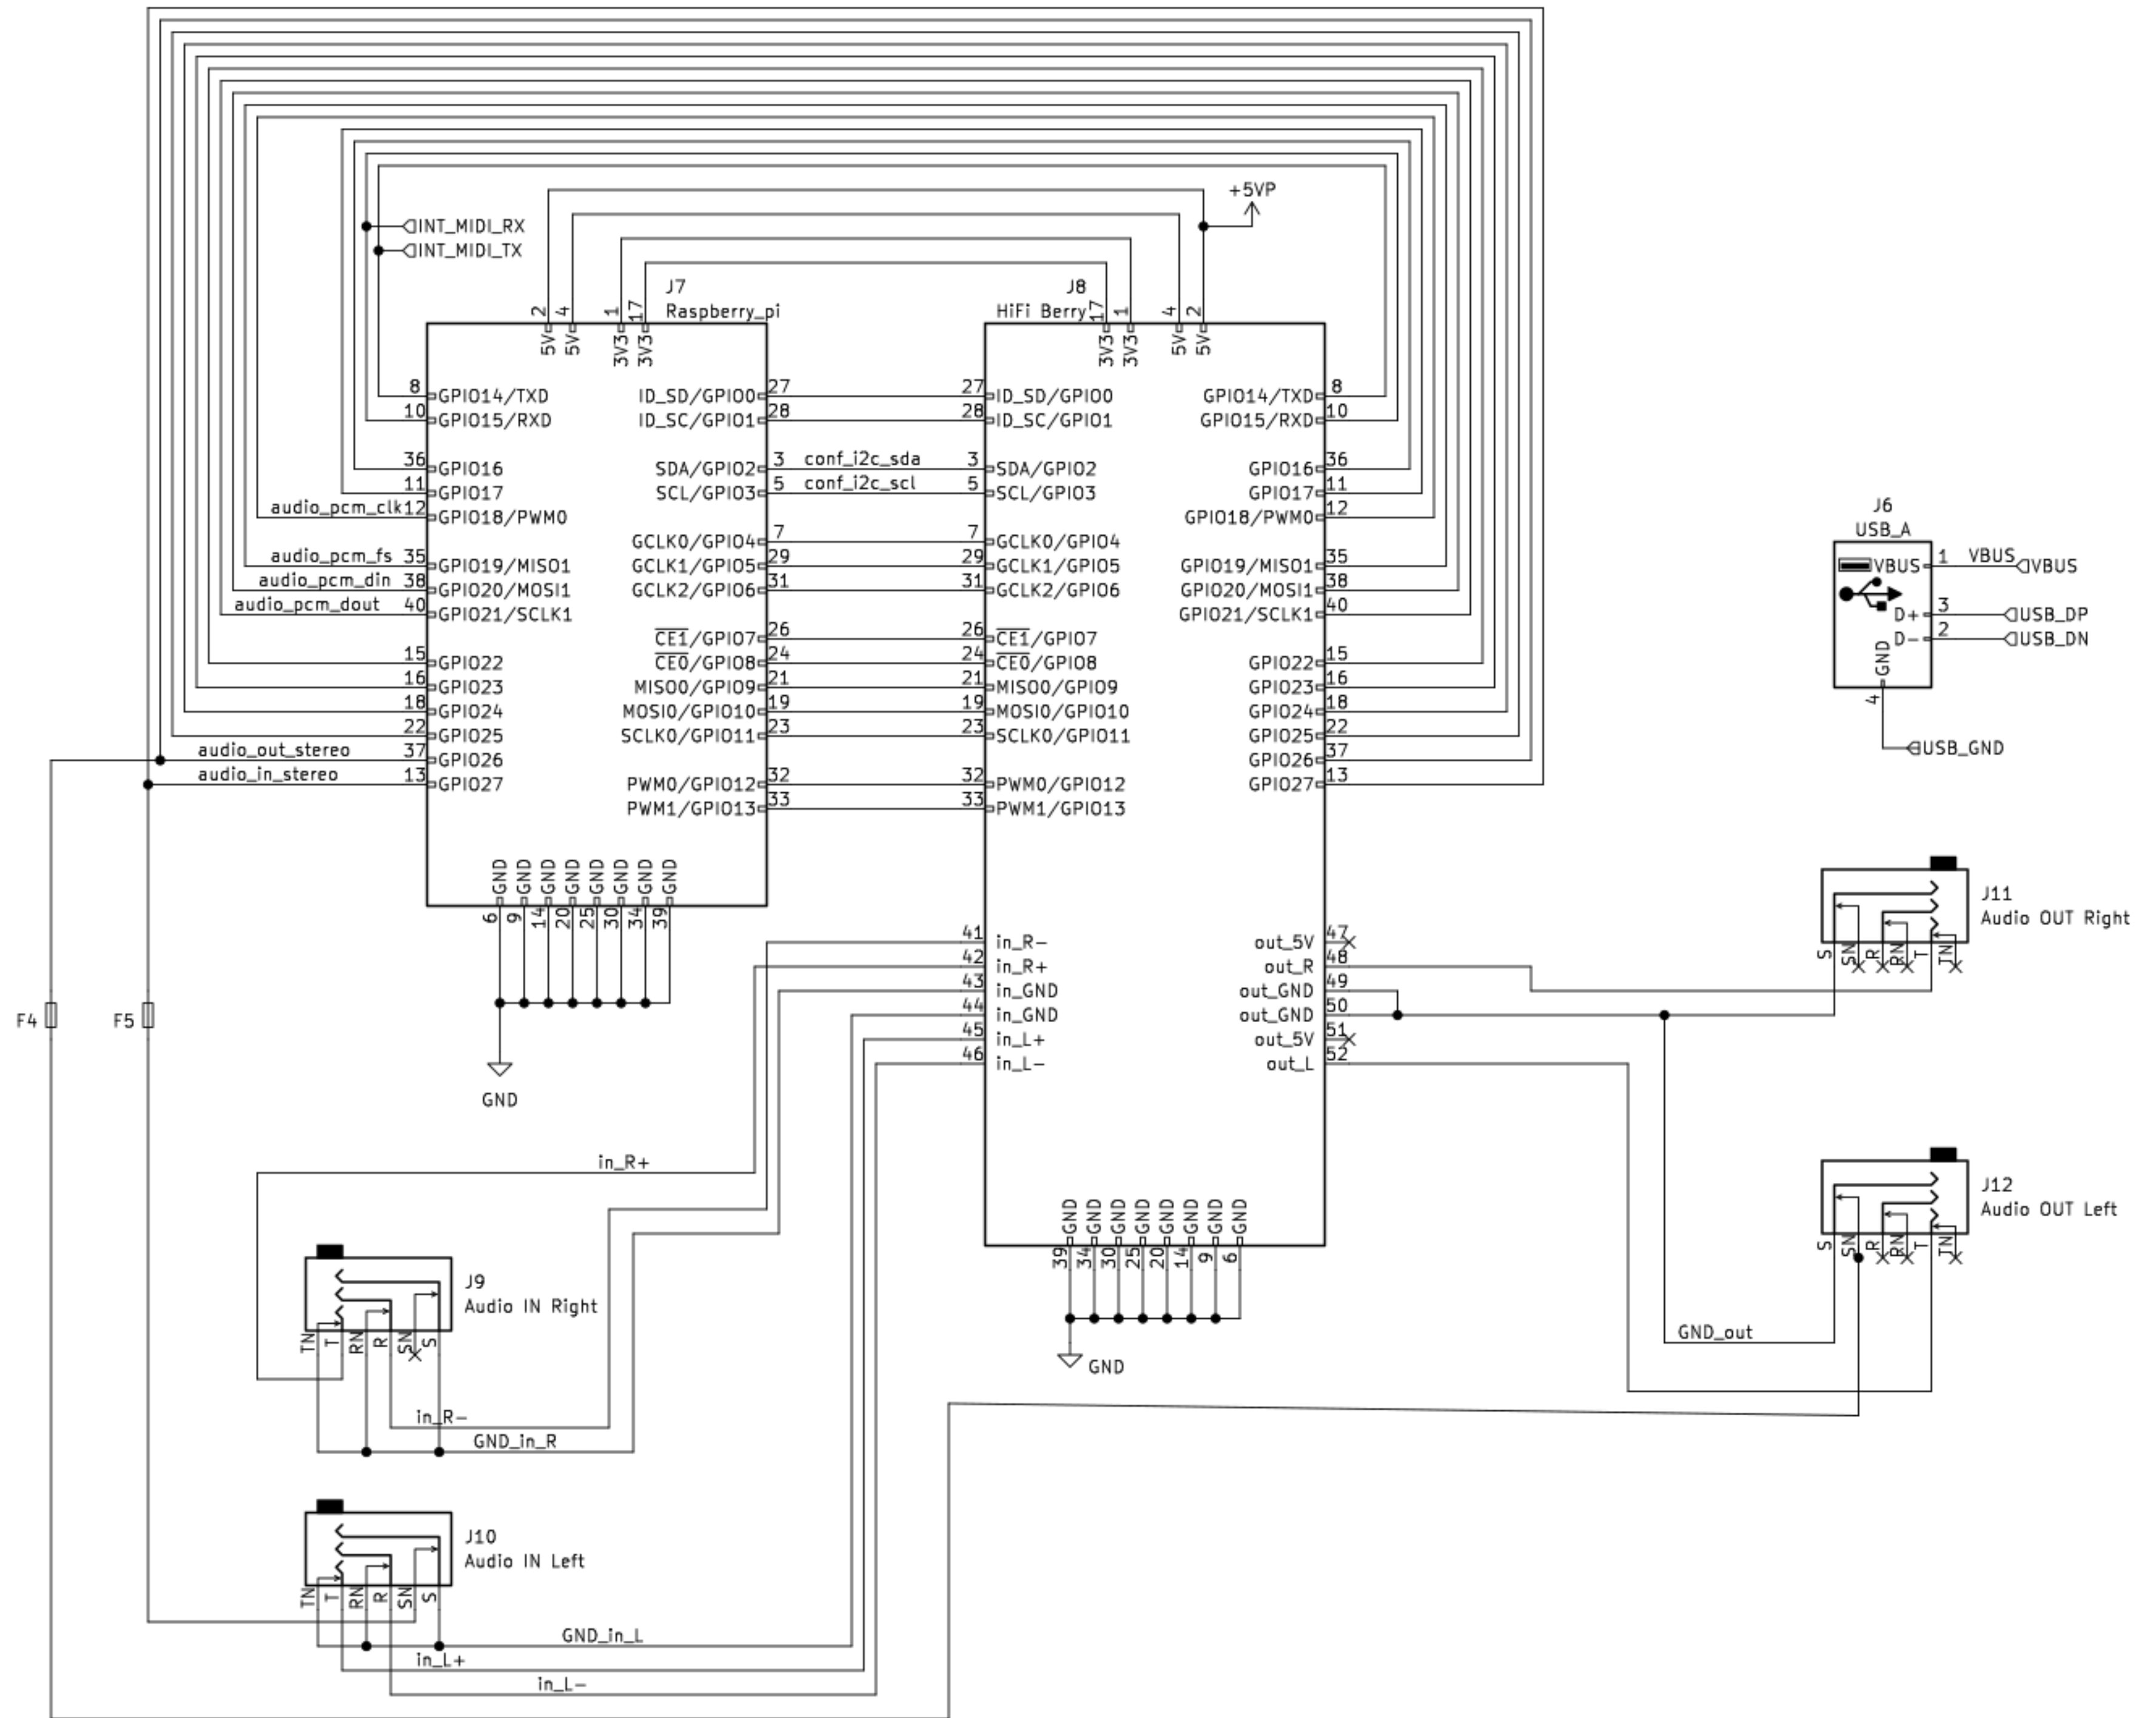




/LEDs

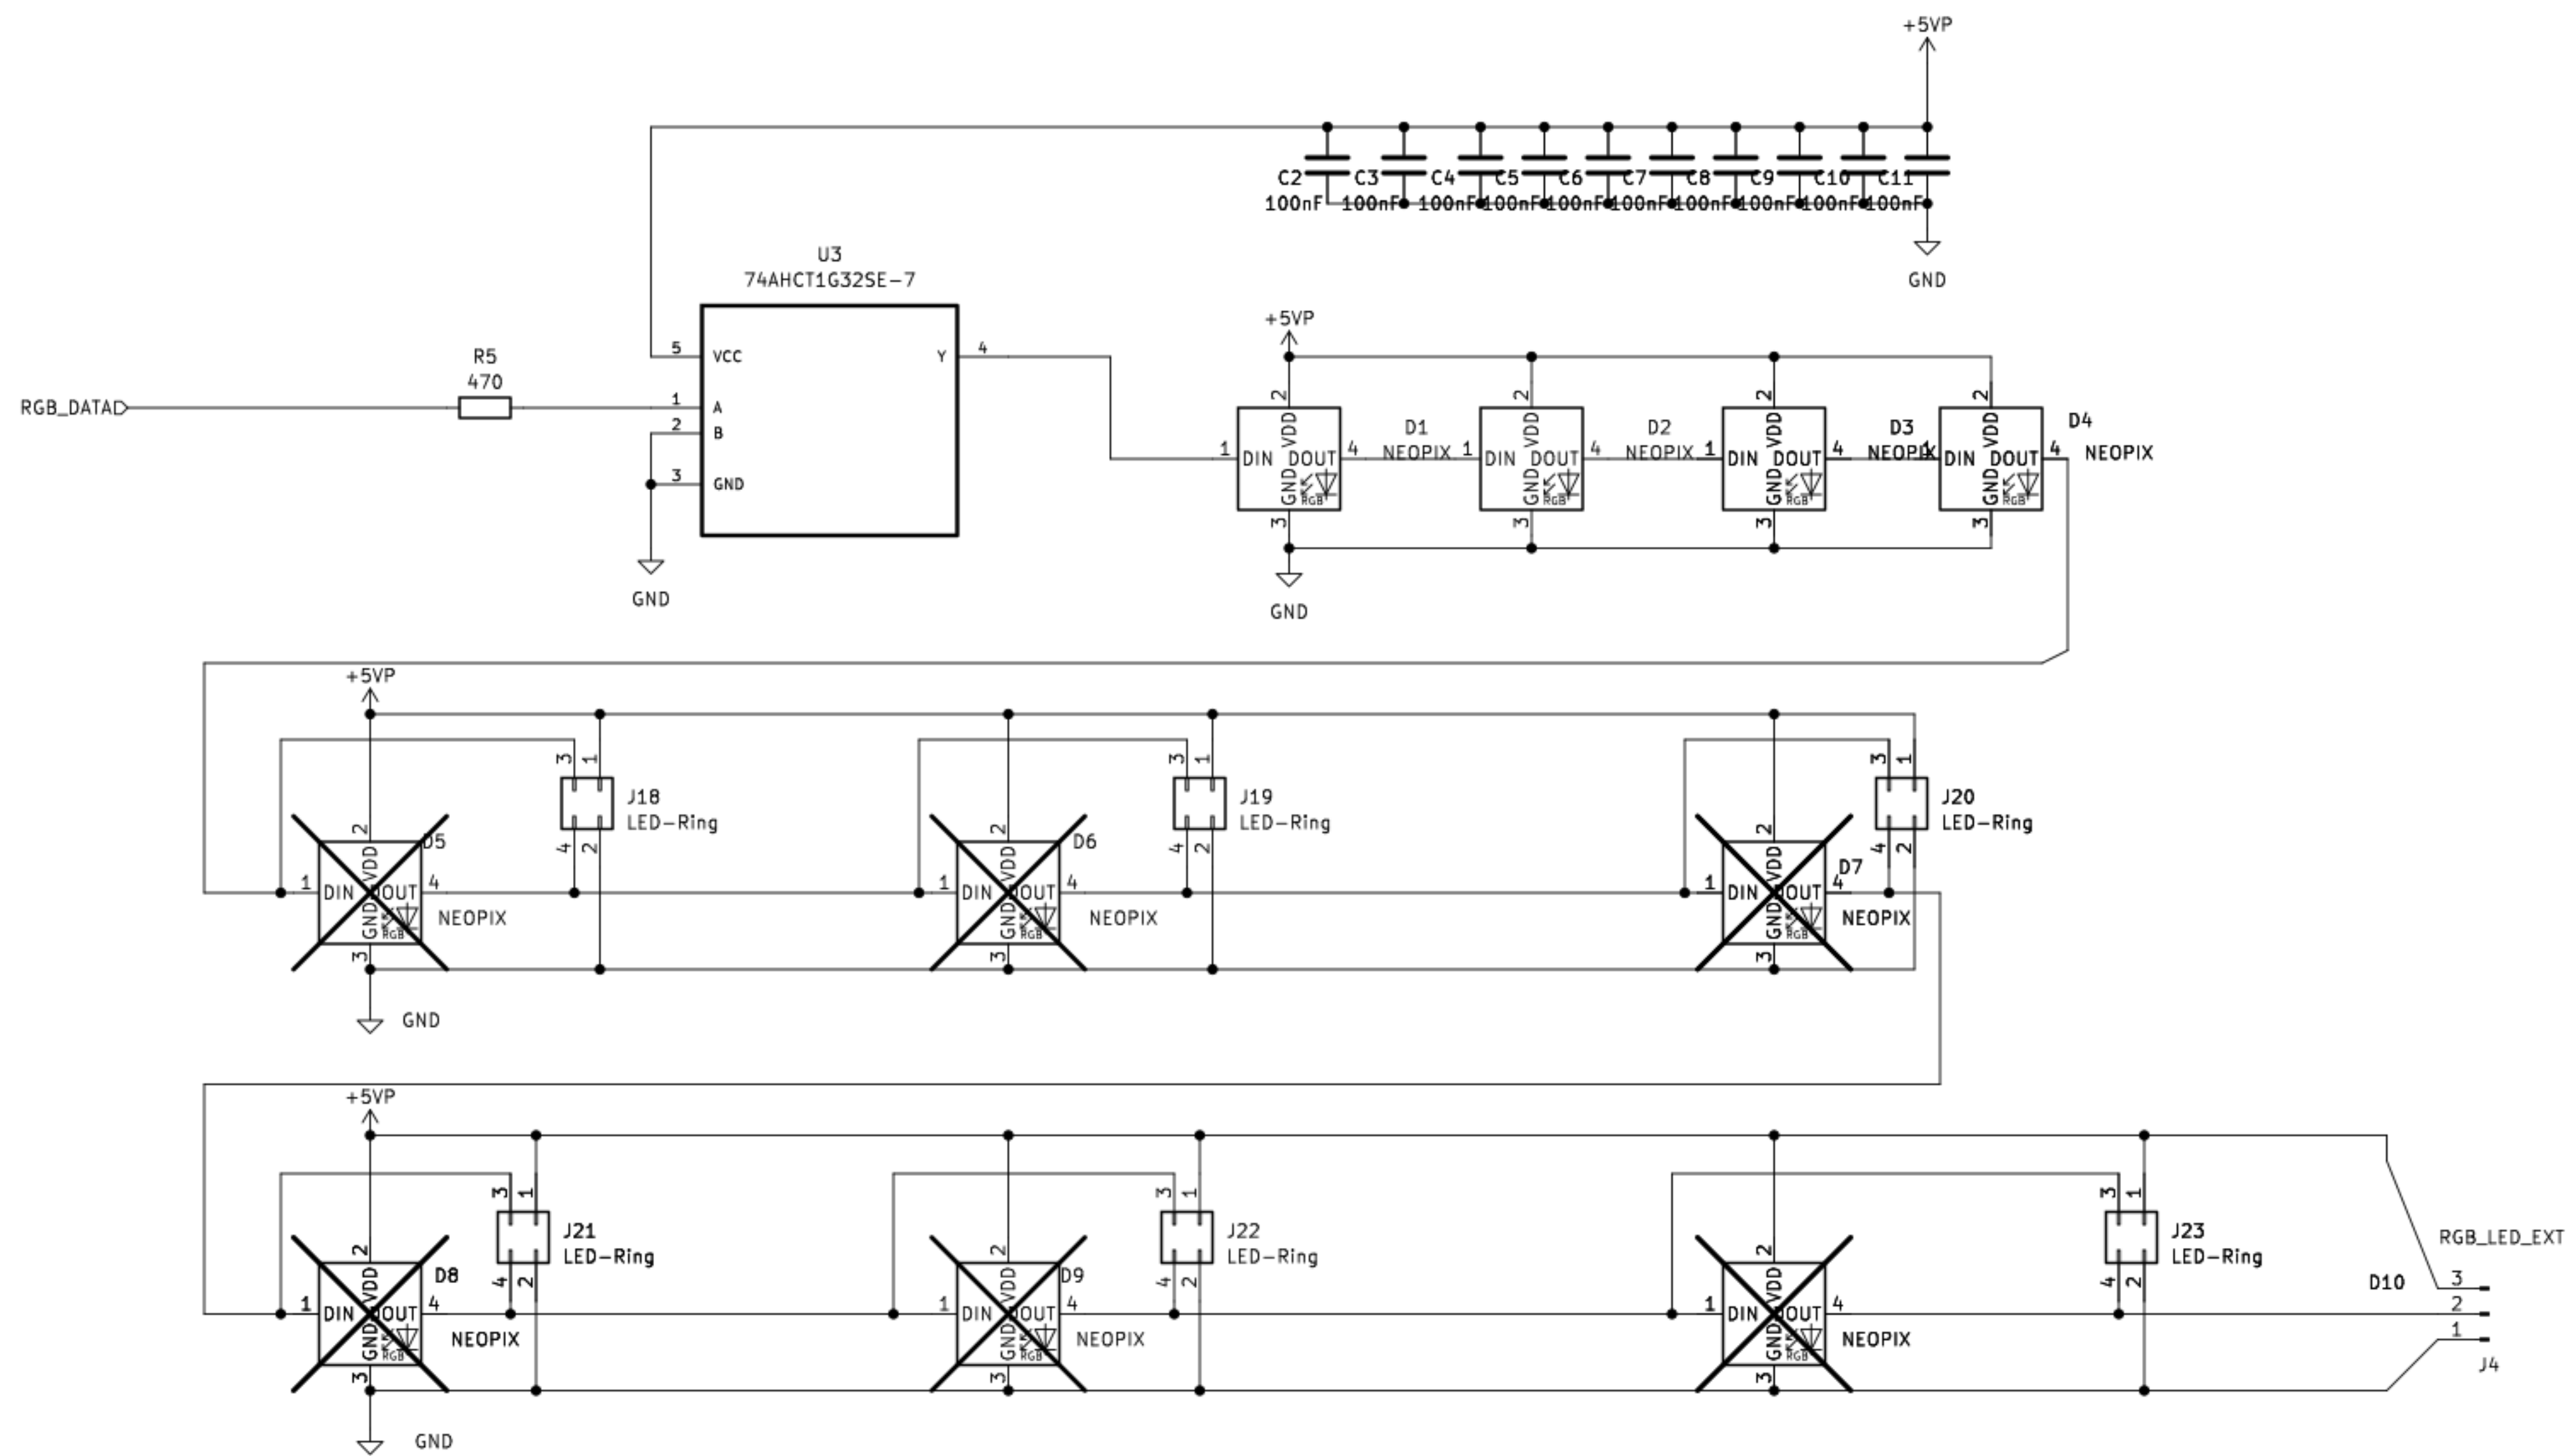


Either the single LEDs or the LED rings can be populated.

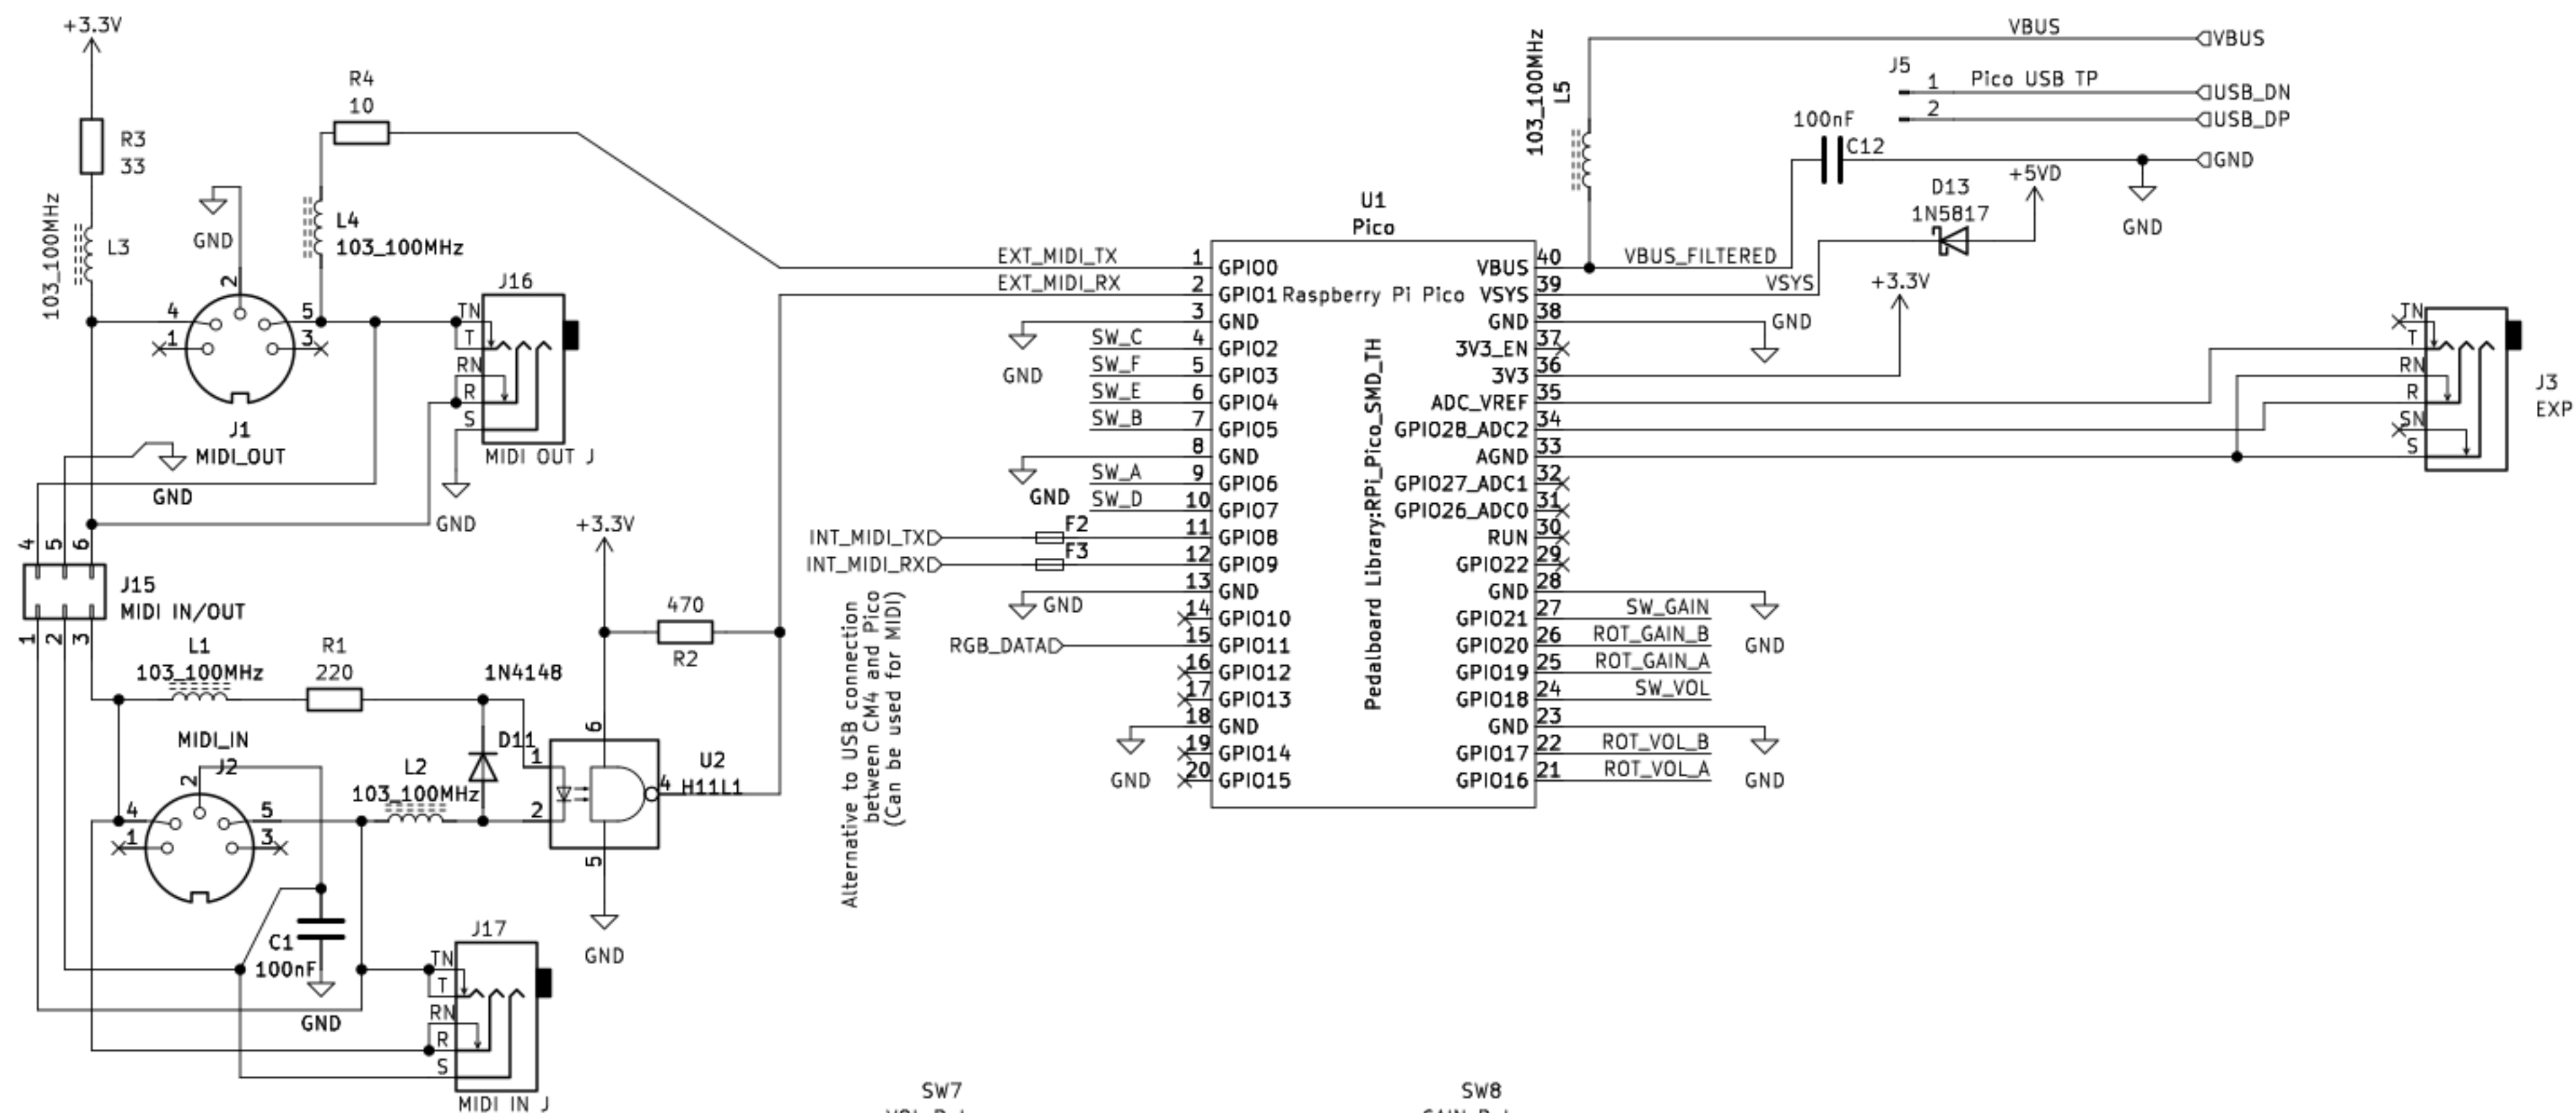

Alternative to USB connection
between CM4 and Pico
(Can be used for MIDI)

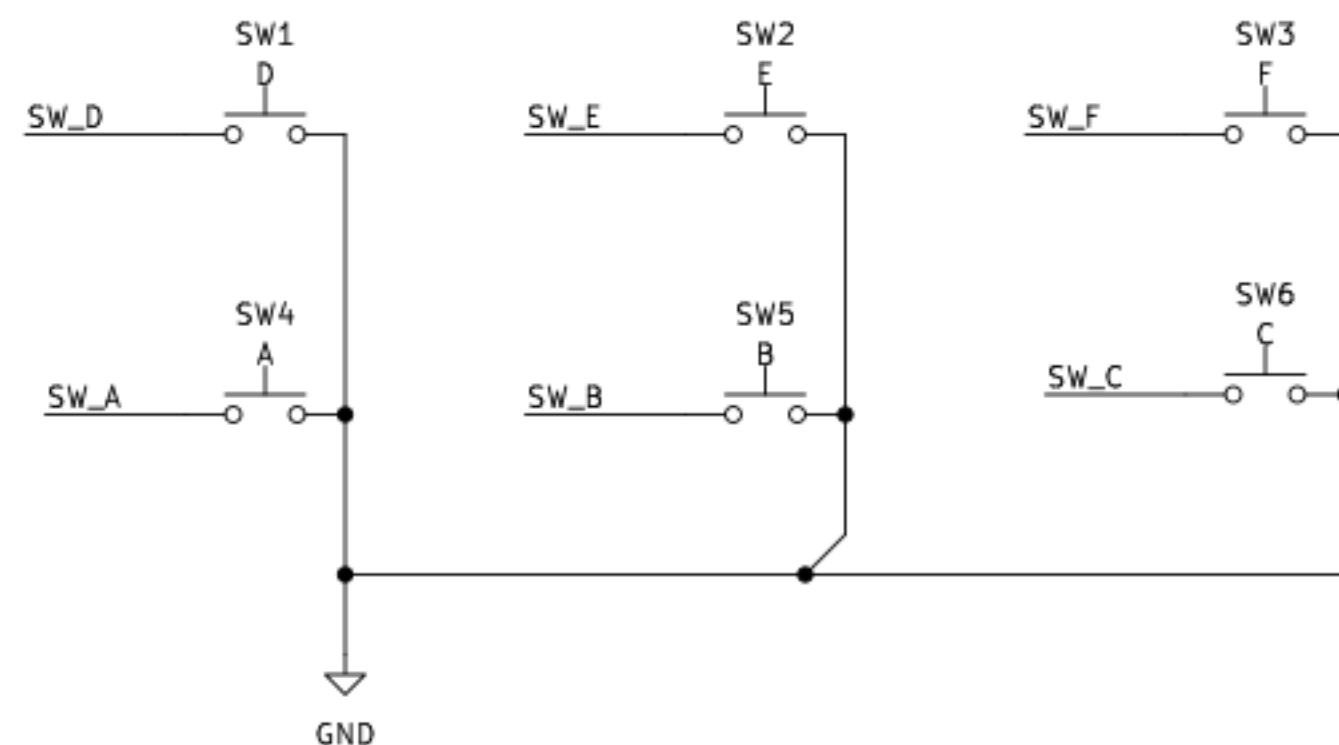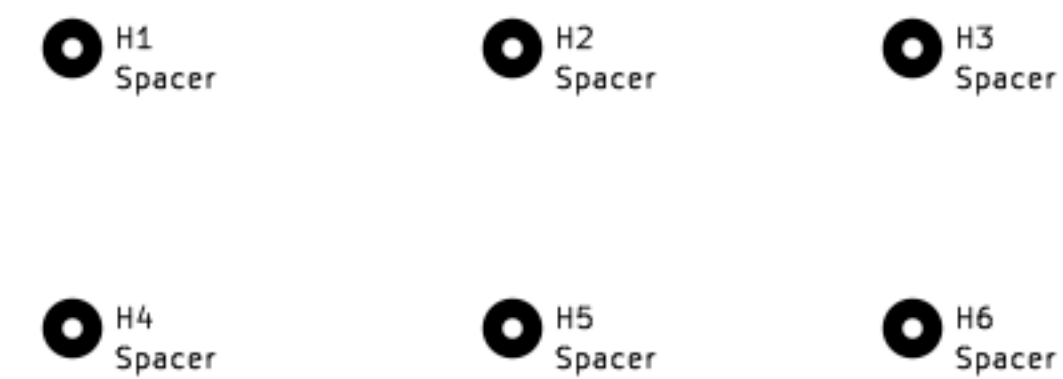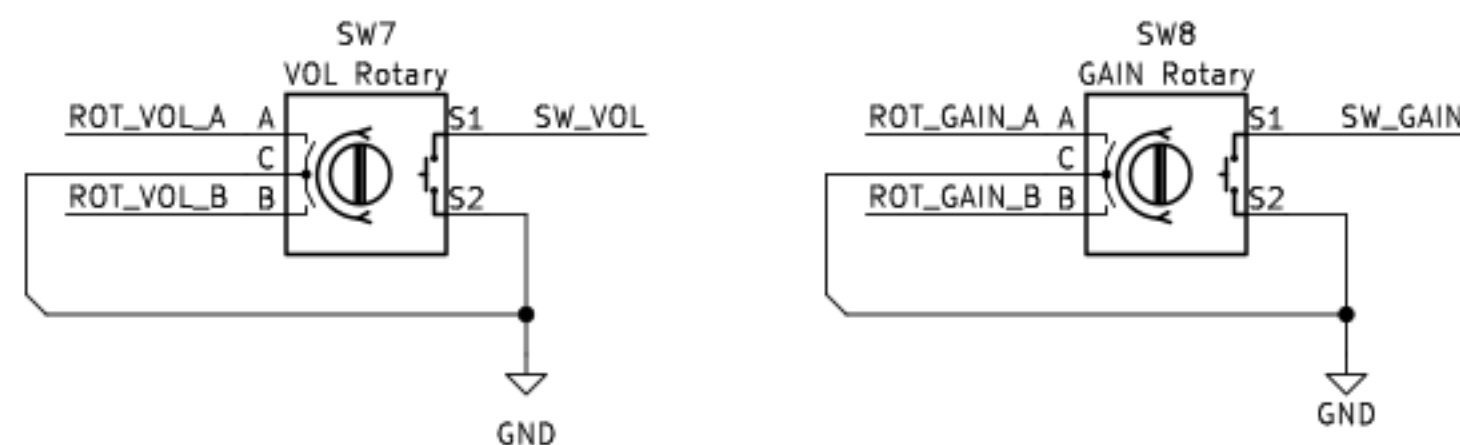


MIDI Bites allow to remove some of the board material that is used to hold the DIN5 or 3.5mm Jack connectors and instead mount the connectors to the case and wire them up with J15



/Power Supply

5.5mm x 2.1mm, Center Negative.

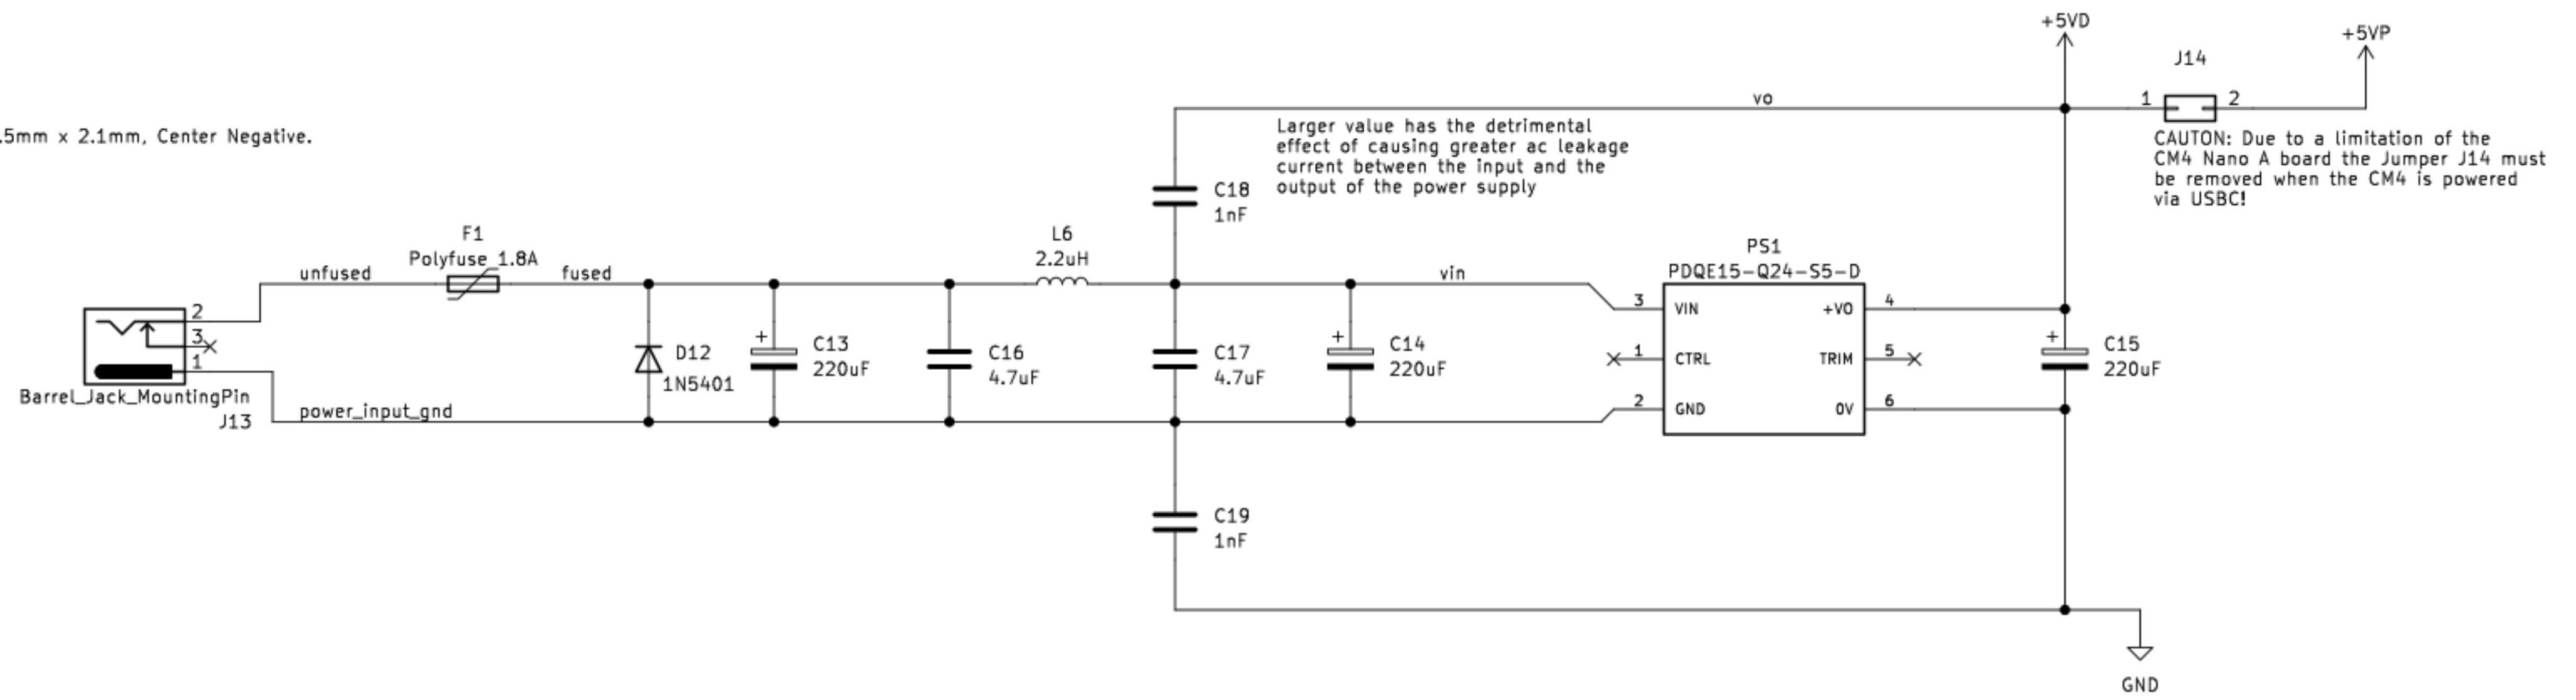

EMC filter: <https://www.cui.com/blog/emi-filter-components-what-they-are-and-how-they-work>
CM Noixe: <https://www.cui.com/blog/reducing-supply-rail-common-mode-noise-in-audio-applications>