


## SFR™ and SFR-X™

### 3-Phase Voltage Regulator

[siemens-energy.com](https://www.siemens-energy.com)

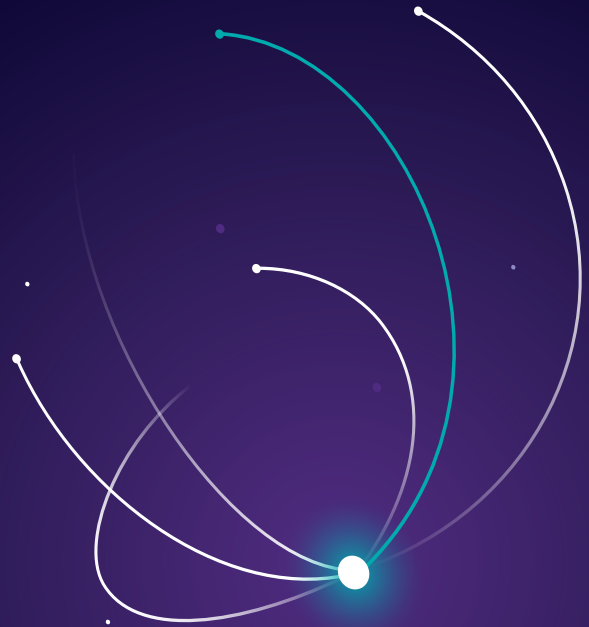

As a vertically integrated manufacturer of 3-phase regulators, Siemens Energy offers distinct advantages. All of our 3-phase regulators are engineered and manufactured in-house.

Our expertise in both technology and service gives us an additional advantage in the custom engineering necessary for most 3-phase regulator applications. The SFR voltage regulator has proven its reliability and durability in the toughest environments. Unit construction, tough exterior coating and side inspection door are just a few of the time-tested features of today's SFR.

In addition, Siemens Energy offers the popular SFR-X which features a separate tap-changing mechanism compartment, allowing for easy inspection and maintenance. Separating the

regulator tap-changer significantly increases the life of the regulator by eliminating arcing in the main tank containing the coil and core.

#### SFR modifications

- Magnetic temperature indicator
- Pressure relief device
- Lightning arrester brackets
- Magnetic type liquid level indicator
- Pressure/vacuum gauge
- Special bushings
- MR tap changer
- Separate tap changer compartment (available with SFR-X and SFR-MR)
- Customized controls
- Special CT/PT

| Catalog Number | Nominal Voltage | Rated KVA | Line Amps | OA/FA |
|----------------|-----------------|-----------|-----------|-------|
| 40-13.2-0500   | 13200           | 500       | 219       | OA    |
| 40-13.2-0750   | 13200           | 750       | 328       | OA    |
| 40-13.2-1000   | 13200           | 1000      | 437       | OA    |
| 40-13.2-1500   | 13200           | 1500      | 656       | OA    |
| 40-13.2-2000   | 13200           | 2000      | 874       | OA    |
| 40-13.2-2500   | 13200           | 2500      | 1093      | OA    |
| 40-13.2-2972   | 13200           | 2972      | 1300      | OA    |
| 41-13.2-0625   | 13200           | 625       | 274       | FA    |
| 41-13.2-0937   | 13200           | 937       | 410       | FA    |
| 41-13.2-1250   | 13200           | 1250      | 546       | FA    |
| 41-13.2-2000   | 13200           | 2000      | 874       | FA    |
| 41-13.2-2667   | 13200           | 2667      | 1166      | FA    |
| 41-13.2-3333   | 13200           | 3333      | 1458      | FA    |
| 41-13.2-4000   | 13200           | 4000      | 1750      | FA    |
| 40-34.5-0500   | 34500           | 500       | 84        | OA    |
| 40-34.5-1000   | 34500           | 1000      | 167       | OA    |
| 40-34.5-1500   | 34500           | 1500      | 251       | OA    |
| 40-34.5-2000   | 34500           | 2000      | 335       | OA    |
| 41-34.5-0625   | 34500           | 625       | 105       | FA    |
| 41-34.5-1250   | 34500           | 1250      | 209       | FA    |
| 41-34.5-2000   | 34500           | 2000      | 335       | FA    |
| 41-34.5-2667   | 34500           | 2667      | 446       | FA    |

## Published by

Siemens Energy, Inc.  
444 Hwy 49 South  
Richland, MS 39218  
USA

For more information, please contact:  
Phone: 1-888-703-1175  
Email: JMT.energy@siemens-energy.com  
or contact us:  
support.energy@siemens-energy.com

© Siemens Energy, 2021

Siemens Energy is a trademark licensed by Siemens AG.

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract. All product designations may be trademarks or product names of Siemens Energy Global GmbH & Co. KG or other companies whose use by third parties for their own purposes could violate the rights of the owners.