ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	ADDED ILL. 13 LIFTING LUGS [illegible] 1.38 DIA. REVISED A-A ARROWS [illegible] ECN [illegible]	7/8/03	[illegible]
	B	REVISED ILL. 3 & 4 [illegible]	[illegible]	[illegible]
	C	ADDED 14.25 DIMENSION ECN [illegible]	12/16/03	[illegible]
	D	CHG'D HEADER TO [illegible]	[illegible]	[illegible]
	E	[illegible]	[illegible]	[illegible]
	F	ADDED 6/6 STROKE ECN [illegible]	[illegible]	[illegible]
	G	REVISED ITEM [illegible]	[illegible]	[illegible]

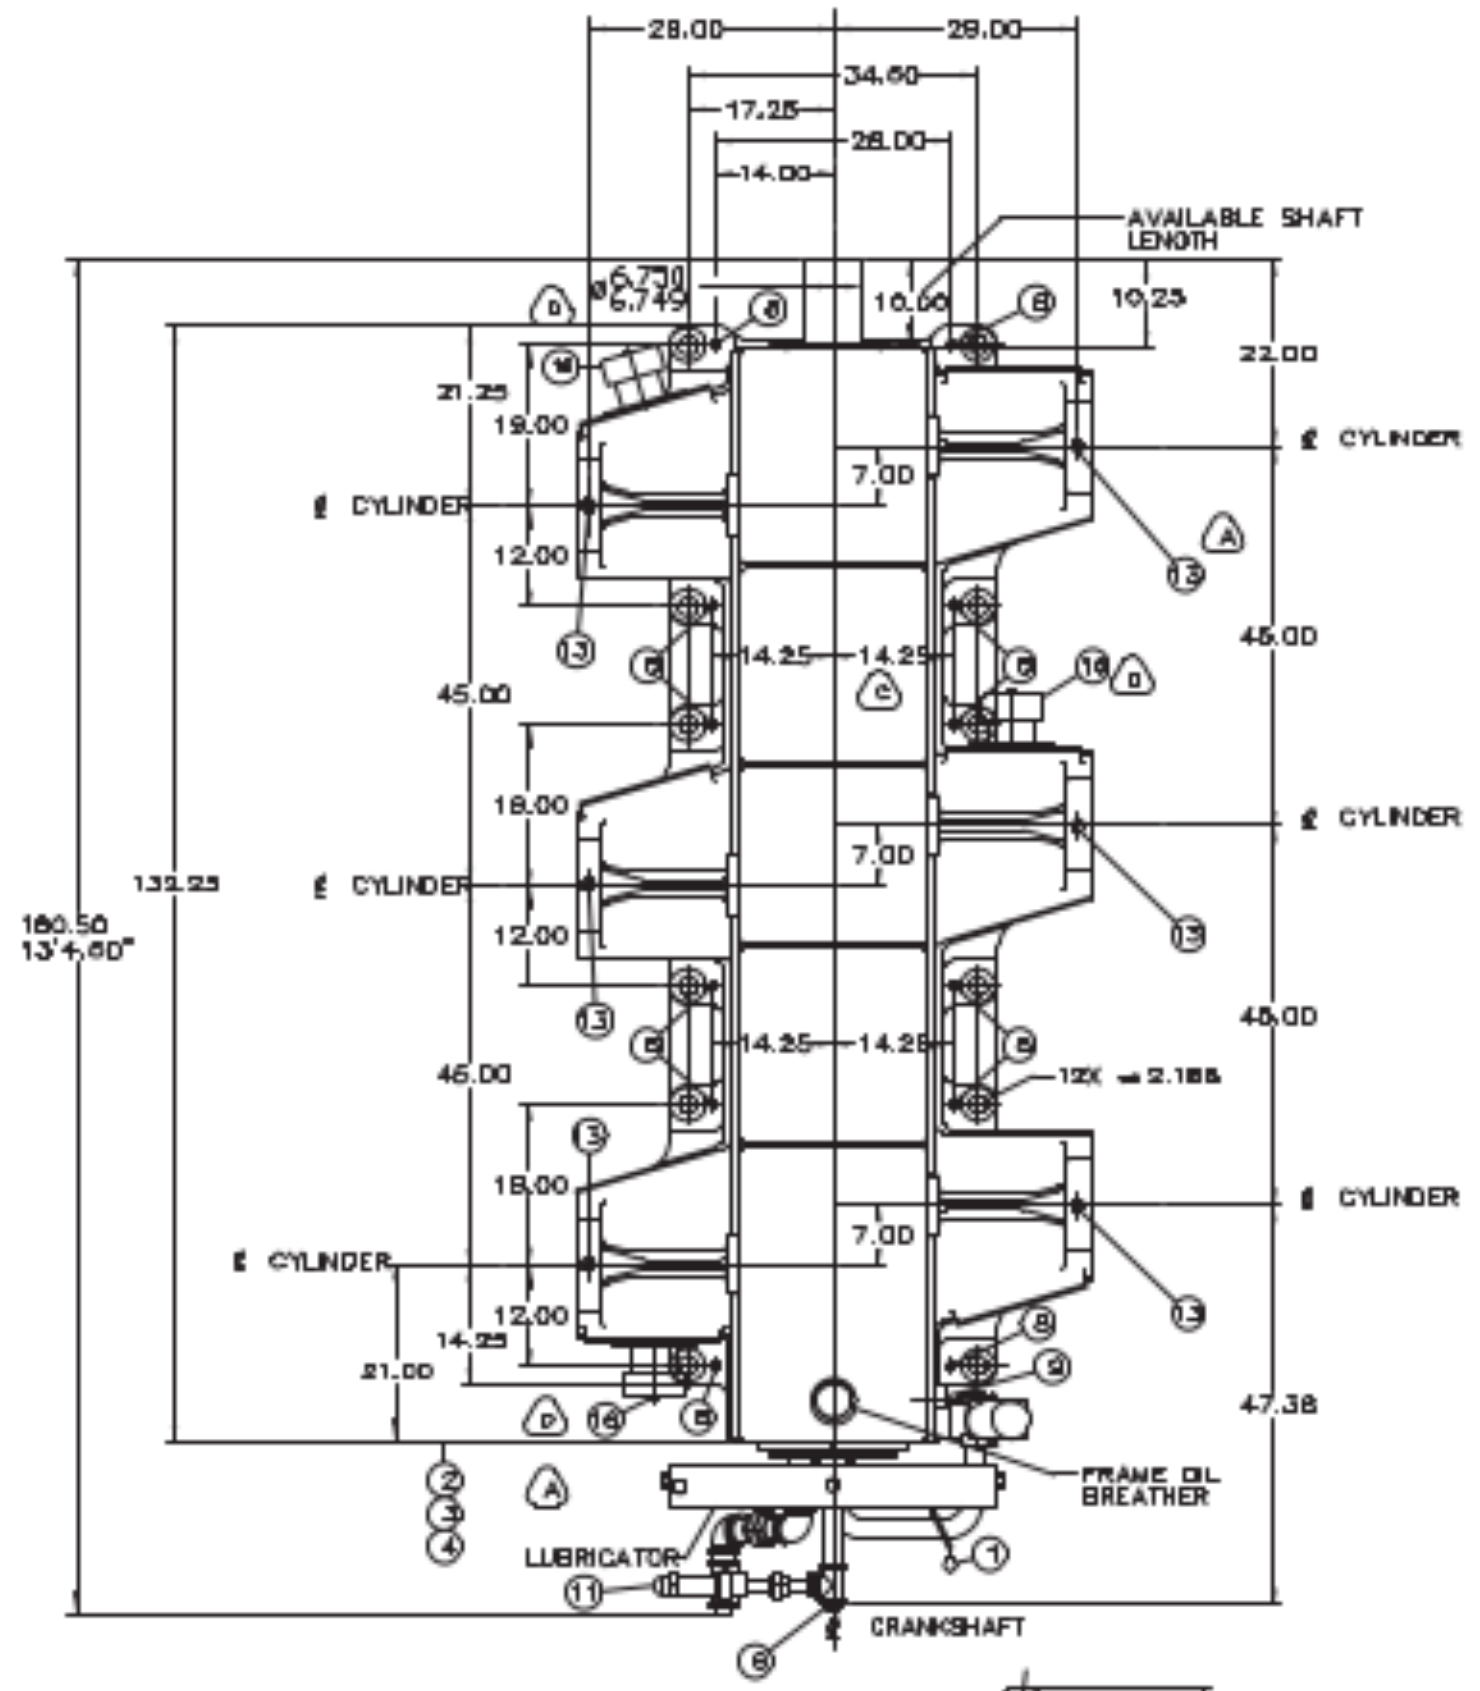



VIEW A—A
DRIVE END VIEW

(THESE CONNECTIONS ARE ONLY USED ON DRY SUMP FRAMES)

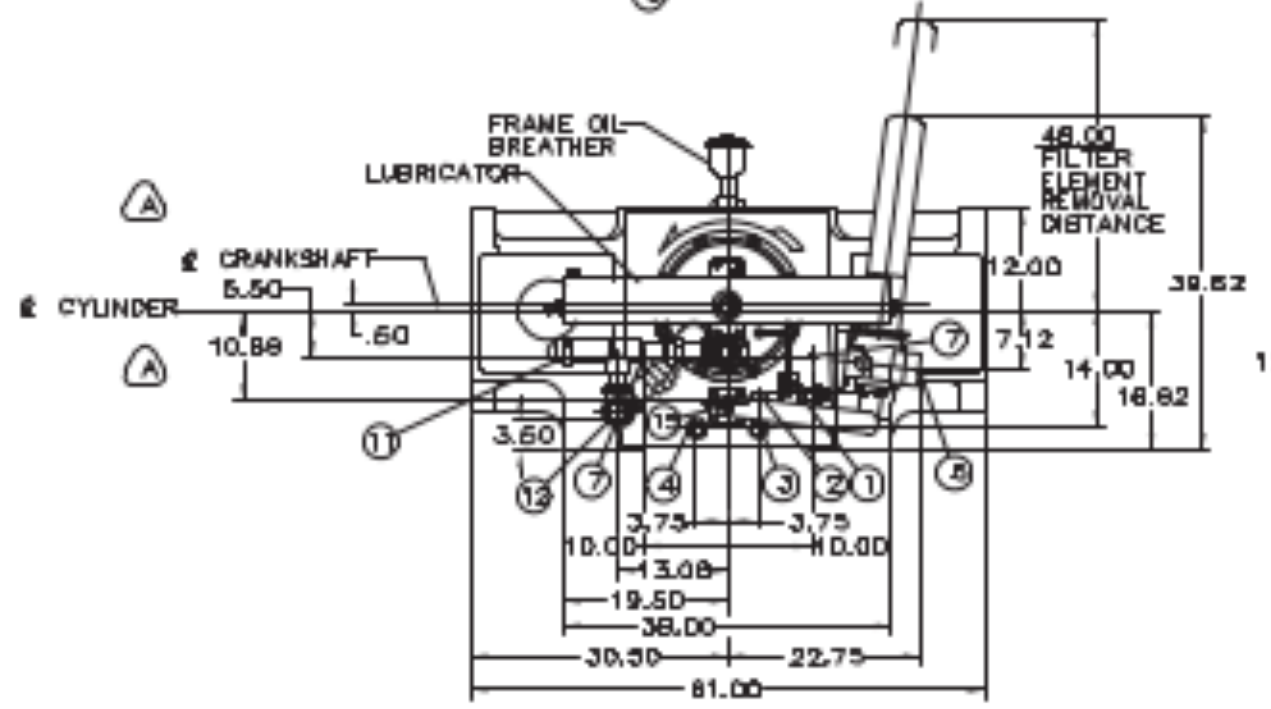

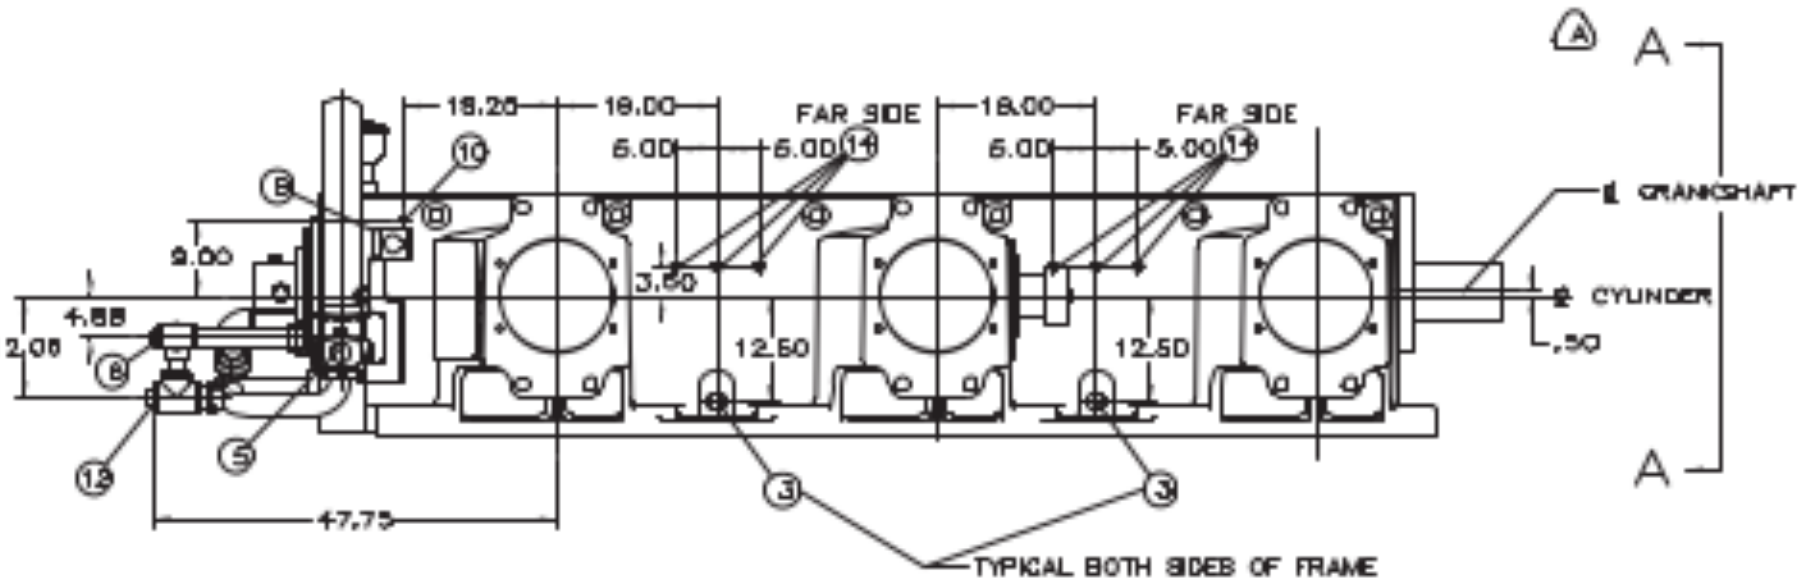

(THESE CONNECTIONS ARE ONLY USED ON DRY SUMP FRAMES)

- Ⓖ ① HAND OIL PUMP (IF REQUIRED)
- ② FRAME OIL LEVEL INDICATOR
- ③ 2.000 NPT FRAME OIL DRAIN (PLUGGED)
- ④ 2.000 NPT FRAME OIL HEATER (PLUGGED)
- Ⓖ ⑤ FRAME OIL INLET FROM COOLER OR ELECTRIC DRIVEN PRE-LUBE PUMP; 2" NPT (D-R CO. TO FURNISH)
- ⑥ 2.00" NPT FRAME OIL OUTLET TO COOLER. (PLUGGED)
- ⑦ .500 NPT-2 HOLES (PLUGGED)
- ⑧ LEVELING SCREWS .875-9 UNC-2B
- ⑨ DIFFERENTIAL PRESSURE INDICATOR (D-R CO.TO FURNISH)
- ⑩ OIL LEVEL CONTROL VENT .38 NPT (PLUGGED)
- ⑪ RELIEF VALVE – FACTORY SET AT 60 PSIG
- ⑫ 2.500 NPT EXTERNAL OIL INLET (PLUGGED) (ONLY USED ON DRY SUMP APPLICATIONS)
- Ⓐ ⑬ 1.500-8UNC-2B 2.25 FULL THD. LIFTING LUG (1 PER THROW)
- ⑭ .500 NPT RTD – 6 HOLES (IF REQUIRED)
- ⑮ .750 NPT AUX. CONNECTION – PLUGGED
- ⑱ BICERA DOOR – IF REQUIRED BY CLIENT

TOTAL WEIGHT: APPROX. 15,400 LBS

CHG TO: 71C 14RC				
THIRD ANGLE PROJECTION	[redacted]			
DRAWN R. KELLEY	DATE [illegible]	BASE [illegible]	STROKE 6/6/7	TYPE HOS/D-NF
CHECKED G. TAS	DATE [illegible]	NAME OF PART OUTLINE – FRAME (6 THROW)		
APPROVED G. TAS	DATE [illegible]	SIZE E	FEDERAL SUPPLY CODE	DRAWING NO. AAZD6008	REV. G
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		SCALE [illegible]	WT. [illegible] LBS	SHEET 1 OF 1

AAZD6008 G 1