

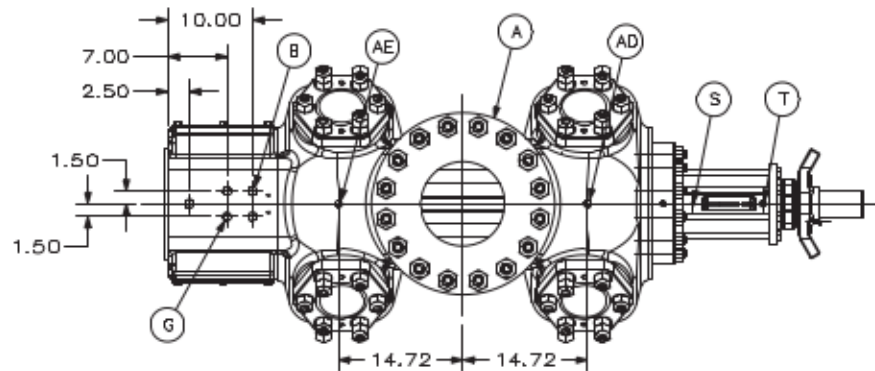


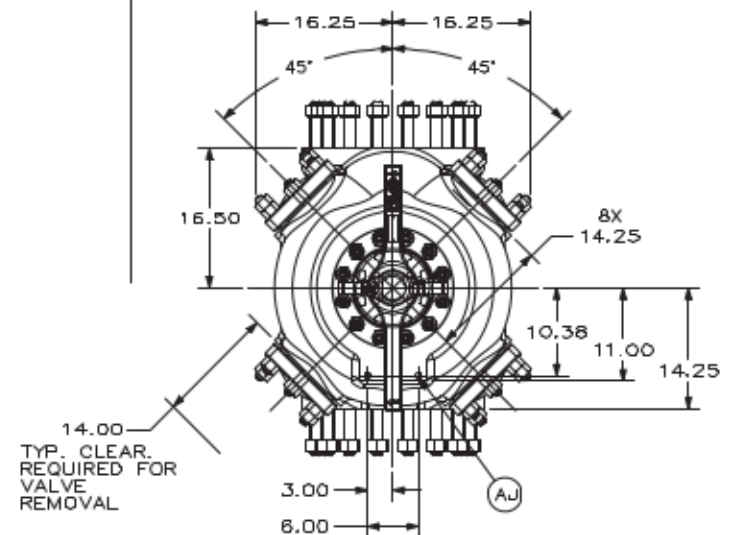


- REVISIONS
- | ZONE | REV | DESCRIPTION | DATE | APPROVED |
|------|-----|--|------|------------|
| A) | | 10.00"-900# FF FLANGE CONN-INLET/TOP & DISCH./BOTTOM | | |
| | | 16-1.375-BUN-3A STUDS ON Ø18.500 B.C.-Ø21.50 FLANGE | | |
| B) | | .25 NPT --- PACKING LUBE CONN | | TOP |
| C) | | .25 NPT --- PACKING VENT/RAIN CONN | | BOTTOM |
| D) | | .75 NPT --- YOKE DRAIN/PURGE CONN (IF REQUIRED) | | BOTTOM |
| E) | | .25 NPT --- CYL BORE LUBE CONN | | TOP |
| G) | | .75 NPT --- YOKE VENT CONN | | TOP |
| S) | | .125 NPT --- VVCP ROD PKG VENT TO NON-HAZ AREA | | TOP |
| T) | | .125 NPT --- GREASE FITTING | | TOP |
| AD) | | .50 NPT --- OUTER END INDICATOR CONN | | TOP |
| AE) | | .50 NPT --- FRAME END INDICATOR CONN | | TOP |
| AJ) | | .750-10UNC-3B THD, CYLINDER SUPPORT | | BOTTOM END |
| AP) | | .625-11UNC-3B YOKE SUPPORT | | BOTTOM |
| BB) | | .75 NPT --- RTD CONN. (IF REQUIRED)(MAX. INSERTION DEPTH-14.25") | | |

59.74 FOR 5" STROKE
 59.24 FOR 6" STROKE
 58.74 FOR 7" STROKE
 REQUIRED FOR REMOVAL
 OF PISTON & ROD
 (NOT TO SCALE)

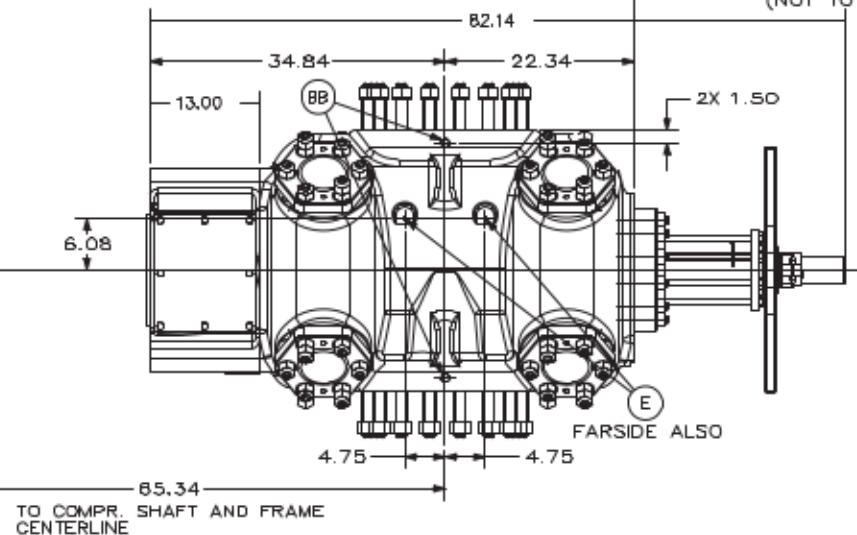

TOTAL WEIGHT: APPROX 5350 LBS.

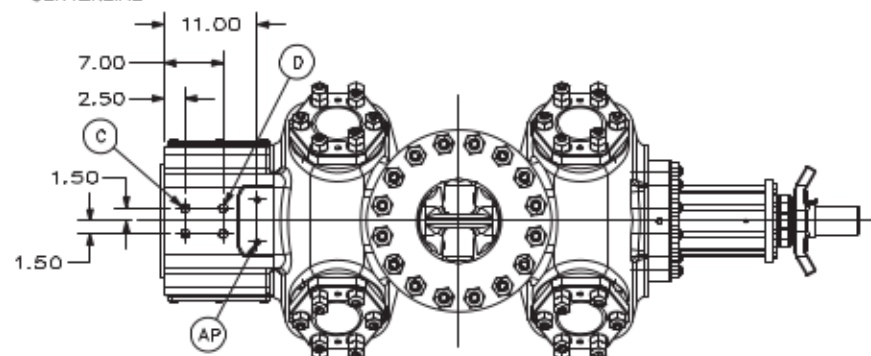

CHG TO: 72 124 149

THIRD ANGLE PROJECTION		SIZE	STROKE	TYPE
DRAWN K.DAVISON		8.50-10.50	5.0/6.0/7.0	HOS
CHECKED B.BENNETT		NAME OF PART		
APPROVED B.BENNETT		OUTLINE - HP/PIPELINE CYLINDER		
SIZE	FEDERAL SUPPLY CODE	DWG NO.	REV.	
C		HHH00851	00	
SCALE 3/32		WT. ABOVE	SHEET 1 OF 1	

DWG NO. HHH00851 SH 1

DATE: 20 MAY 10