


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

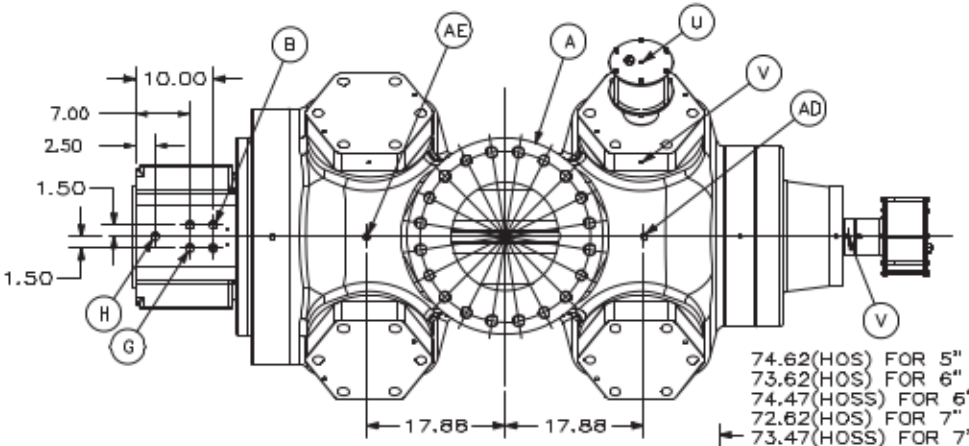


A) 14.00"–900# FF FLANGE CONN–INLET/TOP AND DISCHARGE/BOTTOM 20X–1.500 STUDS ON ø22.000 B.C. ø25.25 FLANGE
B) .25 NPT PACKING LUBE CONN ---------- TOP
C) .25 NPT PACKING VENT/DRAIN CONN ---------- BOTTOM
D) .75 NPT YOKE DRAIN/PURGE CONN ---------- BOTTOM
E) .25 NPT CYLINDER LUBE CONN (4X)---------- TOP
G) .75 NPT YOKE VENT CONN ---------- TOP
H) .38 NPT PACKING COOLANT OUT CONN (IF REQUIRED) TOP
J) .38 NPT PACKING COOLANT IN CONN (IF REQUIRED)– BOTTOM
U) .25 NPT UNLOADER AIR CONN
V) .25 NPT UNLOADER VENT TO NON–HAZARDOUS AREA –– TOP
AD) .50 NPT OUTER END INDICATOR CONN ---------- TOP
AE) .50 NPT FRAME END INDICATOR CONN ---------- TOP
AJ) .750–10UNC–3B THD CYL. SUPPORT ---------- BOTTOM SIDE
AP) .625–11UNC–3B THD YOKE SUPPORT ---------- BOTTOM
BB) .75 NPT RTD CONN. (IF REQUIRED) (MAX. INSERTION DEPTH–18.56") (MIN. INSERTION DEPTH–5.56")

74.62(HOS) FOR 5" STROKE
73.62(HOS) FOR 6" STROKE
74.47(HOSS) FOR 6" STROKE
72.62(HOS) FOR 7" STROKE
73.47(HOSS) FOR 7" STROKE
REQUIRED FOR REMOVAL OF PISTON & ROD
(NOT TO SCALE)

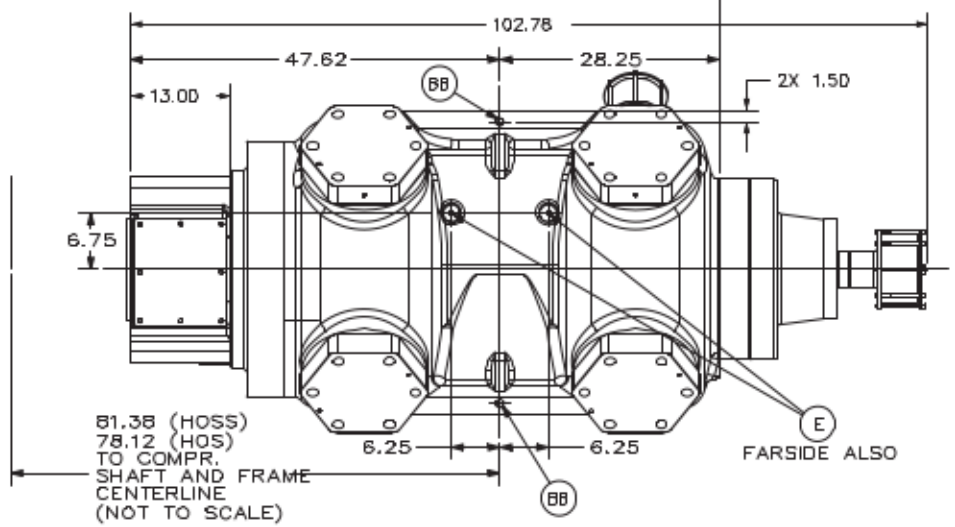

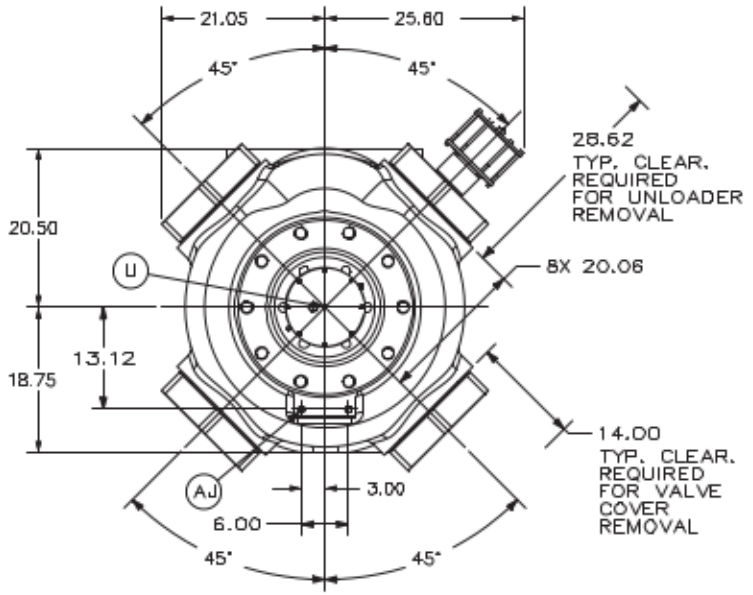

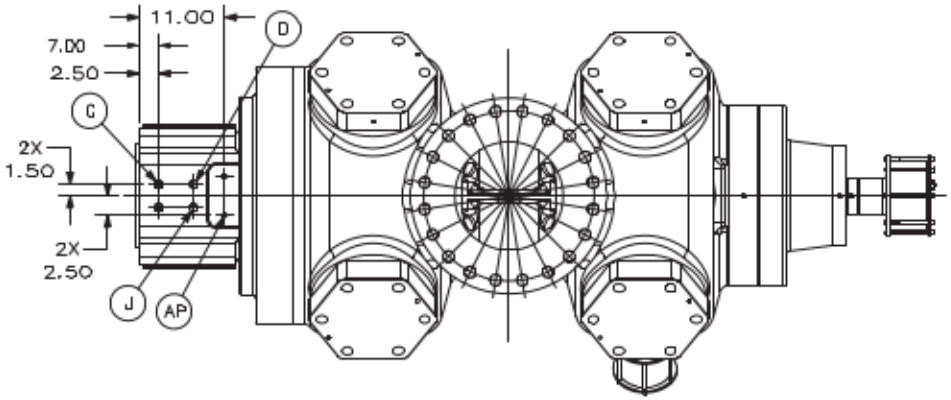

TOTAL WEIGHT: APPROX 12025 LBS.

CHG TO: 149

THIRD ANGLE PROJECTION

DRAWN K.DAVISON	DATE 21MAR11	SIZE 14.00–16.50	STROKE 5.0/6.0/7.0	TYPE HOS/HOSS
CHECKED B. BENNITT	DATE 21MAR11	NAME OF PART OUTLINE – HP/PIPELINE CYLINDER		
APPROVED B. BENNITT	DATE 21MAR11	SIZE C	FEDERAL SUPPLY CODE	DWG NO. HHHO1471 REV. 00
VP PART		SCALE 1:12	WT. ABOVE	SHEET 1 OF 1

DWG NO HHHO1471 SH 1

FORM FLANGE-04.DGE