




REVISIONS			
ZONE	REV	DESCRIPTION	DATE

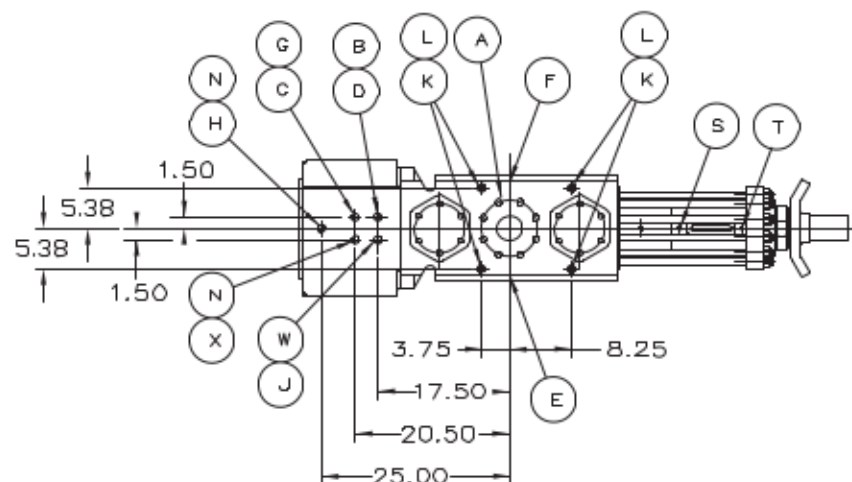

- A) 3.00-900# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM
8- .875 STUDS ON 7.500 DIA B.C. 9.50 FLANGE DIA.
- B) .25 NPT -- PACKING LUBE CONN ----- TOP
- C) .25 NPT -- PACKING VENT/DRAIN CONN ----- BOTTOM
- D) .75 NPT -- YOKE DRAIN CONN----- BOTTOM
- E) .25 NPT -- CYL BORE LUBE CONN ----- TOP
- F) .25 NPT -- CYL BORE LUBE CONN----- BOTTOM
- G) .75 NPT -- YOKE VENT/PURGE CONN. (IF REQUIRED)----- TOP
- H) .38 NPT -- PACKING COOLANT OUT CONN.(IF REQUIRED)- TOP
- J) .38 NPT -- PACKING COOLANT IN CONN. (IF REQUIRED)- BOTTOM
- K) .75 NPT -- CYL COOLANT INLET CONN (IF REQUIRED)---- BOTTOM
- L) .75 NPT -- CYL COOLANT DISCH CONN (IF REQUIRED)---- TOP
- N) .75 NPT -- SPARE CONN. ----- TOP OR BOT
- S) .125 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA----- TOP
- T) .125 NPT -- GREASE FITTING----- TOP
- W) .25 NPT -- SCRAPER PURGE CONN (IF REQUIRED)----- TOP
- X) .25 NPT -- PACKING PURGE CONN (IF REQUIRED)----- TOP
- AD) .50 NPT -- OUTER END INDICATOR CONN -----SIDE
- AE) .50 NPT -- FRAME END INDICATOR CONN -----SIDE
- AJ) .750-10UNC-2B THD, CYLINDER SUPPORT ----- BOTTOM SIDE
- AP) .625-11UNC-2B YOKE SUPPORT ----- BOTTOM
- BB) .75 NPT -- RTD CONN (IF REQUIRED)

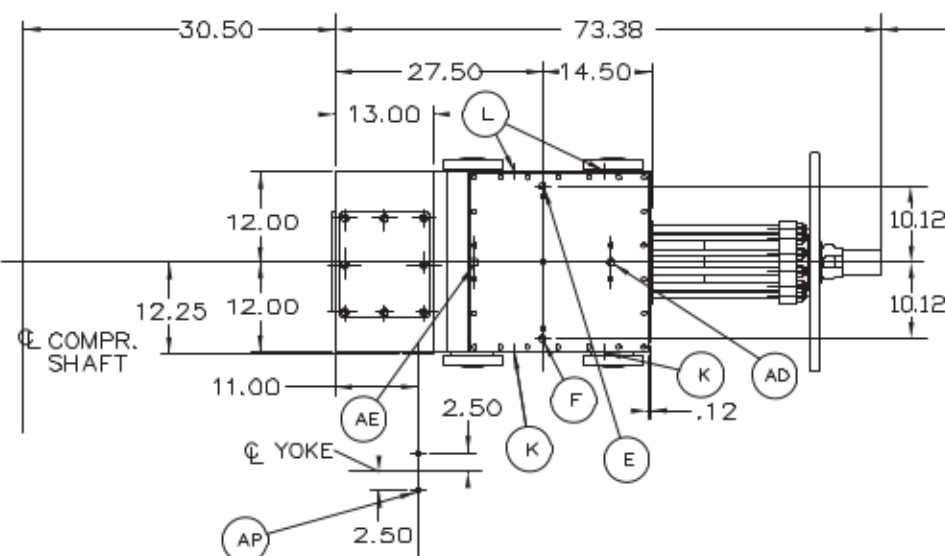

REQUIRED FOR
REMOVAL OF
PISTON & ROD

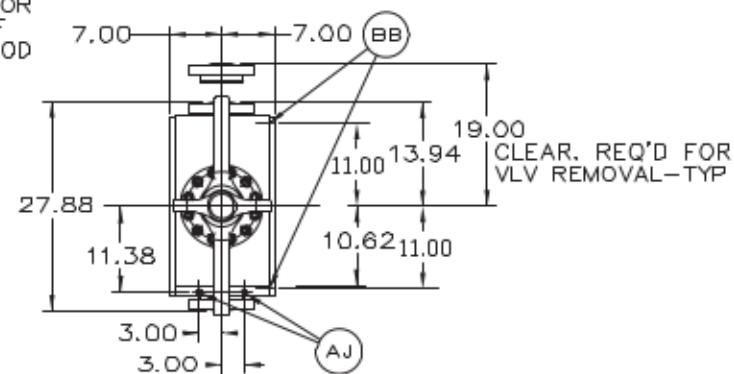

CLEAR. REQ'D FOR
VLV REMOVAL-TYP

TOTAL WEIGHT: APPROX. 2250 LBS

CHG TO: 72 124 149			
THIRD ANGLE PROJECTION	DATE 020CT08	SIZE 4.75	STROKE ALL
DRAWN K.DAVISON	DATE 020CT08	TYPE HOS	
CHECKED B.BENNETT	DATE 020CT08	NAME OF PART	
APPROVED B.BENNETT	DATE 020CT08	OUTLINE - 4.75 CYLINDER WC	
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES		SIZE C	FEDERAL SUPPLY CODE
		DRAWING NO. H1H00403	REV. -
		SCALE. 083:1	WT.
		SHEET 1 OF 1	