


4

3


2

1


REVISIONS			
ZONE	REV	DESCRIPTION	DATE
		APPROVED	

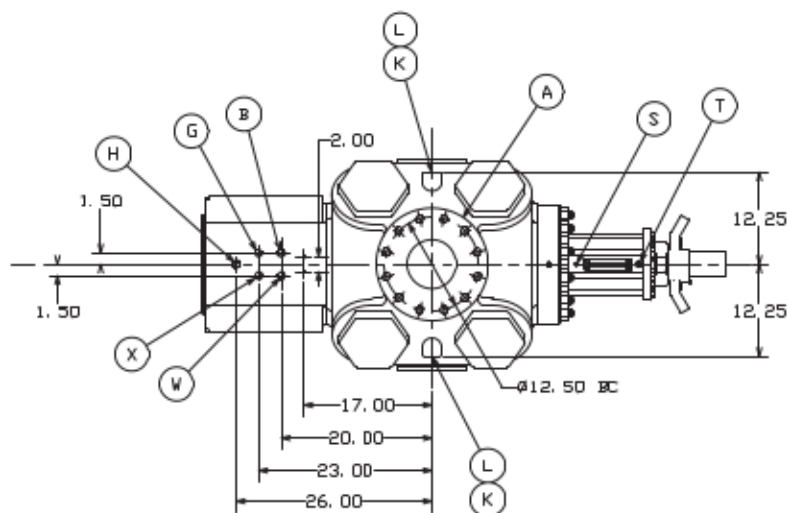

- A) 6.00"-900# FF FLANGE CONN-INLET/TOP & DISCH./BOTTOM
12-1.125-8UN-2A STUDS ON 12.500 DIA B.C. -15.00 FLG DIA
- B) .25 NPT -- PACKING LUBE CONN ----- TOP
- C) .25 NPT -- PACKING VENT/DRAIN CONN ----- BOTTOM
- D) .75 NPT -- YOKE DRAIN/PURGE CONN ----- BOTTOM
- E) .25 NPT -- CYL BORE LUBE CONN ----- TOP
- F) .25 NPT -- CYL BORE LUBE CONN ----- BOTTOM
- G) .75 NPT -- YOKE VENT CONN ----- TOP
- H) .38 NPT -- PACKING COOLANT OUT CONN ----- TOP
- J) .38 NPT -- PACKING COOLANT IN CONN ----- BOTTOM
- K) .75 NPT -- CYL COOLANT INLET CONN ----- BOTTOM
- L) .75 NPT -- CYL COOLANT DISCH CONN ----- TOP
- N) .75 NPT -- SPARE CONN ----- BOTTOM
- S) .125 NPT -- VVCP ROD PKG VENT TO NON-HAZ AREA ----- TOP
- T) .125 NPT -- GREASE FITTING ----- TOP
- W) .25 NPT -- SCRAPER PURGE CONN ----- TOP
- X) .25 NPT -- PACKING PURGE CONN ----- TOP
- AD) .50 NPT -- OUTER END INDICATOR CONN ----- BOTH SIDES
- AE) .50 NPT -- FRAME END INDICATOR CONN ----- BOTH SIDES
- AJ) .750-10UNC-3B THD, CYLINDER SUPPORT ----- BOTTOM END
- AP) .625-11UNC-3B THD, YOKE SUPPORT ----- BOTTOM

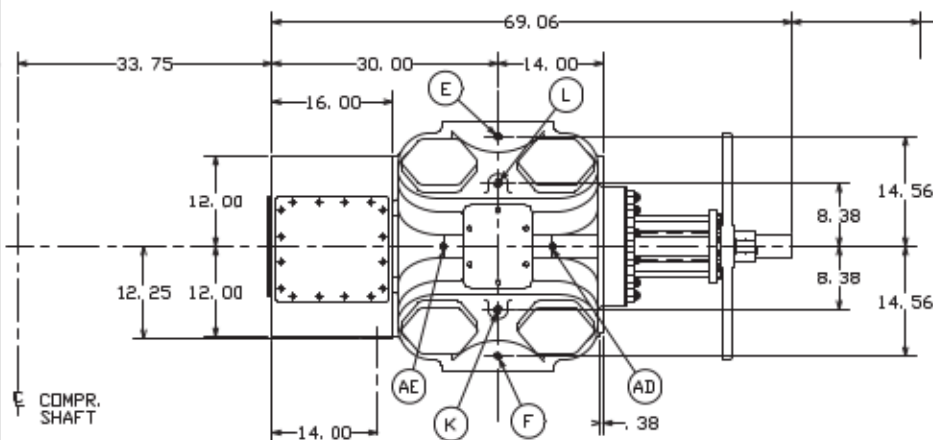


17.00
DISTANCE TO
REMOVE
PISTON & ROD

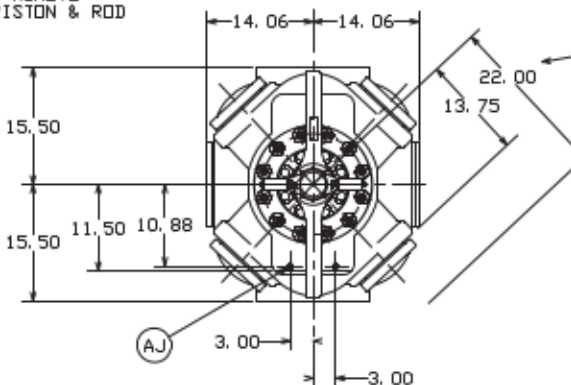

CLEARANCE REQUIRED
FOR VALVE
REMOVAL-TYPICAL

TOTAL WEIGHT APPROX. 3500 LBS

CHG TO: 72 124 149



THIRD ANGLE PROJECTION

DRAWN K. DAVIDSON DATE 30OCT07

CHECKED B. NIESING DATE 30OCT07

APPROVED T. BLAZEJEWSKI DATE 30OCT07

SIZE 6.50/9.50 IN STROKE ALL TYPE HOSS

NAME OF PART OUTLINE - CYLINDER

SIZE C FEDERAL SUPPLY CODE DWG NO. HIH00976 REV. 00

SCALE: 003:1 WT. SHEET 1 OF 1

DWG NO. HIH00976 SH 1

FORM 100-00-00