


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

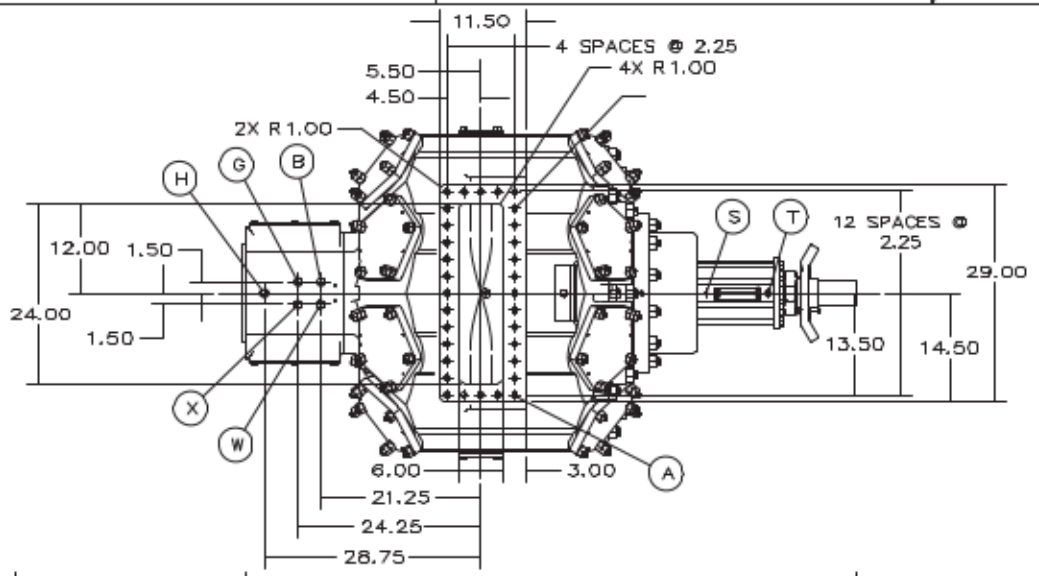


A) 64X .750–10UNC–3A (32 TOP & 32 BOTTOM) STUDS PROJECT 2.75
TOP INLET, BOT DISCHARGE (14.00) EQUIV. PIPE SIZE
B) .25 NPT –– PACKING LUBE CONN ---------- TOP
C) .25 NPT –– PACKING VENT/DRAIN CONN ---------- BOTTOM
D) .75 NPT –– YOKE DRAIN CONN ---------- BOTTOM
E) .25 NPT –– CYL BORE LUBE CONN ---------- TOP
F) .25 NPT –– CYL BORE LUBE CONN ---------- BOTTOM
G) .75 NPT –– YOKE VENT/PURGE CONN (IF REQUIRED)------- TOP
H) .38 NPT –– PACKING COOLANT OUT CONN (IF REQUIRED)---- TOP
J) .38 NPT –– PACKING COOLANT IN CONN (IF REQUIRED)------ BOTTOM
K) .75 NPT –– CYL COOLANT INLET CONN (IF REQUIRED)------- BOTTOM
L) .75 NPT –– CYL COOLANT DISCH CONN (IF REQUIRED)------ TOP
N) .75 NPT –– SPARE CONN ---------- BOTTOM
S) .125 NPT –– VVCP ROD PKG VENT TO NON–HAZ AREA ------ TOP
T) .125 NPT –– GREASE FITTING ---------- TOP
W) .25 NPT –– SCRAPER PURGE CONN (IF REQUIRED)--------- TOP
X) .25 NPT –– PACKING PURGE CONN (IF REQUIRED)---------- TOP
AD) .50 NPT –– OUTER END INDICATOR CONN ---------- SIDE
AE) .50 NPT –– FRAME END INDICATOR CONN ---------- SIDE
AJ) .750–10UNC–3B THD, CYLINDER SUPPORT ---------- BOTTOM END
AP) .625–11UNC–3B THD, YOKE SUPPORT ---------- BOTTOM
BB) .75 NPT –– RTD CONN. (IF REQUIRED)(MAX. INSERTION DEPTH–25.00")

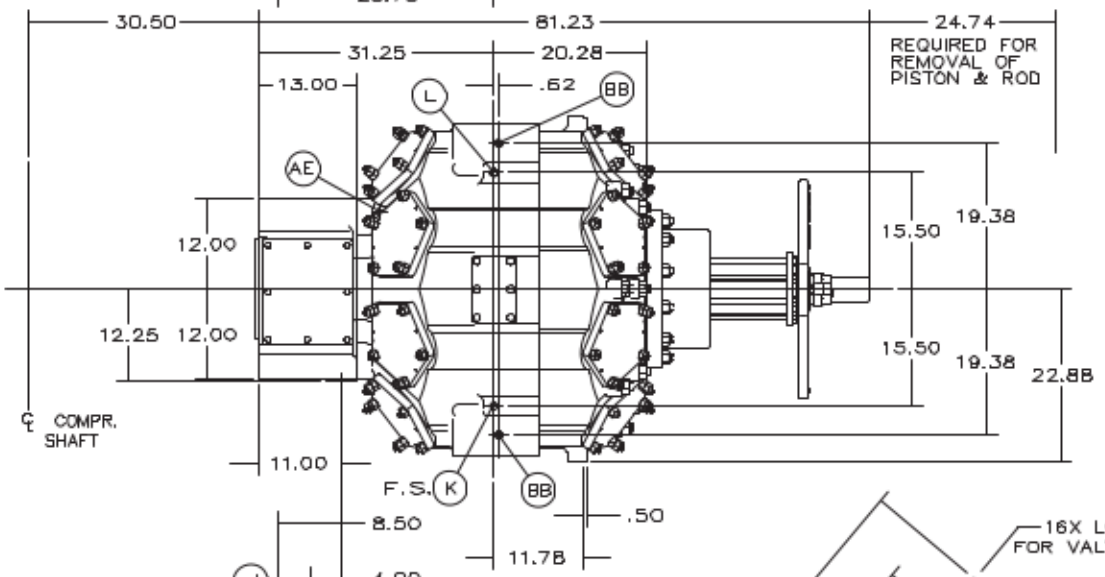

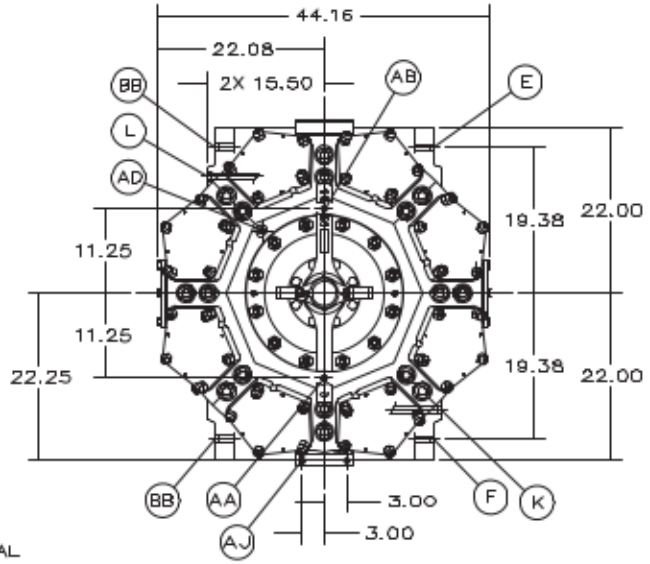

TOTAL WEIGHT: APPROX. 6750 LBS.

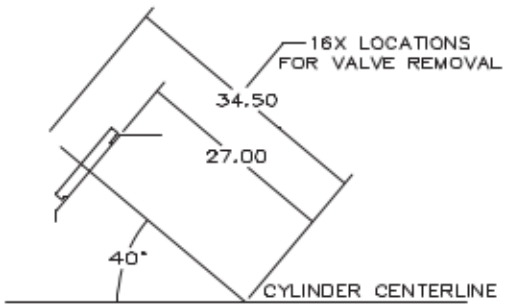

CHG TO: 72 124 149

THIRD ANGLE PROJECTION

DRAWN K.DAVISON	DATE 03DEC08	SIZE 28.00 & 26.50	STROKE ALL	TYPE HOS	
CHECKED B.NIESSING	DATE 03DEC08	NAME OF PART OUTLINE – CYLINDER H.P.			
APPROVED B.NIESSING	DATE 03DEC08	SIZE C	FEDERAL SUPPLY CODE	DWG NO. HIH02608	REV. 00
UG PART		SCALE 1:12	WT.	SHEET 1 OF 1	

DWG NO HIH02608 SH 1

NEW FLANGE-09/02