




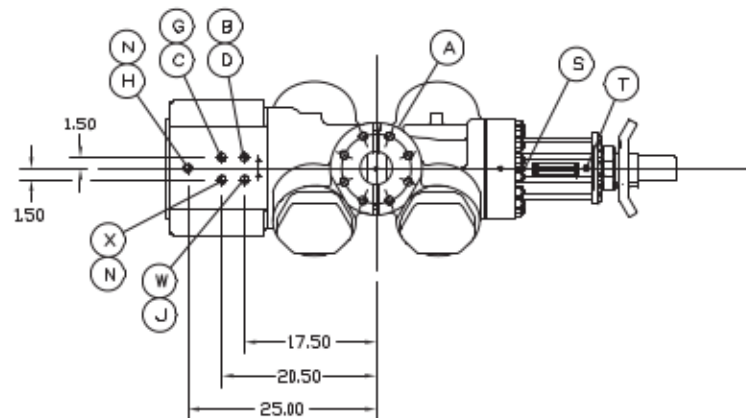

- A) 4.00-900# FF FLANGE CONN-INLET TOP & DISCH. BOTTOM
8-1.125 STUDS ON 9.250 DIA B.C. 12.25 FLANGE DIA
- B) .25 NPT --- PACKING LUBE CONN ----- TOP
C) .25 NPT --- PACKING VENT/DRAIN CONN ----- BOTTOM
D) .75 NPT --- YOKE DRAIN CONN ----- BOTTOM
E) .25 NPT --- CYL BORE LUBE CONN ----- TOP
F) .25 NPT --- CYL BORE LUBE CONN ----- BOTTOM
G) .75 NPT --- YOKE VENT/PURGE CONN (IF REQUIRED) ----- TOP
H) .38 NPT --- PACKING COOLANT OUT CONN (IF REQUIRED) --- TOP
J) .38 NPT --- PACKING COOLANT IN CONN (IF REQUIRED) --- BOTTOM
N) .75 NPT --- SPARE CONN ----- TOP OR BTM
S) .125 NPT --- VVCP ROD PKG VENT TO NON-HAZ AREA ----- TOP
T) .125 NPT --- GREASE FITTING ----- TOP
W) .25 NPT --- SCRAPER PURGE CONN (IF REQUIRED) ----- TOP
X) .25 NPT --- PACKING PURGE CONN (IF REQUIRED) ----- TOP
AD) .50 NPT --- OUTER END INDICATOR CONN ----- SIDE
AE) .50 NPT --- FRAME END INDICATOR CONN ----- SIDE
AJ) .750-10UNC-3B THD, CYLINDER SUPPORT ----- BOTTOM SIDE
AP) .625-11UNC-3B YOKE SUPPORT ----- BOTTOM
BB) .75 NPT --- RTD CONN (IF REQUIRED)

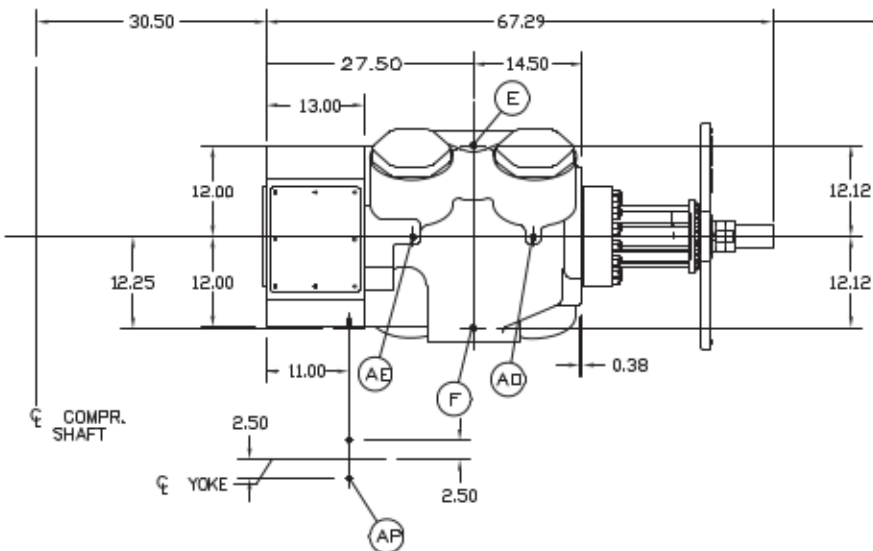

17.30
REQUIRED FOR
REMOVAL OF
PISTON & ROD

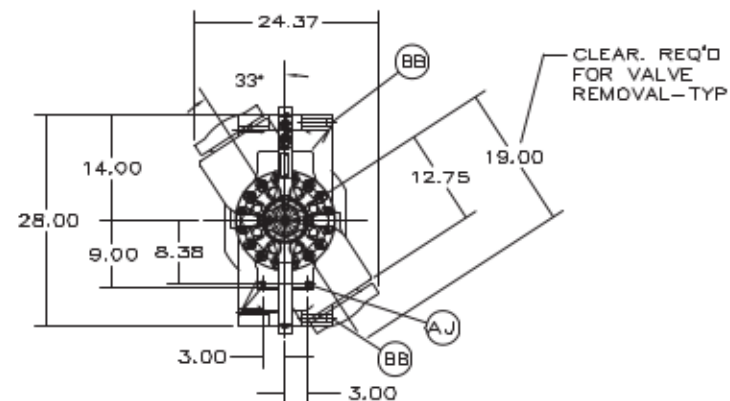

CLEAR. REQ'D
FOR VALVE
REMOVAL-TYP

TOTAL WEIGHT: APPROX. 2830 LBS

CHG TO: 124 149

THIRD ANGLE PROJECTION		SIZE		STROKE	TYPE
DRAWN K.DAVISON		7.00	5/6/7.00	H05	
CHECKED B.NIESSING		NAME OF PART			
APPROVED B.NIESSING		OUTLINE - 7.00" CYLINDER W/VVCP			
UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES		SIZE C	FEDERAL SUPPLY CODE	DRAWING NO. HJH00710	REV. 00
SCALE 1:12		WT.		SHEET 10F1	

DWG NO
HJH00710
SH 1

FORM PLUMB-M-100