


HOS technical datasheet

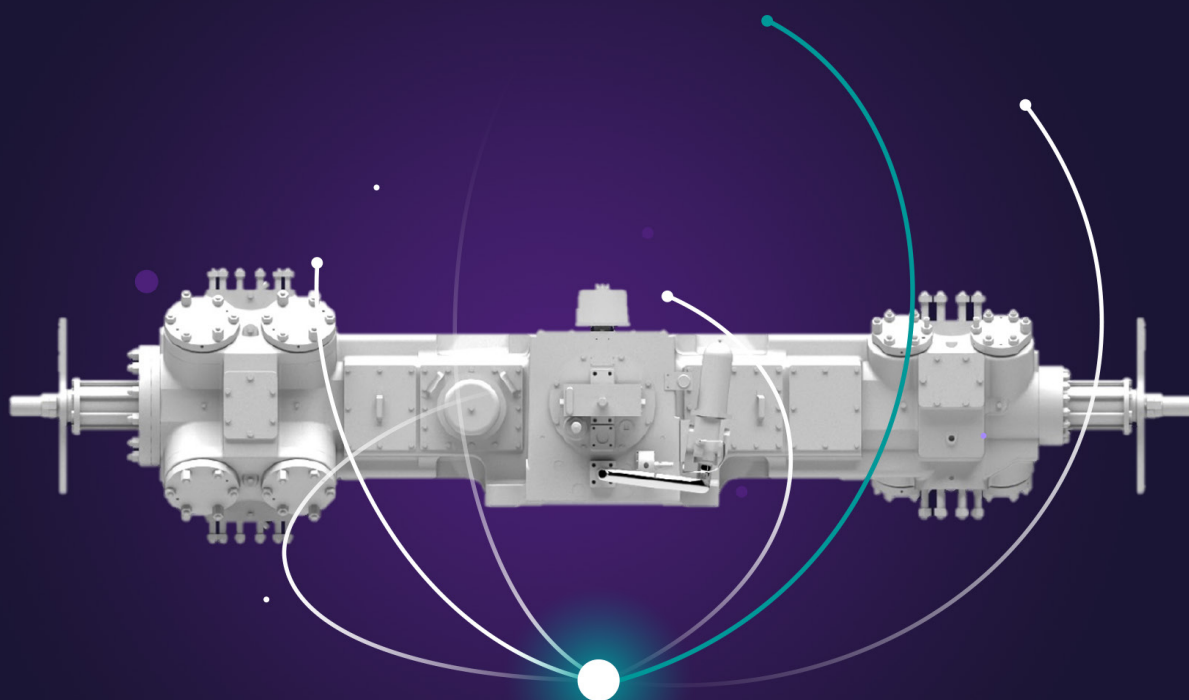

General information

Max allowable continuous combined rod load (T or C)	60,000 lbs		
Max allowable continuous gas load (T or C)	69,000 lbs		
Total gas load	138,000 lbs		
Piston rod diameter	2.50"		
Stroke	5.00"	6.00"	7.00"
Maximum rated speed	1500 RPM	1200 RPM	1000 RPM
Minimum rated speed	500 RPM	500 RPM	500 RPM
Average piston speed at max RPM	1250 ft/min	1200 ft/min	1167 ft/min

Frame information

Number of throws	2 Throw	4 Throw	6 Throw
Crankcase oil capacity	21 Gallons	57 Gallons	96 Gallons
Oil pump capacity at 1000 rpm	40 GPM	70 GPM	110 GPM
Oil flow to cooler/filter	23 GPM	46 GPM	69 GPM
Normal frame oil temperature	150 °F - 170 °F		
Maximum frame oil temperature	180 °F		
Normal oil header pressure	50 PSI - 65 PSI		
Minimum oil header pressure	40 PSI		
Oil header pressure shutdown setting	35 PSI		
Minimum start-up oil temperature	80 °F		
Minimum frame oil temperature to load	90 °F		
Maximum oil filter differential pressure	15 PSI		
Crankshaft thrust	.018" - .022"		
Frame mounted oil pump thrust	.006" - .009"		
Oil pump coupling hub offset	.062"		
Vertical frame thermal growth	.005" - .008"		
Balance tolerance of opposing throws - onshore	+/- 2 lbs		
Balance tolerance of opposing throws - offshore	+/- 1 lbs		
Maximum distance piece internal pressure	25 PSI		
Top main bearing clearance	.007" - .010" Feeler gauge		
Connecting rod bearing to crankpin diametrical clearance	.007" - .010" micrometer		
Type I crosshead pin to crosshead diametrical clearance	.003" - .006" micrometer		
Type II crosshead pin to crosshead diametrical clearance	.0015" - .003" micrometer		
Crosshead pin to conn rod bushing diametrical clearance	.002" - .006" micrometer		
Cold top crosshead shoe to guide clearance	.012" - .017" feeler gauge		

Cylinder information

Frame end cold bump clearance	.043" - .082"							
Outer end cold bump clearance	.064" - .123"							
Maximum gas discharge temperature	350 °F							
Cooled packing coolant flow rate per packing	2.5 GPM							
Normal coolant pressure	35 PSI							
Maximum coolant pressure	75 PSI							
Maximum cold horizontal piston rod runout	.003"							
Maximum cold vertical piston rod runout								
	4.75" - 7.75" cylinder dia.	8.00" - 10.50 " cylinder dia.	11.50" - 13.00" cylinder dia.	14.00" - 16.25" cylinder dia.	17.50" - 19.00" cylinder dia.	20.50" - 23.00" cylinder dia.	24.50" - 26.50" cylinder dia.	28.00" cylinder dia.
	.0000" - .0020"	.0005" - .0025"	.0015" - .0035"	.0025" - .0045"	.0030" - .0055"	.0040" - .0060"	.0045" - .0065"	.0050" - .0070"

Published by
Siemens Energy Global GmbH & Co. KG
Transformation of Industry
siemenspromenade 9
91058 Erlangen
Germany
Siemens Energy, Inc.
Transformation of Industry
4400 Alafaya Trail
Orlando, Florida 32826 USA

Subject to changes and errors. The information given in this document only contains general descriptions and/or performance features which may not always specifically reflect those described, or which may undergo modification in the course of further development of the products. The requested performance features are binding only when they are expressly agreed upon in the concluded contract. All product designations may be trademarks or product names of Siemens Energy Global GmbH & Co. KG or other companies whose use by third parties for their own purposes could violate the rights of the owners.

Siemens Energy is a trademark licensed by Siemens AG.