
Fiber-optic FPV | 90 m AGL | Budget 8 | 16 candidate sites (9 shown)

Unseen sensor | Qwen2.5-7B, SFT + GRPO, seed 0 | NW weight: 3; others: 1

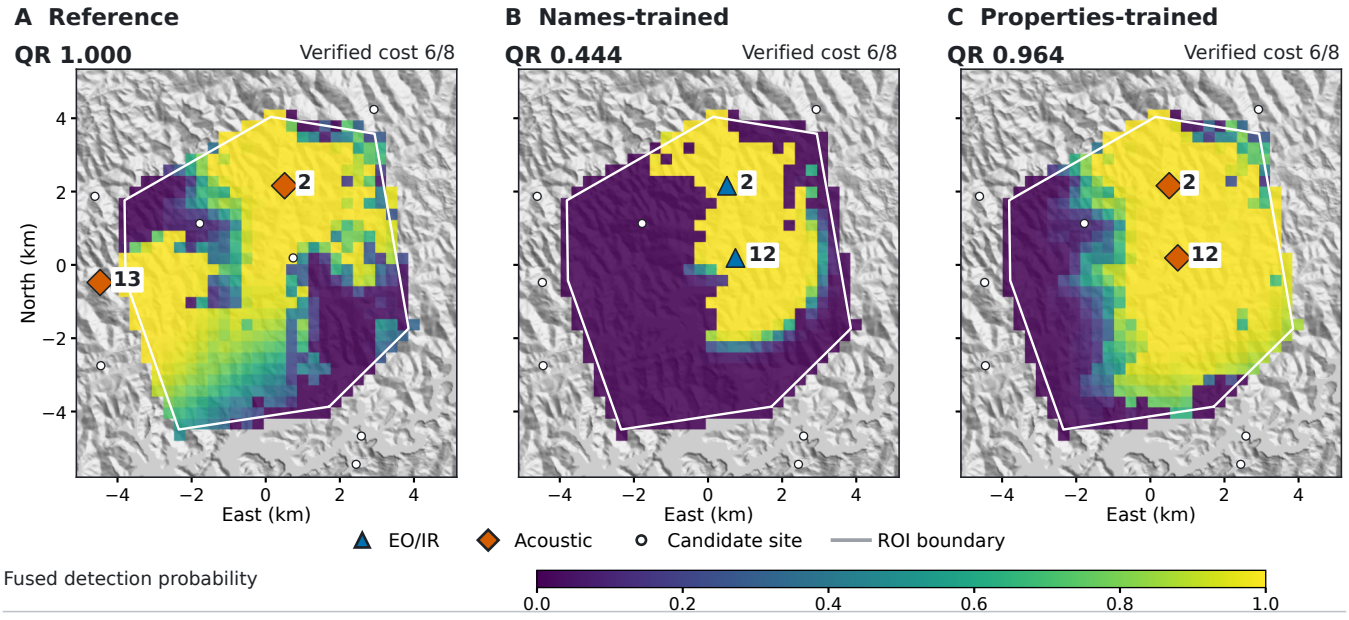

Acoustic at sites 2, 13

4.6 km | unit cost 3 | LOS: no

Reference solution

Certified optimal by branch and bound for this instance.

EO/IR at sites 2, 12

2.4 km | unit cost 3 | LOS: yes

Generated rationale (excerpts)

“eo 2.4 km for cost 3, [...]
ac 4.6 km for cost 3”
“eo, range 2.4 km, open view”

Acoustic at sites 2, 12

4.6 km | unit cost 3 | LOS: no

Generated rationale (excerpts)

“d 4.6 km for cost 3”
“d, range 4.6 km,
no line of sight needed”

Ranges are for open terrain. LOS: line-of-sight requirement. d = acoustic (reader mapping).