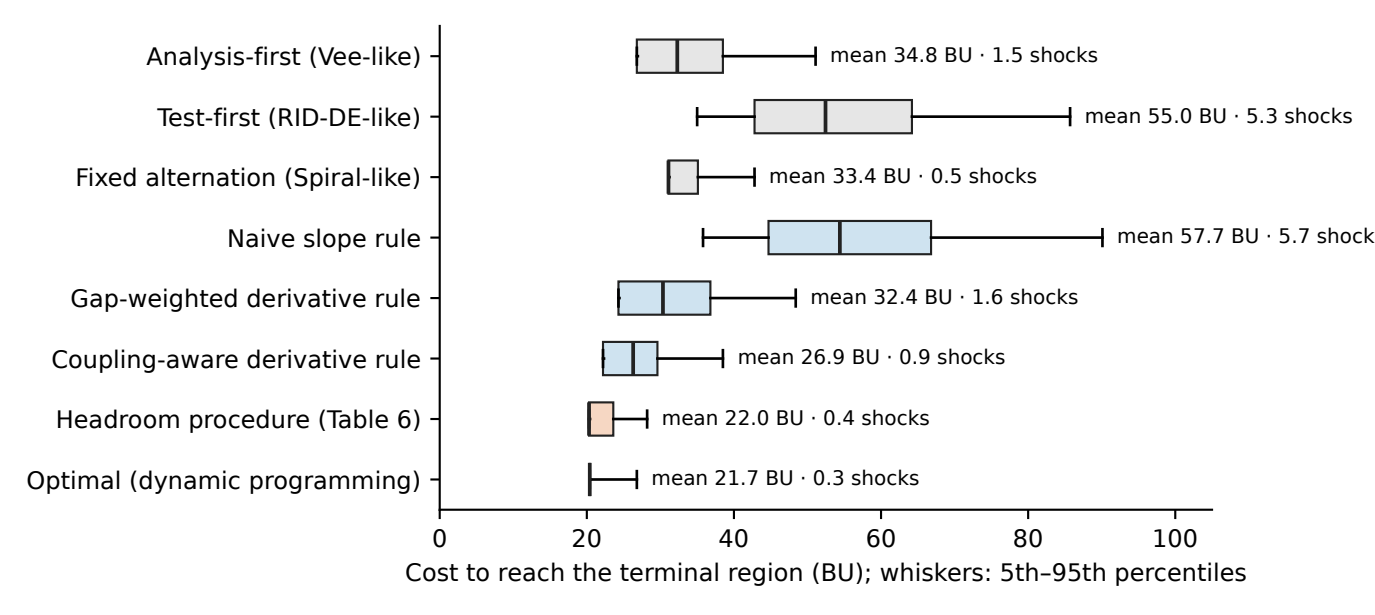
Analysis-first (Vee-like)
Test-first (RID-DE-like)
Fixed alternation (Spiral-like)
Naive slope rule
Gap-weighted derivative rule
Coupling-aware derivative rule
Headroom procedure (Table 6)
Optimal (dynamic programming)
mean 34.8 BU · 1.5 shocks
mean 55.0 BU · 5.3 shocks
mean 33.4 BU · 0.5 shocks
mean 57.7 BU · 5.7 shock
mean 32.4 BU · 1.6 shocks
mean 26.9 BU · 0.9 shocks
mean 22.0 BU · 0.4 shocks
mean 21.7 BU · 0.3 shocks
0
20
40
60
80
100
Cost to reach the terminal region (BU); whiskers: 5th–95th percentiles