




FRONT VIEW



SIDE VIEW

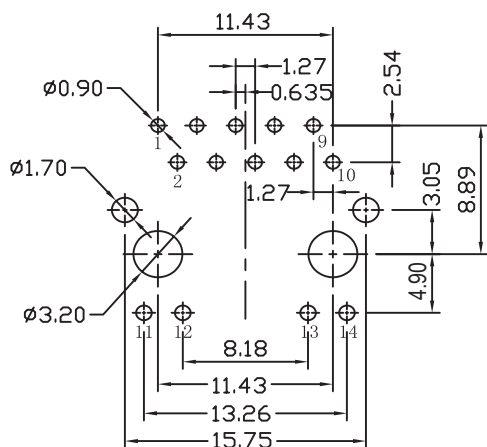

SUGGESTED PCB LAYOUT (TOP VIEW)

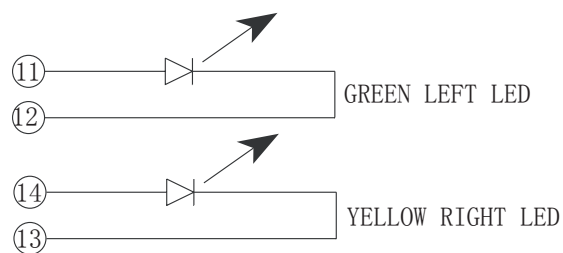

ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

Insertion Loss: 1-100MHZ -1.0dB MAX

Return Loss: 1-30MHZ -16.0dB MIN
30-60MHZ -14.0dB MIN
60-80MHZ -10.0dB MIN


Cross Talk: 1-30MHZ -40.0dB MIN
30-60MHZ -35.0dB MIN
60-80MHZ -30.0dB MIN

CMR: 1-100MHZ -35.0dB MIN

Hi-Pot: 1500v AC 6S 1mA

Turn Ratio: 1CT:1CT+/-3%

OCL:350uH MIN @ 100KHZ 100mV 8mA DC

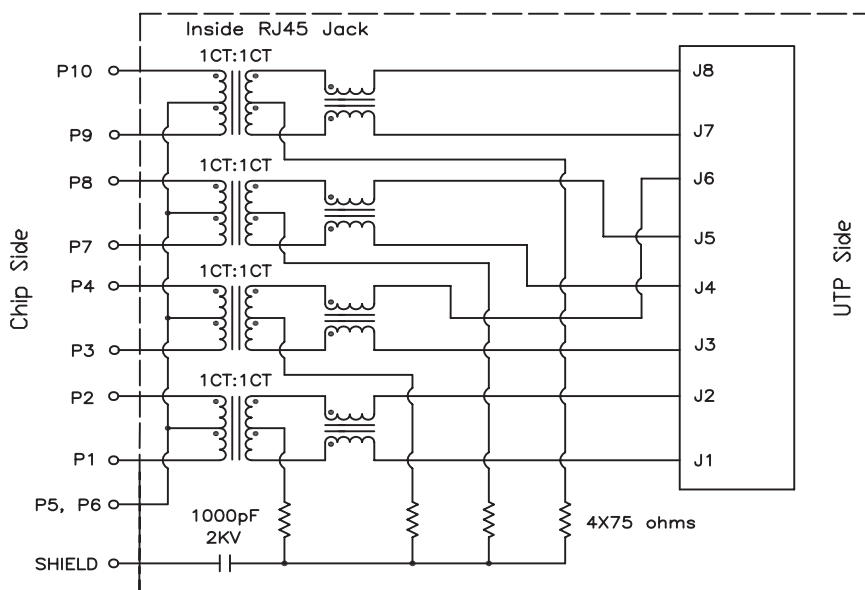

Contacts: 0.35mm thick phos bronze plated with 6u' gold in contact are

Housing Material: PBT Black

Operating temperature range: -40 ° C- + 85 ° C

上海飞芯电子科技有限公司
021-52060235

UNIT :mm
.xx +/-0.25, .xxx +/-0.13

1000BASE
1X1 Tab-Down RJ45

Approved By:

Part No:FC-202GYDNL

REV.
B

Drafted by:

WWW.FLY_CORE.COM SHEET 1 OF 1