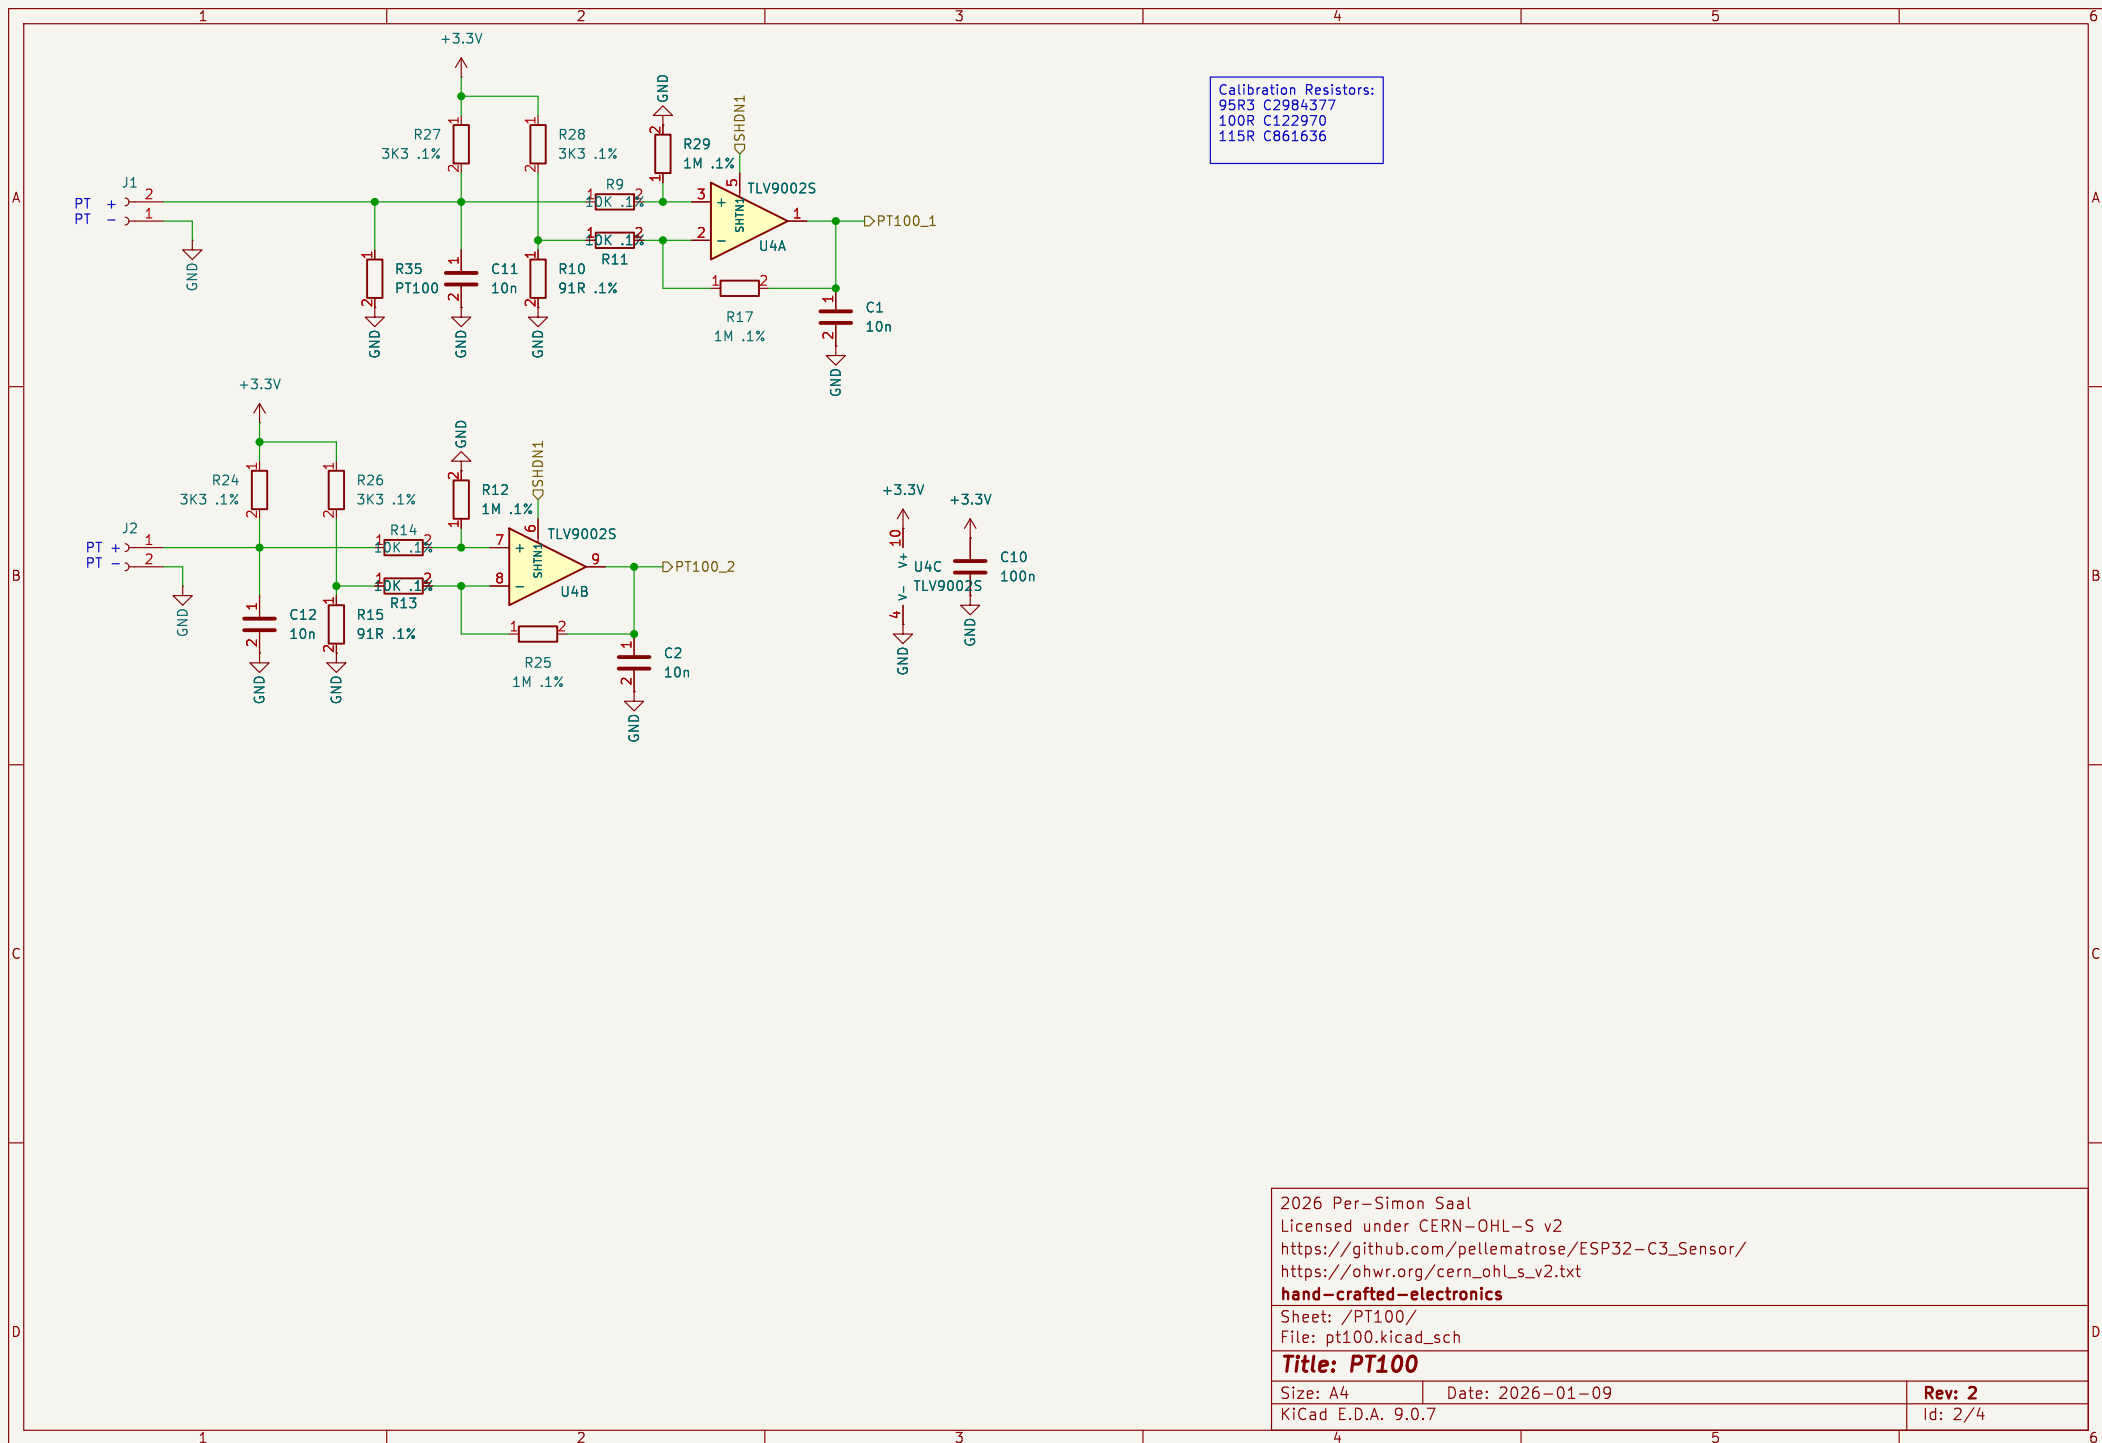






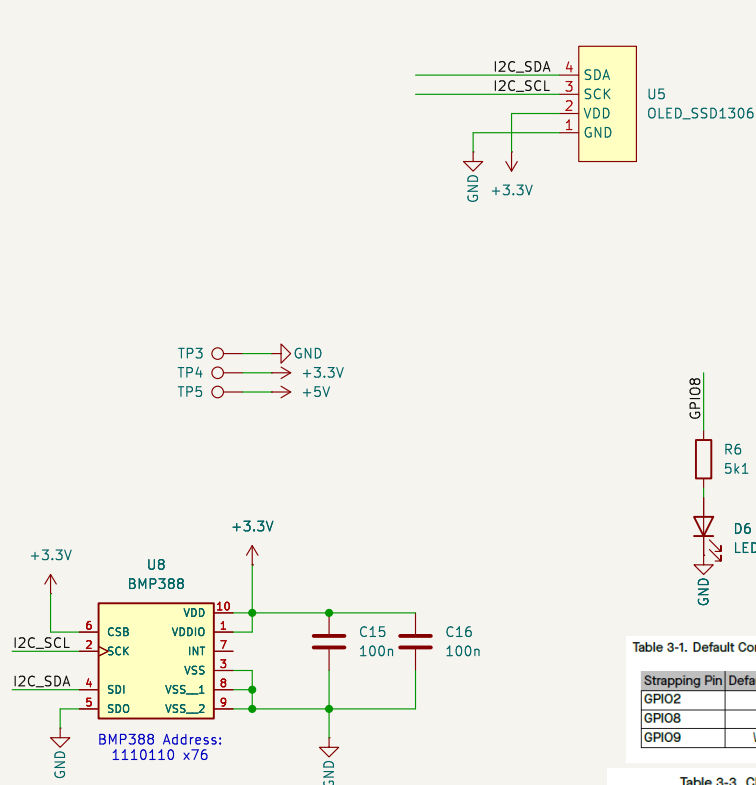


Table 3-1. Default Configuration of Strapping Pins

| Strapping Pin | Default Configuration | Bit Value |
|---------------|-----------------------|-----------|
| GPIO2         | Floating              | -         |
| GPIO8         | Floating              | -         |
| GPIO9         | Weak pull-up          | 1         |

Table 3-3. Chip Boot Mode Control

| Boot Mode                             | GPIO2 <sup>2</sup> | GPIO8     | GPIO9 |
|---------------------------------------|--------------------|-----------|-------|
| <b>SPI boot mode</b>                  | 1                  | Any value | 1     |
| Joint download boot mode <sup>3</sup> | 1                  | 1         | 0     |

<sup>1</sup> **Bold** marks the default value and configuration.

<sup>2</sup> GPIO2 actually does not determine SPI Boot and Joint Download Boot mode, but it is recommended to pull this pin up due to glitches.

<sup>3</sup> Joint Download Boot mode supports the following download methods:

- USB-Serial-JTAG Download Boot
- UART Download Boot

2026 Per-Simon Saal  
 Licensed under CERN-OHL-S v2  
[https://github.com/pellematrose/ESP32-C3\\_Sensor/](https://github.com/pellematrose/ESP32-C3_Sensor/)  
[https://ohwr.org/cern\\_ohl\\_s\\_v2.txt](https://ohwr.org/cern_ohl_s_v2.txt)

**hand-crafted-electronics**

Sheet: /Controller/  
 File: controller.kicad\_sch

**Title: Controller**

Size: A4 Date: 2026-01-09

KiCad E.D.A. 9.0.7

**Rev: 2**

Id: 4/4