SYNTHETIC PORTABILITY REFERENCE

Sheet 1/2 | 100 base pixels per metre | base coordinates = 2 x PDF points

Known geometry for persistence checks. This is not an approved representative construction plan.

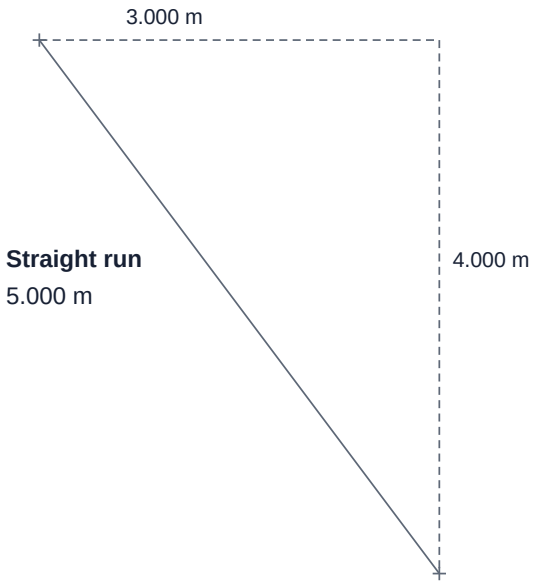

Straight run

5.000 m

Calibration reference = 4.000 m

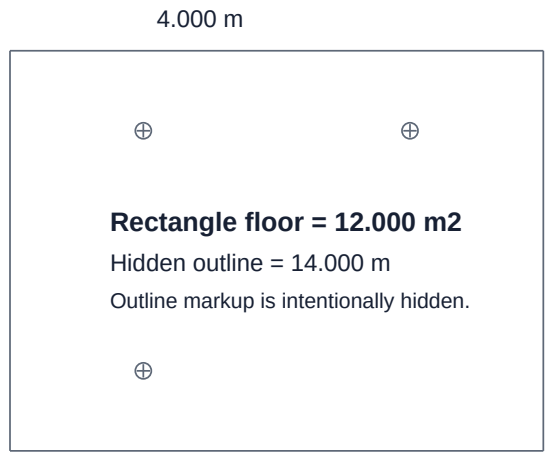

Rectangle floor = 12.000 m2

Hidden outline = 14.000 m

Outline markup is intentionally hidden.

3 outlet pins on this sheet; 2 more on sheet 2.

Straight wall: length 4.000 m; height 2.500 m

Wall area = 10.000 m2

All dimensions refer to exact source geometry; display rounding is separate. No external PDF is required.

SYNTHETIC PORTABILITY REFERENCE

Sheet 2/2 | 200 base pixels per metre | base coordinates = 2 x PDF points

Known geometry for persistence checks. This is not an approved representative construction plan.

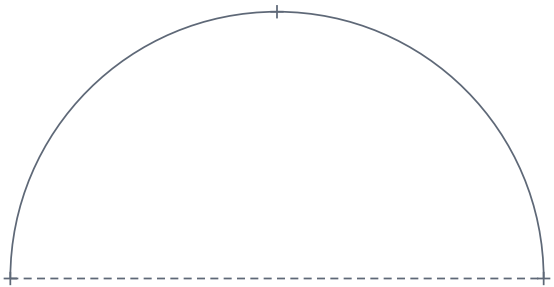

Diameter 2.000 m; radius 1.000 m

Arc run = pi m = 3.141592654 m

Arc wall H = 3.000 m; area = 3*pi m2

2 more outlets: project total = 5 ea

Straight run = 2.000 m (project total 7.000 m)

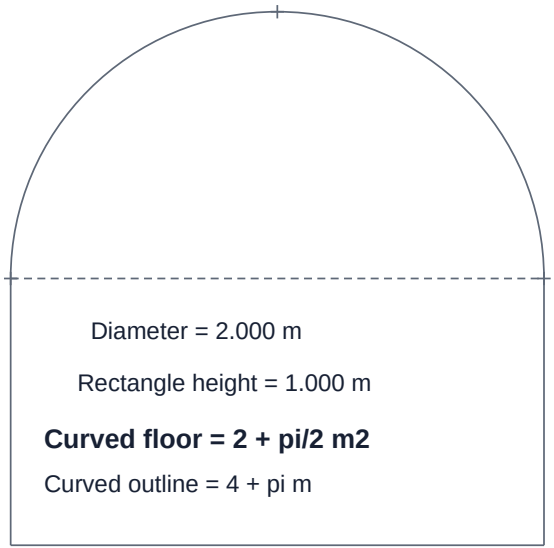

Diameter = 2.000 m

Rectangle height = 1.000 m

Curved floor = 2 + pi/2 m2

Curved outline = 4 + pi m

Area 3.570796327 m2 | Perimeter 7.141592654 m

All dimensions refer to exact source geometry; display rounding is separate. No external PDF is required.