


EC centrifugal fan

forward curved, single inlet
with housing (without flange)

**ebm-papst Mulfingen GmbH & Co. KG**

Bachmühle 2

D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Nominal data

Type	G1G133-DE03-02	
Motor	M1G055-BD	
Nominal voltage	VDC	48
Nominal voltage range	VDC	36 .. 56
Type of data definition		rfa
Speed	min ⁻¹	2000
Power input	W	45
Current draw	A	1.1
Max. ambient temperature	°C	60

ml = max. load · me = max. efficiency · rfa = running at free air · cs = customer specs · cu = customer unit
Subject to alterations

EC centrifugal fan

forward curved, single inlet
with housing (without flange)


Technical features

General description	Integrated electronics
Size	133 mm
Operation mode	Continuous operation (S1)
Direction of rotation	Clockwise, seen on rotor
Mounting position	Any
Humidity class	F0
Insulation class	"B"
Cable exit	Lateral
Motor bearing	Ball bearing
Mass	1.3 kg
Material of electronics housing	Rotor: Galvanized
Material of impeller	Hot-dip galvanized sheet steel
Motor protection	Reverse polarity and locked-rotor protection
Type of protection	IP 22
Protection class	I
Technical features	Control input 0-10 VDC / PWM, tach output, polarity and locked rotor protection
Approval	CCC

EC centrifugal fan

forward curved, single inlet
with housing (without flange)



Product drawing

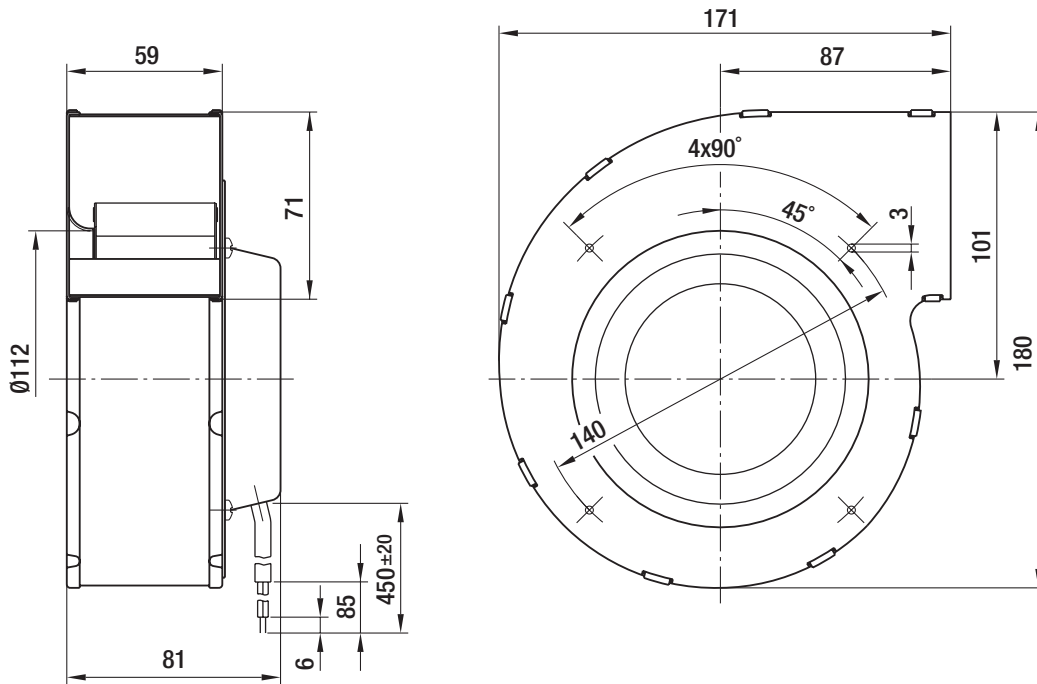

EC centrifugal fan

forward curved, single inlet
with housing (without flange)

Connection screen

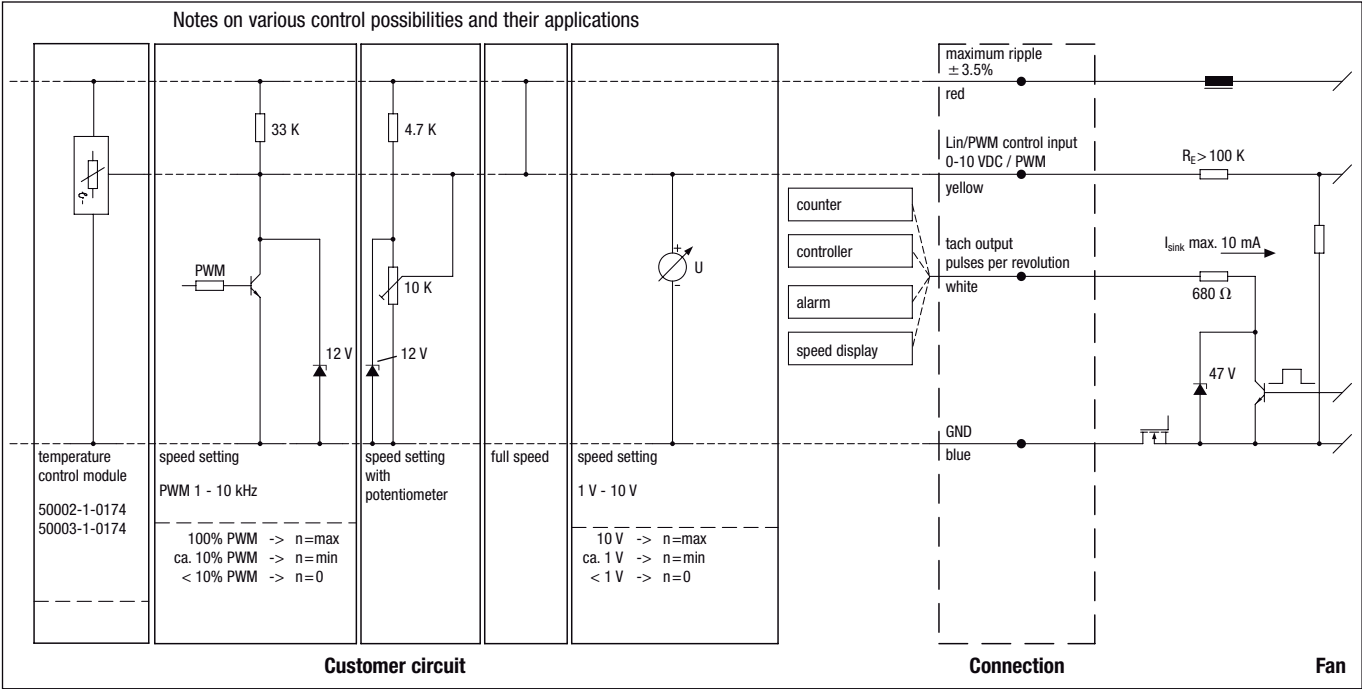


Line	Signal	Colour	Assignment / function	Line	Signal	Colour	Assignment / function
1	+	red	maximum ripple ± 3.5 %	1	Tacho	white	Tach output: pulses per revolution
	GND	blue	GND		0-10 V / PWM	yellow	Control input

EC centrifugal fan

forward curved, single inlet
with housing (without flange)

Charts: Air flow

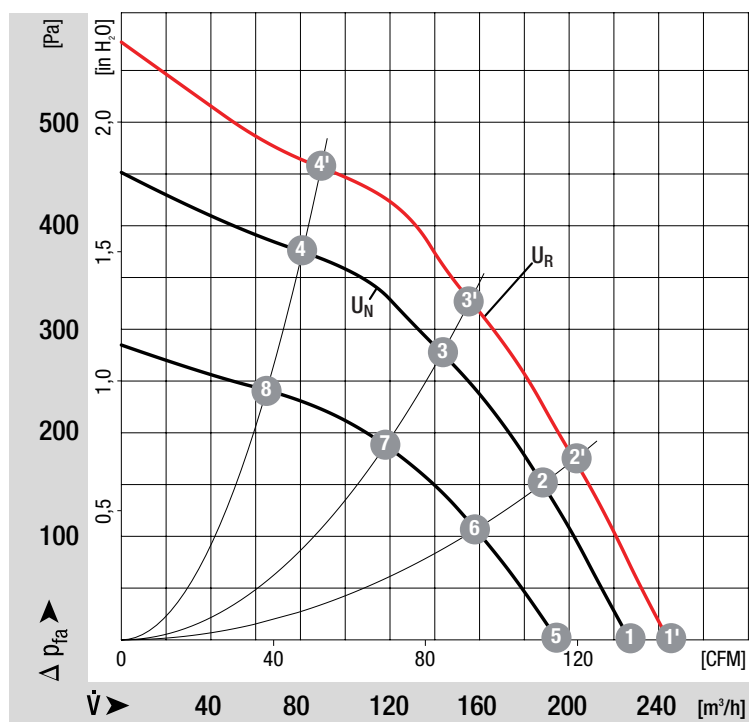

Measured values

	n	P _e
	min ⁻¹	W
1'	2170	57
2'	2410	51
3'	2750	44
4'	3200	36
1	2000	45
2	2230	40
3	2540	35
4	2920	27
5	1750	28
6	1910	24
7	2120	20
8	2370	15