



## DC-DC (9-48 to 5V)

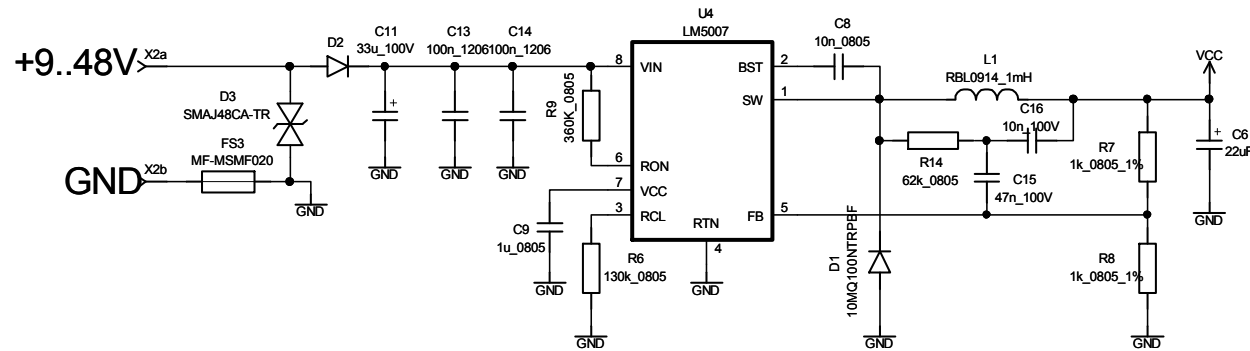


## RS-485


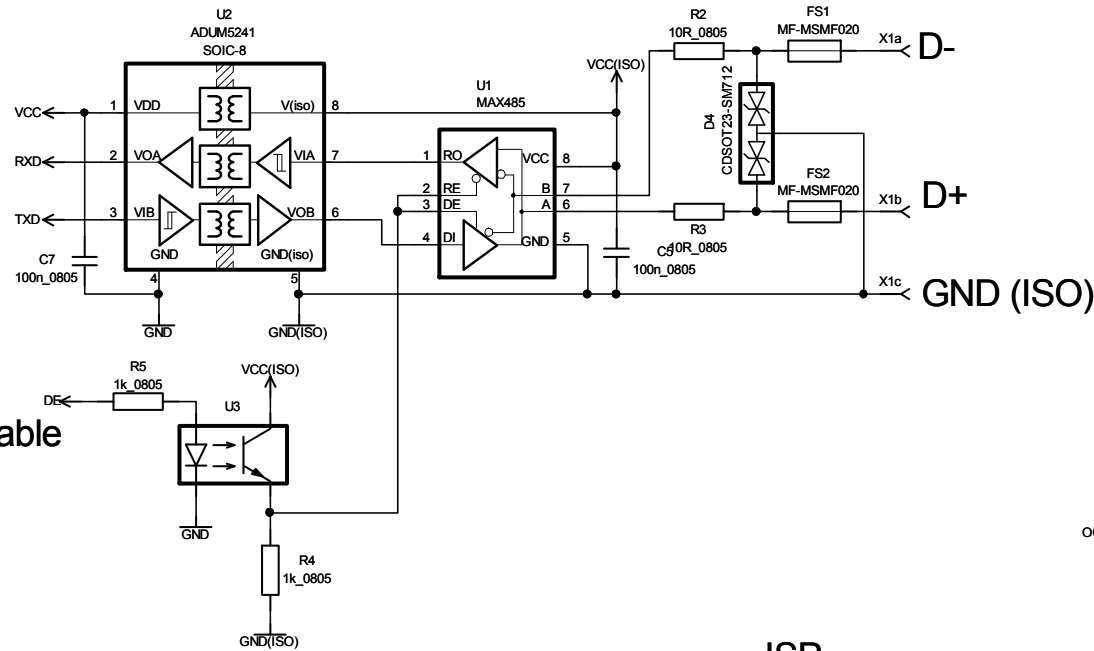


low - receiver enable  
high - driver output enable

## JUMPERS



## ISP

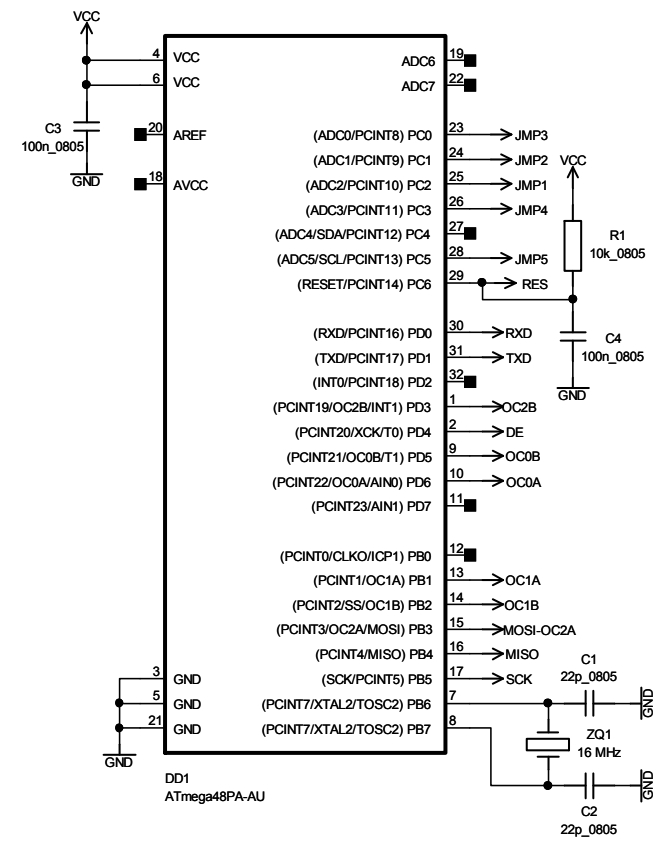

## OUTPUT

