

DRYWALL PRO

200 Ready-to-Use Technical Blueprints

Complete construction details, framing schematics, and
assembly guides for every drywall application.

PROFESSIONAL REFERENCE

Table of Contents

10 categories · 200 blueprints · Complete technical reference


01	Standard Wall Assemblies	Plans 1 – 20
02	Ceiling Assemblies	Plans 21 – 40
03	Corner Details	Plans 41 – 60
04	Arch & Curved Wall Construction	Plans 61 – 78
05	Bulkheads & Soffits	Plans 79 – 96
06	Fire-Rated Assemblies	Plans 97 – 116
07	Soundproof Assemblies	Plans 117 – 136
08	Moisture Barrier Details	Plans 137 – 154
09	Door & Window Framing	Plans 155 – 174
10	Electrical & Plumbing Boxing	Plans 175 – 200

CATEGORY 01

Standard Wall Assemblies

Plans 1 – 20 cover the most common wall configurations, from single-layer residential partitions to heavy-duty double-layer commercial assemblies.

#001 Single-Layer 1/2" Drywall on Wood Studs — 16" OC

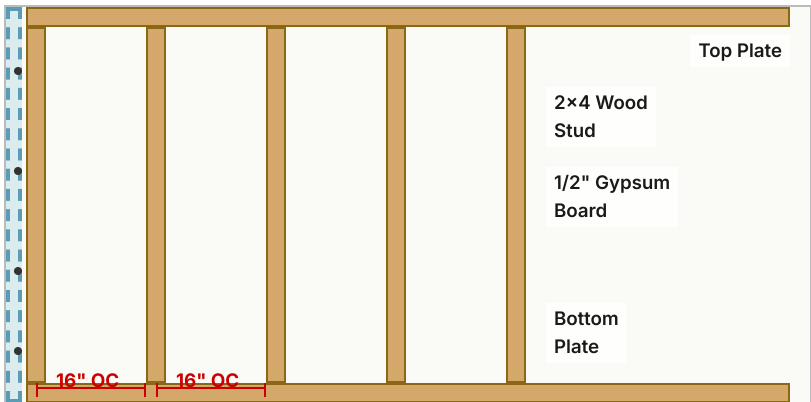

Standard residential wall assembly. Single layer of 1/2" gypsum board attached to 2x4 wood studs at 16" on center. Most common configuration for interior partitions.


MATERIALS

- 1/2" gypsum board
- 2x4 SPF studs
- 2x4 top & bottom plates
- 1-1/4" drywall screws

SPECIFICATIONS

Stud spacing	16" OC
Screw spacing	12" field / 8" edge
Wall thickness	4-1/2"
Fire rating	None (add Type X)

#002 Single-Layer 5/8" Drywall on Metal Studs — 24" OC

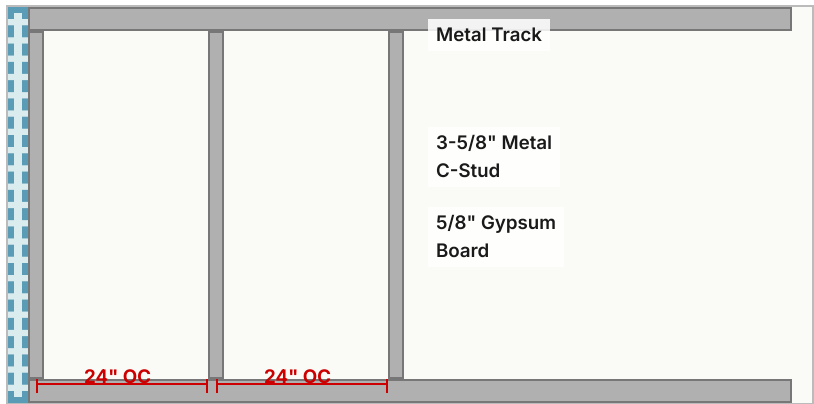

Commercial-grade wall assembly using light-gauge steel framing. 5/8" drywall on 3-5/8" metal studs at 24" on center. Common in commercial tenant improvements.


MATERIALS

- 5/8" gypsum board
- 3-5/8" 25-ga. metal C-studs
- 3-5/8" metal track (top & bottom)
- 1" Type S drywall screws

SPECIFICATIONS

Stud spacing	24" OC
Screw spacing	12" field / 8" edge
Wall thickness	4-1/4"
Max height	10' (25-ga.)

#003 Double-Layer Drywall on Wood Studs — 16" OC

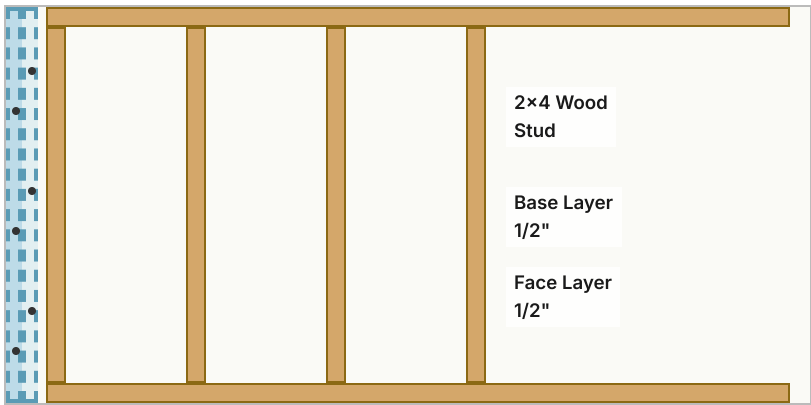

Double-layer assembly for enhanced fire resistance and sound attenuation. Base layer screwed to studs; face layer laminated with adhesive and screwed. Stagger joints 12" minimum.


MATERIALS

- 1/2" gypsum board (x2 layers)
- 2x4 SPF studs
- 1" screws (base layer)
- 1-5/8" screws (face layer)
- Laminating adhesive

SPECIFICATIONS

Wall thickness	5-1/2"
Fire rating	Up to 1-hour
STC	34 – 39
Joint offset	12" min.

#004 Partition Wall with Insulation — Wood Studs 16" OC

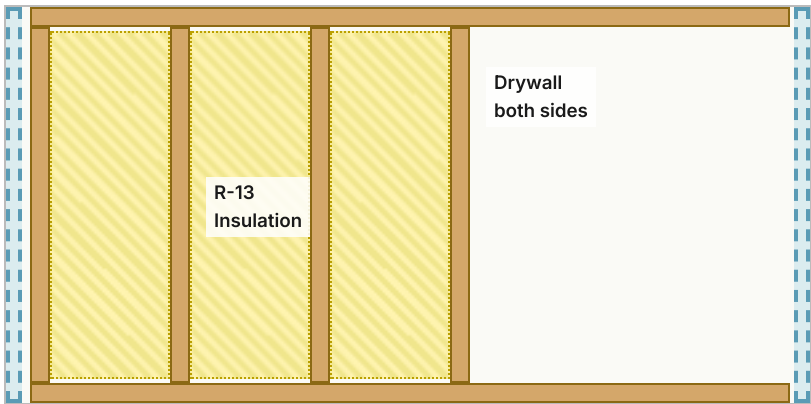

Insulated partition wall for improved sound transmission. R-13 fiberglass batts friction-fit between studs. Drywall applied to both faces.

MATERIALS

- 1/2" gypsum board (both sides)
- 2x4 SPF studs
- R-13 fiberglass batt insulation
- 1-1/4" drywall screws

SPECIFICATIONS

Wall thickness	4-1/2"
STC rating	39 – 43
Thermal	R-13
Stud spacing	16" OC

Plans 5 – 20: Quick Reference


#	Plan Title	Description
005	Single-Layer 1/2" on Metal Studs 16" OC	Light commercial interior partition with steel framing
006	Single-Layer 5/8" on Wood Studs 16" OC	Enhanced residential wall with thicker board
007	Double-Layer on Metal Studs 24" OC	Commercial double-layer with steel framing
008	2×6 Wall Assembly — Single Layer	Deeper cavity for R-19 insulation in exterior walls
009	2×6 Wall Assembly — Double Layer	Maximum performance with deep cavity and double board
010	Staggered Stud Partition (2×4 on 2×6 plate)	Alternating studs for improved acoustics
011	Furring Strip Wall over Masonry	1×3 furring strips on concrete/CMU
012	Hat Channel on Concrete	Metal hat channel furring on poured concrete walls
013	Adhesive-Applied (GL) to Concrete	Direct adhesive lamination to smooth concrete
014	Shaft Wall Assembly (C-H Stud)	Elevator and mechanical shaft liner wall
015	Area Separation Wall (H-Stud)	Townhouse/multi-family party wall
016	Chase Wall (Back-to-Back Metal Studs)	Plumbing chase with dual stud rows
017	Radius Wall on Metal Track	Gentle curves using field-bent track
018	Short Partition / Pony Wall	Half-height wall with cap and blocking
019	Demising Wall (Tenant Separation)	Full-height commercial tenant separation to deck
020	Exterior Sheathing + Interior Drywall	Full exterior wall stack-up with WRB

CATEGORY 02

Ceiling Assemblies

Plans 21 – 40 cover ceiling installations, from standard joist-mounted to suspended grid systems and specialty vaulted constructions.

#021 Standard Ceiling on Wood Joists — 16" OC

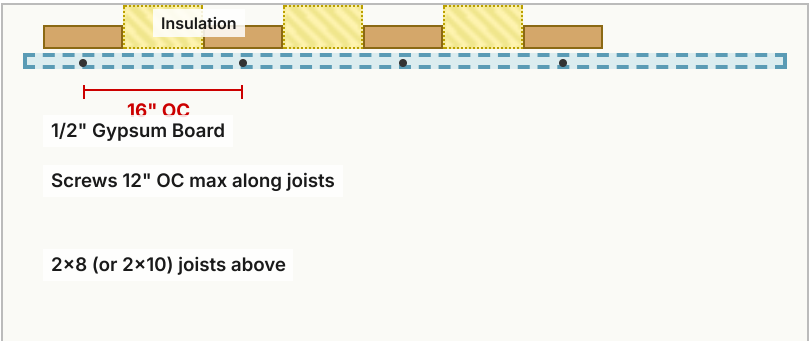


Standard residential ceiling with single-layer 1/2" gypsum screwed directly to wood joists. Insulation placed above for thermal and acoustic performance.

- MATERIALS**
- 1/2" gypsum board (ceiling grade)
 - 1-1/4" drywall screws
 - R-30 or R-38 insulation (above)

SPECIFICATIONS

Joist spacing	16" OC
Screw spacing	12" OC max
Board orientation	Perpendicular to joists
Max span	16" OC for 1/2"

#022 Suspended / Dropped Ceiling Framing (Furring Grid)

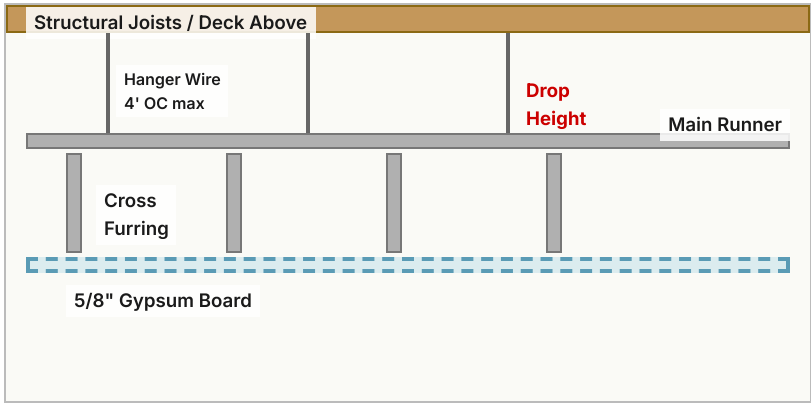

Suspended ceiling using wire hangers, main runners, and cross furring channels. Creates a void for mechanical, electrical, and plumbing above the ceiling plane.


MATERIALS

- 5/8" gypsum board
- 1-1/2" main runner channel
- 7/8" cross furring channel
- 12-ga. hanger wire
- Wire ties, clips

SPECIFICATIONS

Hanger spacing	4' OC max
Furring spacing	16" or 24" OC
Min. drop	3" below structure
Max span	Per load tables

#023 Cathedral / Vaulted Ceiling Framing

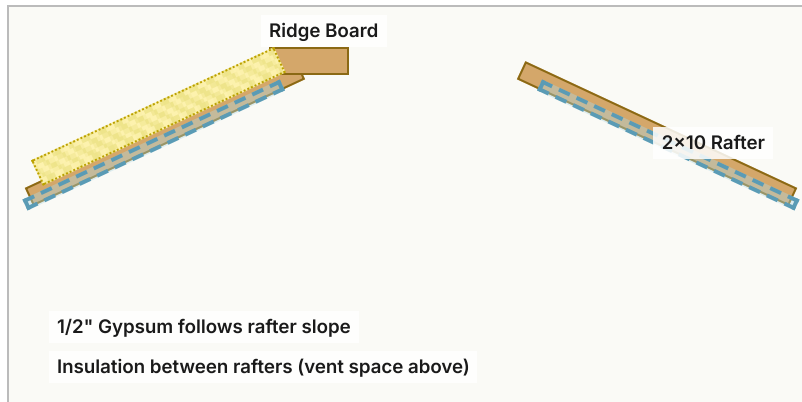

Vaulted ceiling with drywall following the roof rafter slope. Requires insulation baffles to maintain ventilation above the insulation between rafters.

MATERIALS

- 1/2" gypsum board
- R-30 batt insulation
- Polystyrene vent baffles
- 1-1/4" drywall screws

SPECIFICATIONS

Rafter spacing	16" or 24" OC
Vent space	1" min above insulation
Board	1/2" at 16" OC
Pitch	Any standard pitch

Plans 24 – 40: Quick Reference

#	Plan Title	Description
024	5/8" Ceiling on Metal Furring 16" OC	Metal furring channel screwed to wood joists
025	Double-Layer Ceiling (Fire Rated)	Two layers of Type X for 1-hour ceiling rating
026	Resilient Channel Ceiling	Improved STC with RC-1 channels on joists
027	Coffered Ceiling Framing	Built-up soffits in grid pattern for decorative look
028	Tray Ceiling (Recessed Center)	Stepped-up center panel with perimeter soffit
029	Barrel Vault Ceiling	Curved framing for arched ceiling profile
030	Sloped Ceiling Transition to Flat	Transition from vaulted to flat ceiling plane
031	Garage Ceiling (5/8" Type X Required)	Code-required fire separation at garage ceiling
032	Basement Ceiling on Furring	Ceiling below floor joists in basement
033	Ceiling with Recessed Lighting Prep	Blocking and clearance for IC-rated can lights
034	Ceiling Fan Bracing Detail	Blocking between joists for ceiling fan box
035	Attic Hatch Framing	Framed opening with trim for attic access
036	Skylight Well Framing	Splayed well from roof skylight to ceiling plane


#	Plan Title	Description
037	Beam Wrap (Decorative)	Drywall wrapping around structural beam
038	Cloud / Floating Ceiling Panel	Suspended island panel below main ceiling
039	Exterior Soffit (Protected)	Exterior-rated board on porch/soffit framing
040	Multi-Level Ceiling Step	Framing for multiple ceiling heights in one room

CATEGORY 03

Corner Details

Plans 41 – 60 detail every type of inside and outside corner, from standard two-stud configurations to bullnose and specialty trim profiles.

#041 Standard Inside Corner — Two-Stud Configuration

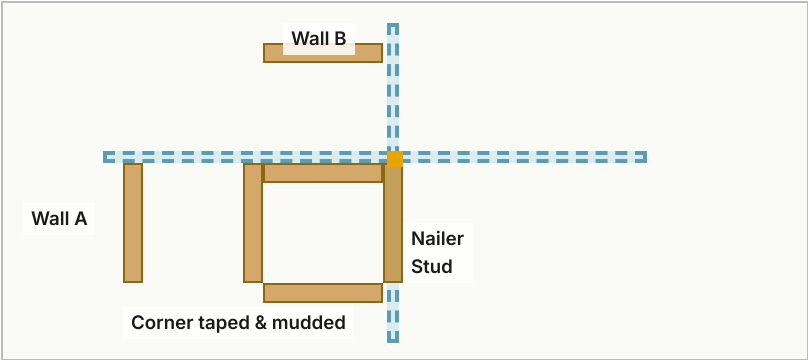

Standard inside corner formed by intersecting walls. Second stud or nailer provides backing for the abutting drywall edge. Paper tape in corner joint.


MATERIALS

- Additional nailer stud (or clips)
- Paper tape (inside corner)
- Joint compound
- Standard 1/2" gypsum

SPECIFICATIONS

Config	2-stud with nailer
Tape	Paper (folded)
Gap	1/8" max at corner

#042 Three-Stud Inside Corner (California Corner)

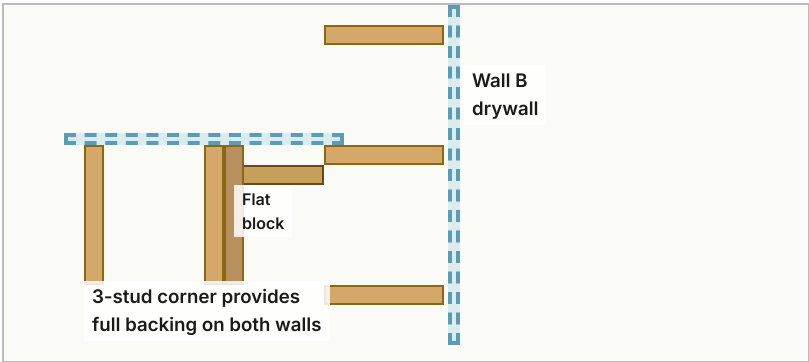

Three-stud corner provides nailing surface on both walls. Also called "California corner." Uses a flat 2x block between two end studs. More lumber, better backing.


MATERIALS

- 3 studs at corner
- Flat blocking 2x4
- Paper tape
- Joint compound

SPECIFICATIONS

Backing	Full on both walls
Insulation	Reduced cavity
Best for	Drywall finishers

#043 Outside Corner with Metal Corner Bead

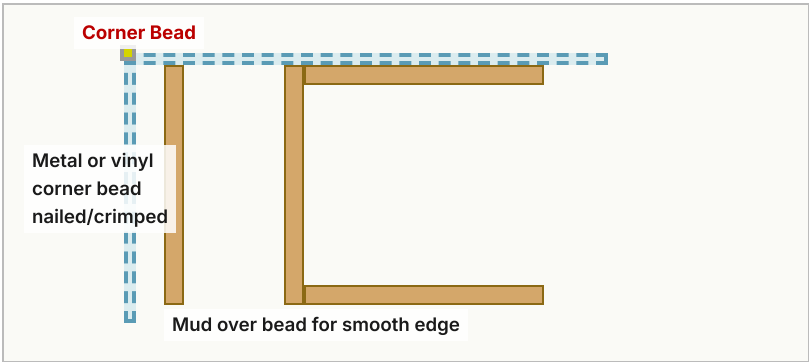

Outside corner protection using metal or vinyl corner bead. Attached with nails, screws, or crimp tool. Provides straight, durable edge that is mudded and sanded smooth.

MATERIALS

- Metal corner bead (or vinyl)
- 1-1/2" nails or staples
- Joint compound (3 coats)
- Standard drywall both faces

SPECIFICATIONS

Bead type	Metal / Vinyl / Paper-faced
Fastening	Nails 9" OC or crimped
Mud coats	3 coats min.

Plans 44 – 60: Quick Reference


#	Plan Title	Description
044	Drywall Clips (No Nailer Needed)	Metal clips eliminate need for backing stud
045	Bullnose Corner Bead	Rounded outside corner profile using bullnose bead
046	Paper-Faced Corner Bead (Flex)	Flexible paper-flanged bead for off-angle corners
047	L-Bead at Free Edge	Exposed drywall edge terminated with L-trim
048	J-Bead at Dissimilar Material	Transition trim where drywall meets tile/wood/stone
049	Reveal Trim at Ceiling Line	Shadow reveal between wall and ceiling planes
050	Four-Way Corner Intersection	Where four walls meet at a cross (+) plan
051	Acute Angle Corner (<90°)	Drywall meeting at angles less than 90 degrees
052	Obtuse Angle Corner (>90°)	Drywall meeting at angles greater than 90 degrees
053	Ceiling-to-Wall Inside Corner	Horizontal-to-vertical transition detail
054	Floating Corner (Stress Relief)	No fasteners near corner to prevent cracking
055	Back-Blocked Corner Joint	Backing strip behind joint for crack resistance
056	Tear-Away Bead (Temporary Edge)	Removable bead for clean edge during construction
057	Archway Corner Bead (Flexible)	Kerfed or vinyl bead for curved arch edges
058	Control Joint (Expansion)	Zinc or vinyl control joint for long wall runs
059	Stairwell Corner Detail	Angled wall-to-ceiling corner at stair rake
060	Corner Bead Repair / Replacement	Removing damaged bead and reinstalling new

CATEGORY 04

Arch & Curved Wall Construction

Plans 61 – 78 cover archway framing, curved walls using kerfed studs, flexible drywall techniques, and specialty radius work.

#061 Simple Archway Framing

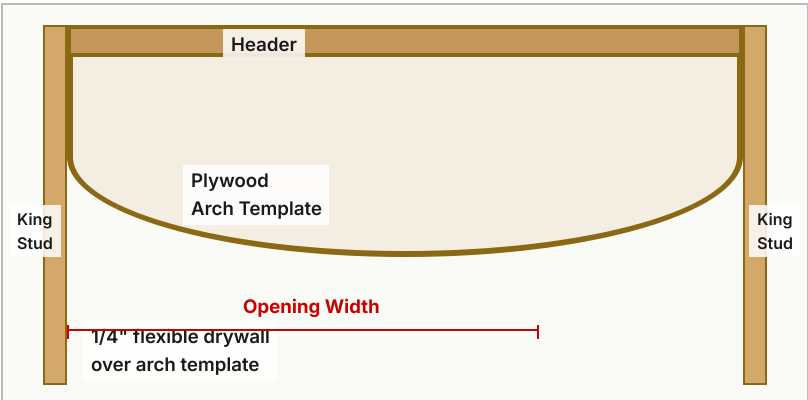

Archway formed by cutting plywood or hardboard templates to desired curve, fastening to king studs and header. 1/4" flexible drywall bent over the arch form.


MATERIALS

- 1/2" plywood (arch templates x2)
- 2×4 or 2×6 blocking
- 1/4" flexible drywall
- Flexible corner bead
- 1" drywall screws

SPECIFICATIONS

Min. radius	Per board flexibility
Template	2 plywood cutouts
Soffit board	1/4" or double 1/4"
Bead	Flex vinyl or kerfed metal

#062 Curved Wall with Kerfed Metal Studs

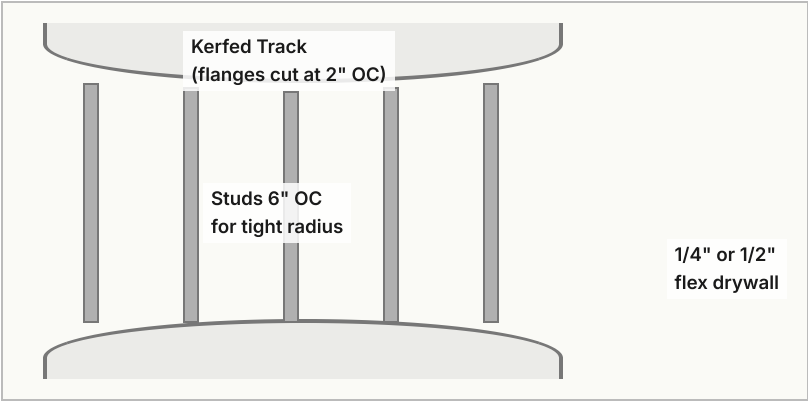

Curved wall using kerfed (snipped) metal track at top and bottom. Flanges are cut every 2" to allow the track to bend. Studs placed at reduced spacing (6" OC) for tight radii.


MATERIALS

- Metal track (kerfed every 2")
- 3-5/8" metal studs (6" OC)
- 1/4" flexible gypsum board
- Type S screws

SPECIFICATIONS

Stud spacing	6" OC (tight) / 8" (gentle)
Kerf interval	2" on center
Min. radius	~24" with 1/4" board
Layers	2× 1/4" recommended

#063 Flexible Drywall on Curves — Wet Bending Technique

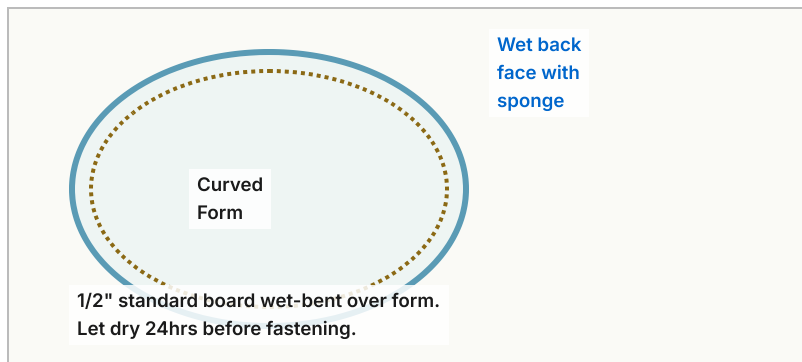

Standard 1/2" drywall can be wet-bent for gentle curves (radius 5'+). Wet the back paper with a sponge, drape over a curved form, and allow to dry 24 hours before installing.

MATERIALS

- 1/2" standard gypsum board
- Water and sponge
- Curved plywood form
- Temporary bracing / straps

SPECIFICATIONS

Min. radius (1/2")	5' wet-bent
Min. radius (1/4")	2' dry-bent
Dry time	24 hours minimum
Alternative	Score back every 1"

Plans 64 – 78: Quick Reference


#	Plan Title	Description
064	Kerfed Wood Stud Curved Wall	Saw-kerfed 2x4 studs bent to radius on curved plates
065	Compound Curve (S-Curve Wall)	Alternating convex/concave curves in one wall run
066	Half-Round Column Wrap	Drywall wrapped around semicircular column
067	Full-Round Column Enclosure	360-degree drywall column with metal framing
068	Elliptical Arch	Non-circular arch with varying radius template
069	Gothic / Pointed Arch	Pointed arch with two radius centers
070	Eyebrow Arch (Partial Curve)	Subtle curve above window/door with straight sides
071	Barrel Vault Hallway	Full semicircular ceiling down a corridor
072	Coved Ceiling Transition	Concave curve from wall to ceiling (no hard corner)
073	Serpentine Partition	Free-standing wavy display wall
074	Radius Soffit / Bulkhead	Curved soffit around kitchen island or bar
075	Niche with Arched Top	Recessed wall niche with curved header
076	Curved Stair Bulkhead	Drywall following a curved staircase from above

CATEGORY 05

Bulkheads & Soffits

Plans 79 – 96 cover framing for bulkheads, soffits, and dropped ceiling sections used to conceal ductwork, plumbing, and structural elements.

#079 Standard Bulkhead / Soffit Framing

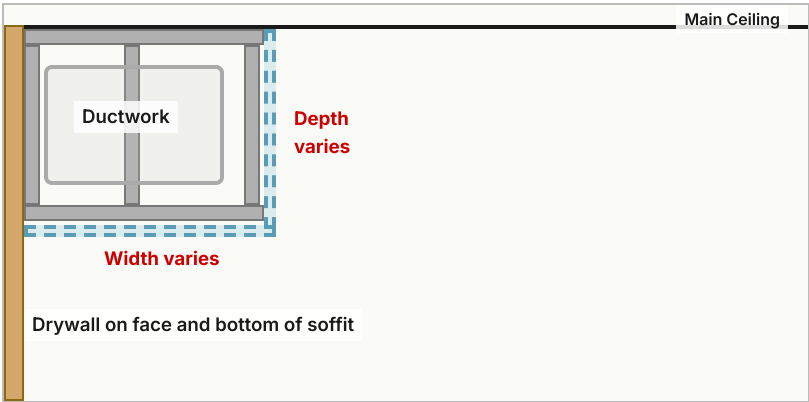

Basic bulkhead/soffit to conceal ductwork, pipes, or beams. Framed with metal track and studs. Drywall on exposed face and bottom.


MATERIALS

- Metal track (top/bottom)
- Metal studs (vertical drops)
- 1/2" gypsum board
- Corner bead at all edges

SPECIFICATIONS

Max depth	Per obstruction + 1"
Stud spacing	16" or 24" OC
Attachment	Track to ceiling framing
Corner bead	All outside corners

#080 L-Shaped Soffit (Two-Sided)

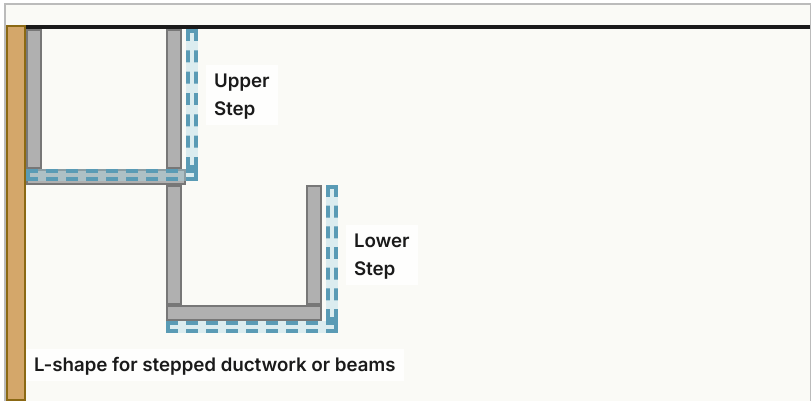

L-shaped soffit accommodates stepped obstructions or creates architectural detail. Two connected box-outs at different depths from the ceiling.


MATERIALS

- Metal track and studs
- 1/2" gypsum board
- Corner bead (all outside edges)
- Blocking at transition

SPECIFICATIONS

Steps	2 levels
Corner bead	All 4+ outside corners
Blocking	At step transition

#081 Soffit with Recessed Lighting Prep

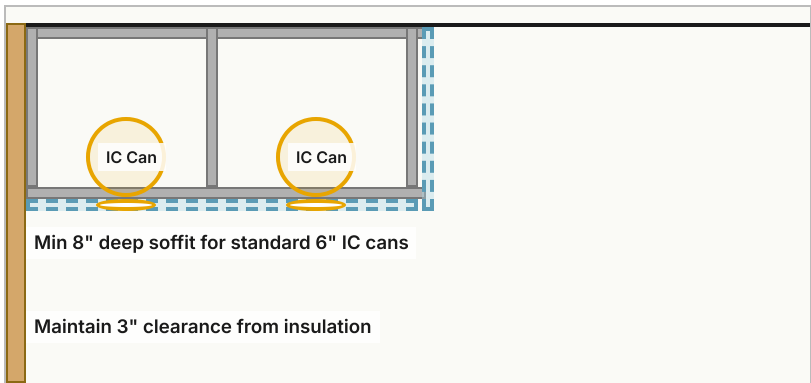

Soffit designed to house IC-rated recessed light fixtures. Minimum 8" depth for 6" cans. Pre-plan cutout locations before drywalling bottom.

MATERIALS

- Metal track and studs
- 1/2" gypsum board
- IC-rated recessed light housings
- 14/2 NM-B wiring (by electrician)

SPECIFICATIONS

Min depth	8" (for 6" cans)
IC clearance	0" to insulation (IC rated)
Cutout dia.	Per fixture template
Spacing	Fixture layout plan

Plans 82 – 96: Quick Reference


#	Plan Title	Description
082	Kitchen Cabinet Soffit	Soffit above kitchen wall cabinets to ceiling
083	HVAC Duct Chase (Horizontal)	Horizontal chase for supply/return ductwork
084	Beam Wrap (Structural I-Beam)	Drywall enclosure around exposed steel beam
085	Perimeter Cove Light Soffit	Soffit with LED cove lighting recess
086	Mechanical Closet Bulkhead	Bulkhead in closet for HVAC equipment above
087	Stair Landing Bulkhead	Enclosed soffit at stair landing from above
088	Bathroom Exhaust Fan Soffit	Soffit routing for bath fan ductwork
089	Range Hood Duct Chase	Vertical/horizontal chase for range hood duct
090	Sprinkler Pipe Soffit	Concealing fire sprinkler main piping
091	Garage Door Header Soffit	Soffit concealing header above garage door track
092	Window Valance Box	Recessed box for curtain rod or blind mechanism
093	Dropped Ceiling over Tub/Shower	Lower ceiling section in wet area
094	T-Bar to Drywall Transition	Where suspended tile ceiling meets drywall soffit
095	Two-Sided Floating Bulkhead	Island bulkhead not touching walls
096	Curved / Radius Soffit	Soffit following a curved plan (kitchen island)

CATEGORY 06

Fire-Rated Assemblies

Plans 97 – 116 cover UL-listed fire-rated wall and ceiling assemblies from 1-hour to 4-hour ratings using Type X and Type C gypsum board.

#097 1-Hour Fire-Rated Wall — Single Layer 5/8" Type X

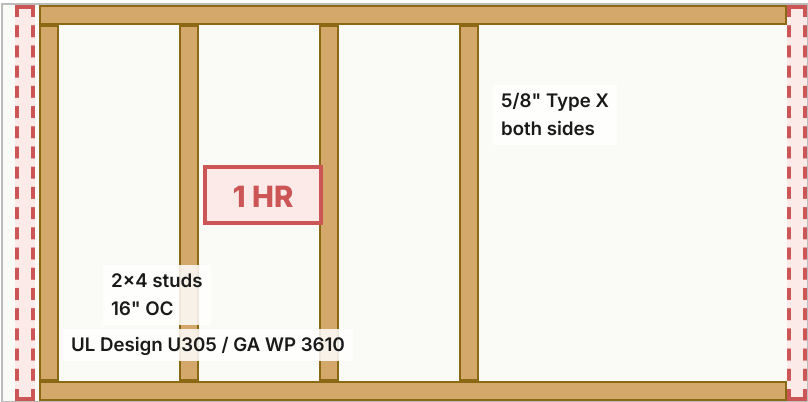

Basic 1-hour fire-rated wall: single layer of 5/8" Type X gypsum board each side of 2×4 wood studs at 16" OC. Meets IBC requirements for many residential and light commercial separations.


MATERIALS

- 5/8" Type X gypsum board (both sides)
- 2×4 studs at 16" OC
- 2-1/4" drywall screws
- Fire-rated joint compound

SPECIFICATIONS

Fire rating	1 hour
STC	33 – 38
UL Design	U305
Screw length	2-1/4" min.

#098 2-Hour Fire-Rated Wall — Double Layer 5/8" Type X

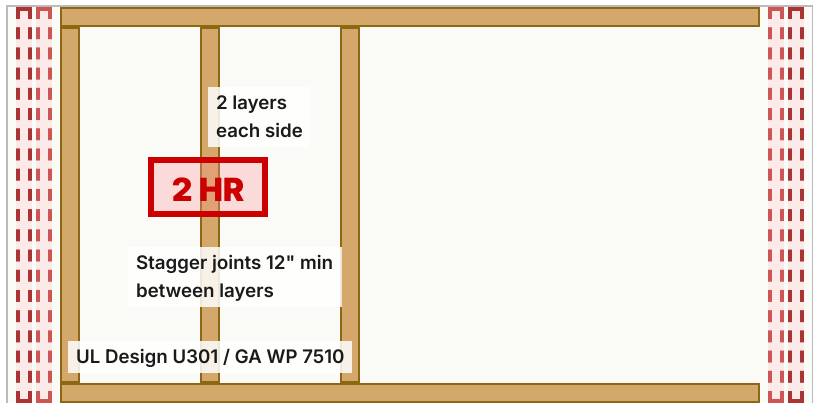

2-hour fire-rated wall: two layers of 5/8" Type X on each side. Base layer screwed to studs, face layer with longer screws or laminated. Joints staggered between layers.


MATERIALS

- 5/8" Type X gypsum (4 total layers)
- 2x4 studs at 16" OC
- 1" screws (base), 2-1/4" (face)
- Joint compound (fire-rated)

SPECIFICATIONS

Fire rating	2 hours
STC	40 – 46
Wall thickness	~6-1/2"
UL Design	U301

#099 1-Hour Fire-Rated Ceiling Assembly

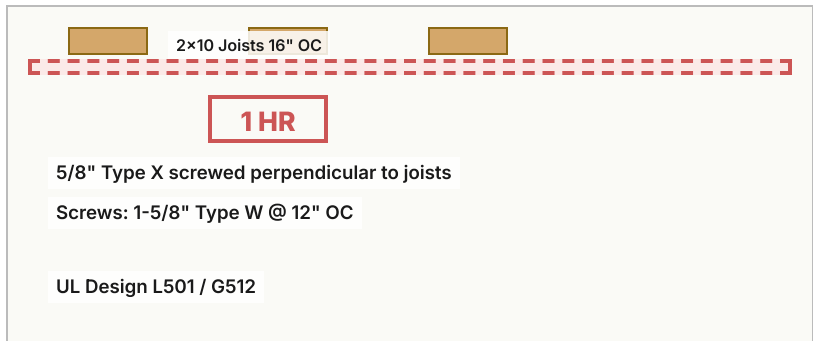

1-hour fire-rated ceiling using single layer of 5/8" Type X gypsum board applied perpendicular to wood joists at 16" OC. Required at garage ceilings per code.

MATERIALS

- 5/8" Type X gypsum board
- 1-5/8" Type W screws
- Joint tape and compound

SPECIFICATIONS

Fire rating	1 hour
Joist spacing	16" OC max
Screw spacing	12" OC along joists
Board orient.	Perpendicular to joists

Plans 100 – 116: Quick Reference


#	Plan Title	Description
100	1-HR Wall on Metal Studs	5/8" Type X each side of 3-5/8" steel studs
101	2-HR Ceiling (Double Type X)	Two layers Type X on ceiling joists
102	3-HR Wall Assembly	Three layers Type X each side; steel studs
103	4-HR Wall Assembly	Maximum rating; four layers Type C each side
104	Fire-Rated Shaft Wall	Liner panel + C-H stud for elevator/mechanical shaft
105	Fire-Rated Column Enclosure	Steel column wrapped in Type X layers
106	Fire-Rated Beam Enclosure	Steel beam encased in 2 layers Type X
107	Area Separation Wall (Townhouse)	H-stud assembly for party wall (2-HR)
108	Garage-to-House Separation	Garage ceiling & wall fire separation details
109	Fire Damper at Duct Penetration	Framing and sealing at rated wall duct opening
110	Electrical Box in Fire Wall	Putty pad and 24" offset for rated walls
111	Pipe Penetration Fire Stop	Firestop caulk and collar at pipe through rated wall
112	Door Frame in Fire Wall	Rated frame and hardware in fire-rated partition
113	Fire-Rated Soffit (1-HR)	Rated enclosure at corridor ceiling
114	Head-of-Wall Joint (Fire)	Top-of-wall to deck fire-rated joint detail
115	Bottom-of-Wall Fire Seal	Slab-to-wall fire caulk and backing detail
116	Fire-Rated Floor/Ceiling Assembly	Complete rated floor system (above & below)

CATEGORY 07

Soundproof Assemblies

Plans 117 – 136 provide acoustically-rated wall and ceiling assemblies from STC 39 to STC 63+, using insulation, resilient channels, double studs, and mass-loaded materials.

#117 Standard Insulated Wall — STC 39-43

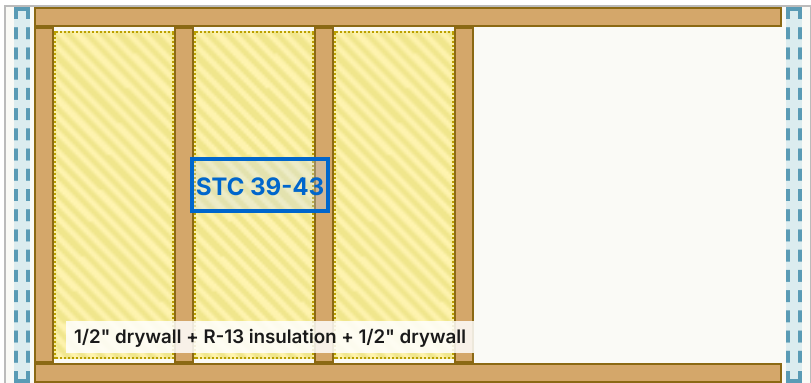

Basic sound-rated wall. Single-layer 1/2" drywall each side with R-13 fiberglass batt insulation in the cavity. Meets minimum code for dwelling unit separation in many jurisdictions.


MATERIALS

- 1/2" gypsum board (both sides)
- R-13 fiberglass batt insulation
- 2×4 studs at 16" OC
- Acoustical sealant at perimeter

SPECIFICATIONS

STC rating	39 – 43
Wall thickness	4-1/2"
Key factor	Insulation + sealed gaps

#118 Resilient Channel Wall — STC 45-52

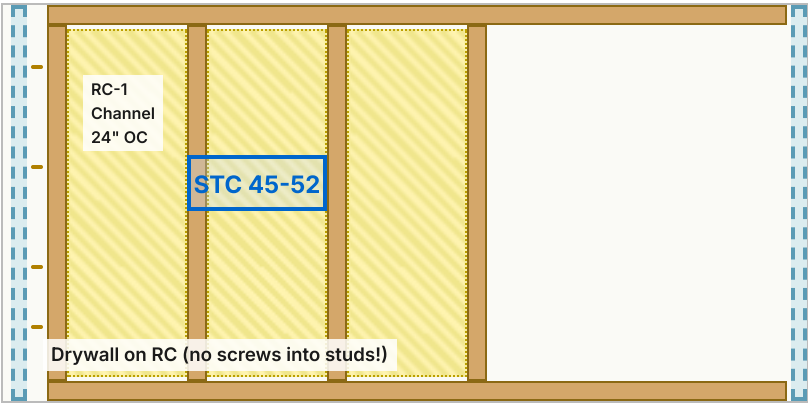

Resilient channel (RC-1) on one side decouples drywall from studs. Critical: screws must only engage the channel flange, never the stud behind it. Insulation fills the cavity.


MATERIALS

- 1/2" or 5/8" gypsum board
- RC-1 resilient channel (24" OC)
- R-13 insulation
- 1" screws into RC only
- Acoustical sealant

SPECIFICATIONS

STC rating	45 – 52
RC spacing	24" OC horizontal
Key rule	No screw-to-stud contact
Sealant	All perimeter joints

#119 Double Stud Wall — STC 55-60

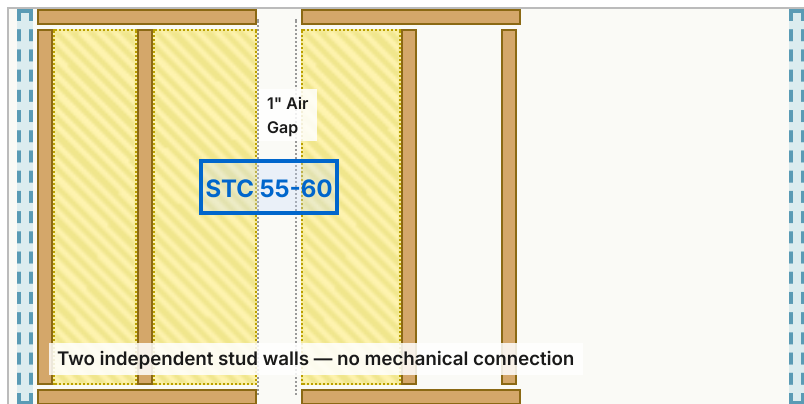

Two completely independent stud walls with a 1" minimum air gap. No mechanical connection between the two frames. Insulation in both cavities. Premium acoustic performance.

MATERIALS

- 5/8" gypsum board (both faces)
- 2×4 studs (2 sets, 16" OC)
- R-13 insulation (both cavities)
- Acoustical sealant
- Separate top/bottom plates

SPECIFICATIONS

STC rating	55 – 60
Total width	~10"
Air gap	1" minimum
Connection	None between walls

Plans 120 – 136: Quick Reference

#	Plan Title	Description
120	Staggered Stud Acoustic Wall	2×4 studs staggered on 2×6 plate (STC 46-50)
121	Double Drywall + RC Wall	Two layers Type X on RC one side (STC 52-56)
122	Mass-Loaded Vinyl (MLV) Wall	1 lb/sqft MLV behind drywall (STC 50-55)
123	Acoustic Ceiling (RC Below Joists)	Resilient channel on ceiling joists (STC/IIC upgrade)
124	Sound Isolation Clips Wall	Commercial-grade clips replacing RC (STC 55-62)
125	Double Stud + Double Drywall	Ultimate acoustic wall (STC 63+)
126	Acoustic Floor/Ceiling (IIC Rated)	Impact insulation class upgrade for upper floors
127	Studio Isolation Room	Room-within-a-room concept with floating floor
128	Acoustic Sealant Detail	Proper sealant application at all perimeter joints
129	Outlet Box Acoustic Treatment	Putty pads and offset box placement for sound walls
130	Door Seal for Sound Wall	Acoustic door sweep, seals, and solid-core door
131	Green Glue Compound Application	Viscoelastic damping compound between drywall layers
132	Acoustic Caulk at Penetrations	Sealing pipes, wires, and boxes in sound-rated walls


#	Plan Title	Description
133	Hotel-Grade Partition (STC 55+)	Commercial hotel room dividing wall assembly
134	Conference Room Partition	Commercial meeting room STC 50+ wall
135	Ceiling Sound Mat System	Acoustic floor mat above ceiling drywall
136	HVAC Noise Mitigation at Wall	Duct penetration treatment for sound walls

CATEGORY 08

Moisture Barrier Details

Plans 137 – 154 cover wet-area installations, vapor barriers, cement board backing, and moisture management strategies for drywall assemblies.

#137 Tub / Shower Surround with Cement Board

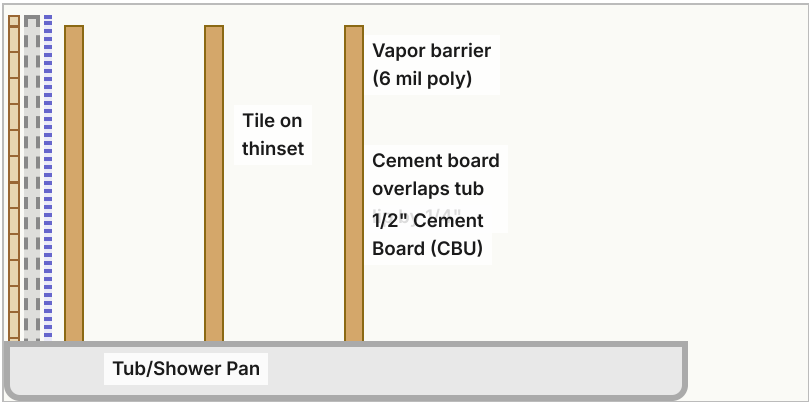

Wet-area wall using cement backer board (CBU) over vapor barrier. Never use standard drywall in direct wet areas. Cement board overlaps tub lip. Tile applied with thinset mortar.


MATERIALS

- 1/2" cement backer board (CBU)
- 6-mil polyethylene vapor barrier
- 1-1/4" cement board screws
- Alkali-resistant mesh tape
- Thinset mortar + tile

SPECIFICATIONS

Board type	Cement or fiber cement
Overlap at tub	1/4" over lip
Gap at tub	1/4" (caulked)
Never use	Standard or MR drywall

#138 Vapor Barrier on Exterior Wall

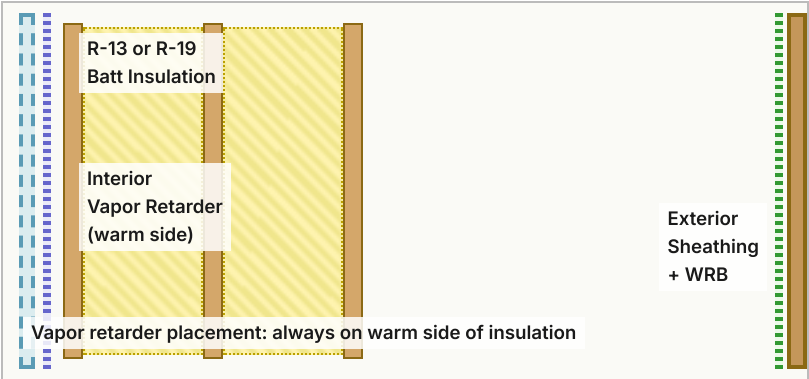

Exterior wall moisture management with vapor retarder on the warm (interior) side of insulation in cold climates. WRB (weather-resistive barrier) on the exterior sheathing.


MATERIALS

- 1/2" gypsum board (interior)
- 6-mil polyethylene (cold climate)
- R-13 or R-19 batt insulation
- Exterior sheathing + WRB

SPECIFICATIONS

VR location	Warm side (interior in cold)
VR type	Class I or II per climate
Seal	Acoustic sealant at edges
Hot-humid	No interior VR (Class III)

#139 Basement Wall Moisture Protection

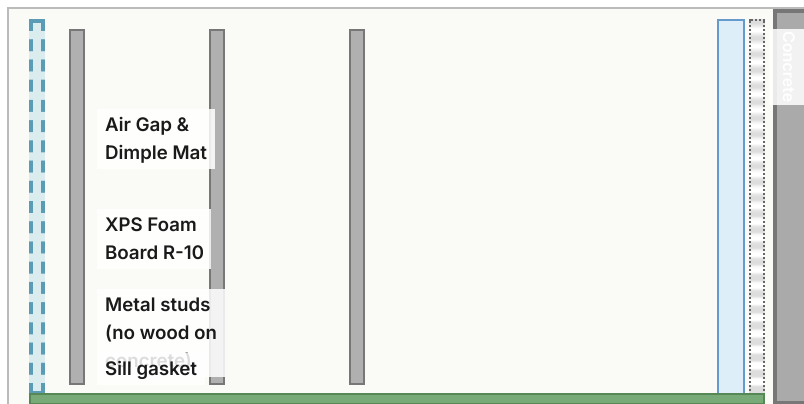

Basement finishing with moisture management. Dimple membrane on concrete creates air gap. Rigid foam insulation, then metal studs (no wood against concrete) and mold-resistant drywall.

MATERIALS

- Mold-resistant gypsum board
- Dimple membrane
- 2" XPS foam board (R-10)
- Metal studs (no wood on concrete)
- Sill gasket tape

SPECIFICATIONS

Board type	Mold/moisture resistant
Insulation	R-10 min (code varies)
Air gap	Dimple mat or 3/4" gap
Studs	Metal preferred over wood

Plans 140 – 154: Quick Reference

#	Plan Title	Description
140	Moisture-Resistant (Green Board) Areas	MR drywall in bathrooms outside direct wet zones
141	Mold-Resistant (Purple Board) Install	Fiberglass-faced board for high-humidity areas
142	Tile Backer at Kitchen Backsplash	CBU behind kitchen tile with moisture management
143	Waterproof Membrane (Kerdi/RedGard)	Liquid or sheet membrane over CBU in showers
144	Steam Shower Vapor Barrier	Complete vapor seal for steam room enclosure
145	Laundry Room Moisture Detail	Moisture management behind washer/dryer area
146	Exterior Gypsum Sheathing	Glass-mat exterior sheathing under WRB/cladding
147	Crawl Space Vapor Barrier	Below-floor moisture barrier and venting strategy
148	Drywall-to-Slab Connection (Sealed)	Moisture break at bottom plate on concrete slab
149	Window Condensation Detail	Moisture management at window jamb/sill


#	Plan Title	Description
150	Exhaust Fan Duct through Wall	Sealed penetration for bath/kitchen exhaust duct
151	Sill Pan Flashing at Window	Sub-sill membrane and weep detail
152	Roof Leak Indicator Strip	Visual inspection detail above ceiling drywall
153	Ice Dam Prevention at Eave	Air sealing and insulation at eave-to-wall junction
154	Pool Room / Natatorium Wall	Heavy-duty vapor barrier for indoor pool enclosure

CATEGORY 09

Door & Window Framing

Plans 155 – 174 cover rough openings, headers, sills, cripple studs, and specialty door installations including pocket and sliding barn doors.

#155 Standard Door Framing with Header

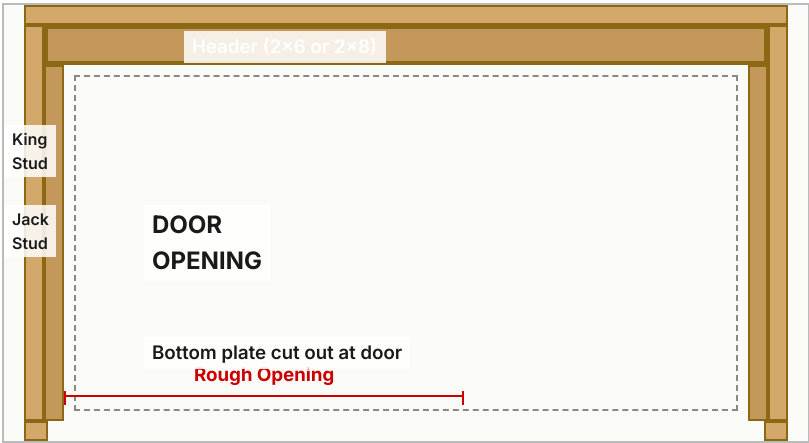

Standard interior door rough opening. King studs run full height; jack (trimmer) studs support the header. Bottom plate is cut out after wall is stood. Header size per span tables.

MATERIALS

- 2x4 king studs (full height)
- 2x4 jack/trimmer studs
- Header (2x6, 2x8, or LVL)
- 1/2" plywood spacer (if needed)

SPECIFICATIONS

Rough opening	Door + 2" W x 1" H
Header (non-bearing)	Flat 2x4 OK
Header (bearing)	Per span table
Jack stud	Nailed to king stud

#156 Window Framing with Sill and Cripple Studs



Window rough opening with header above, sill plate below, king and jack studs at sides, and cripple studs above header and below sill to maintain stud spacing layout.


MATERIALS

- 2×4 king studs, jack studs
- Header (per span requirement)
- 2×4 sill plate (flat or on edge)
- 2×4 cripple studs

SPECIFICATIONS

Rough opening	Window + 1/2" each side
Header	Per load/span table
Sill	Flat 2×4 (non-bearing)
Cripples	Match stud spacing

#157 Pocket Door Framing

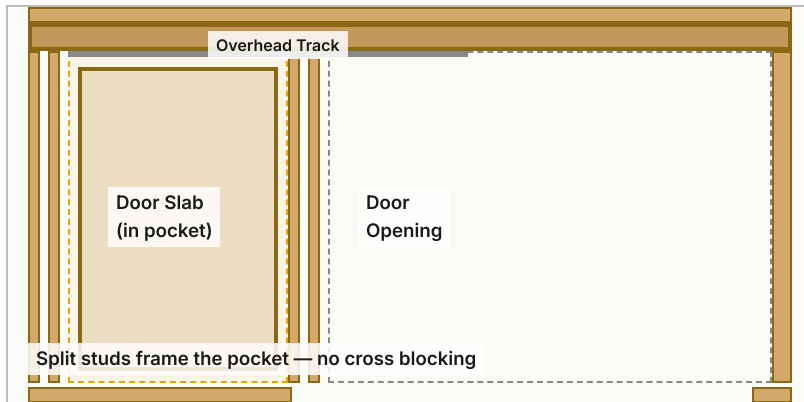

Pocket door requires double-width framing: half for the pocket cavity, half for the door opening. Split studs (two 2×2 or 1x) frame the pocket. Header spans the full width. No mid-height blocking in the pocket.

MATERIALS

- Pocket door frame kit (track + hardware)
- Split studs (2×2 or ripped 2×4)
- Header spanning full opening + pocket
- 1/2" drywall on split stud faces

SPECIFICATIONS

Rough opening	2x door width + 1"
Pocket depth	Door width + 1/2"
Wall thickness	Min 4-1/2" (2×4 wall)
No blocking	Keep pocket cavity clear

Plans 158 – 174: Quick Reference


#	Plan Title	Description
158	Double Door / French Door Framing	Wide opening with cased header for double doors
159	Sliding Barn Door Blocking	Header blocking for surface-mounted barn door track
160	Bi-Fold Door Framing	Standard closet opening with track prep
161	Metal Stud Door Frame (Jamb Stud)	Reinforced jamb studs in steel framing
162	Sidelite (Sidelight) Framing	Narrow fixed glass panel beside entry door
163	Transom Window above Door	Glass panel or vent window above door header
164	Arched Door / Window Top	Curved header for arched door or window
165	Cased Opening (No Door)	Finished opening without door, header exposed
166	Pass-Through / Serving Window	Counter-height opening between kitchen and dining
167	Clerestory Window Framing	High window near ceiling line
168	Bay Window Framing (Interior)	Drywall return at angled bay window

CATEGORY 10

Electrical & Plumbing Boxing

Plans 175 – 200 cover enclosures, chases, and drywall details for electrical panels, plumbing stacks, medicine cabinets, and other service penetrations.

#175 Electrical Panel Boxing / Enclosure

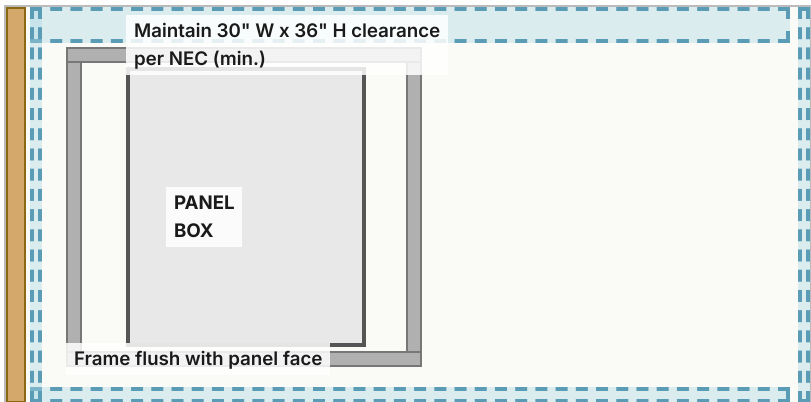

Drywall enclosure around electrical panel. Frame flush with panel face so panel cover sits properly. Maintain NEC-required working clearances (30"W x 36"H x 36"D minimum).


MATERIALS

- Metal studs/track for frame
- 1/2" gypsum board
- J-bead or L-bead at panel edge
- Corner bead at outside corners

SPECIFICATIONS

NEC clearance	30"W x 36"H x 36"D
Flush to panel	Drywall flush w/ panel face
Edge trim	J-bead or L-bead
Access	Panel door must open 90°+

#176 Pipe Chase Construction

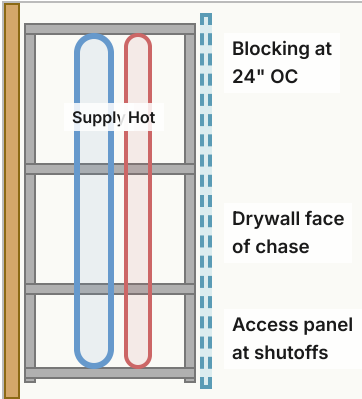

Vertical or horizontal pipe chase to conceal supply, drain, and vent piping. Size chase for largest pipe plus 1" clearance. Include access panel at shutoff valves.


MATERIALS

- Metal studs/track (chase frame)
- 1/2" gypsum board (face)
- Blocking at 24" OC
- Access panel (at valves)
- Firestop (at floor penetration)

SPECIFICATIONS

Chase size	Largest pipe + 1" min
Access panel	At all shutoffs/cleanouts
Blocking	24" OC for drywall support
Firestop	At every floor penetration

#177 Recessed Medicine Cabinet Framing

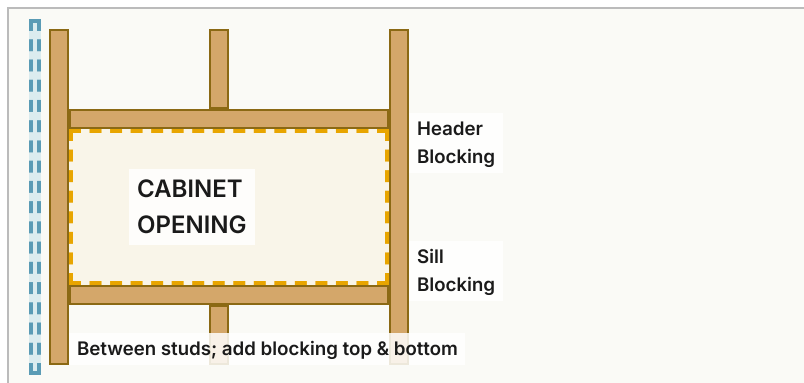

Recessed medicine cabinet installed between studs. Add horizontal blocking at top and bottom of cabinet opening. If cabinet is wider than one bay, cut and reframe with new studs.

MATERIALS

- 2×4 horizontal blocking (header/sill)
- Additional studs if wider than 14.5"
- Drywall cut to cabinet template
- Trim or flange to cover gap

SPECIFICATIONS

Standard width	14.5" (single bay)
Depth	3.5" (2×4 wall)
Blocking	Screwed to studs
Height	Per cabinet spec

Plans 178 – 200: Quick Reference

#	Plan Title	Description
178	Electrical Box Cutout Detail	Proper cutout sizing and placement for outlet boxes
179	Low-Voltage Box (Data/AV)	Old-work ring and drywall cutout for low-voltage
180	Recessed Outlet (Behind TV)	In-wall power kit recessed box framing
181	Water Heater Enclosure	Drywall closet around water heater with clearances
182	Furnace / HVAC Closet	Utility closet framing with combustion air provisions
183	Washer Box (Valve Access)	Framed recess for washing machine valve box
184	Plumbing Stack Boxing	Vertical chase around main drain/vent stack
185	Toilet Flange Backing	Blocking and drywall detail behind wall-mount toilet
186	Shower Valve Access Panel	Removable panel behind shower valve
187	Bathtub Drain Access	Access panel at tub trap location
188	HVAC Register Box	Framing around supply/return air registers
189	Range Hood Duct Boxing	Enclosing range hood exhaust duct run
190	Radon Mitigation Pipe Chase	Vertical chase for radon vent pipe

#	Plan Title	Description
191	Central Vacuum Inlet Framing	Low-voltage inlet and pipe in wall cavity
192	Intercom / Doorbell Recess	Recessed housing for smart doorbell or intercom
193	Fire Sprinkler Head Clearance	Drywall around recessed fire sprinkler head
194	Smoke Detector Backing	Ceiling blocking for hardwired smoke detector
195	Exhaust Fan Housing (Ceiling)	Framing and clearance for ceiling exhaust fan
196	Whole-House Fan Framing	Large ceiling opening for attic fan
197	Structured Wiring Panel Recess	Recessed enclosure for home network panel
198	EV Charger Backing Plate	Plywood backing in garage wall for EV charger mount
199	Sump Pump Access Enclosure	Removable panel enclosure around sump pit
200	Multi-Service Utility Wall	Combined electrical, plumbing, and HVAC chase wall

Your Next Step

You now have 200 professional blueprints covering every major drywall assembly, detail, and technique. Use these as your on-site reference for framing, finishing, and specialty installations.

Start with the assemblies most relevant to your current project. Each blueprint provides the dimensions, materials, and specifications you need to execute with confidence.

Put These Blueprints to Work

Print the plans you need, keep this guide on your device at the job site, and reference the detailed schematics for every framing and finishing decision.

DRYWALL PRO