产 品 规 格 承 认 书
(APPROVE SHEET)

客　　户: （CUSTOMER）	
品　　名: (DESCRIPTION NO)	液压方框散热风扇
型　　式: （TYPE）	5V/8000RPM
规　　格: （MODEL NO）	LD3007MS
客 户 料 号: (CUSTOMER NO)	0
日　　期: (DATE)	2026/4/23
图　　号: (OUR DRAWING NO)	M000
版　　本: （EDITION）	0

客户承认栏 CONFIRMATION SIGNATURE		供应商确认栏 LESCOTT SIGNATURE		
		核准 APPD	审核 EDAM	制表 DRAW
本承认书内容若贵司确认无误 请于上方承认栏内签字盖章寄回 **Please confirm your acceptance of this approval sheet by return fax**				

SPECIFICATION FOR APPROVAL

产品规格承认书

项目 ITEMS	单位 UNIT	参数 PARAMETERS
1. 机 构 Mechanical		
1-1. 外观尺寸 External dimension	mm	30*30*7MM
1-2. 外 框 Fan Frame	--	环保
1-3. 扇 叶 Fan Impeller	---	环保
1-4. 重量 Weight	g	7.6g
1-5. 轴承 Bearing	---	☑液压含油轴承 ☐sleeve ☐ Dual Ball
1-6. 导 线 Lead Wire	1571/26#	☑Red(+) ☑Black(-)
1-7. 套管 Bushing	---	☐PVC 套管 ☐GF 玻纤套管 ☑HST 热缩套管
2. 电气特性 Electrical characteristics(在通风及额定电压条件下 in free air at rated voltage)		
2-1. 额定电压 Rated voltage	VDC	5V/DC
2-2. 额定电流 Rated current	Amp	0.10A
2-3. 标签电流 Label Current	Amp	0 A
2-4. 额定输入功率 Rated input power、	Watt	0.5W
2-5. 锁固保护 Locked Motor Protection	Auto Restart	☐Yes ☑ NO Auto Restart
2-6. 马达保护 Motor Protection	Polarity Protection	☐Yes ☑ NO Polarity Protection
2-7. 缓 启 动 Soft Start	---	☐Yes ☑ NO S-S
2-8. 转速感应 FG Sensor	Tachometer Sensor	☐Yes ☑ NO Tachometer Sensor
2-9. 锁固报警 RD Alarm	Locked Motor Alarm	☐Yes ☑ NO Locked Motor Alarm
2-10. 转速控制 PWM Control	---	☐Yes ☑ NO
3. 安规规格 Safety Approval	☐ UL ☐ TUV ☑ CE	
4. 效率 Efficiency		
4-1. 风扇转数速 Rated speed(范围 range)	rpm	8000RPM±10%
4-2. 最大风量 Maximum air flow	CFM	2.28CFM
4-3. 最大静压 Maximum static air pressure	mmH2o	2.4mmH2O
4-4. 噪音分贝 Accoustic sound vel	d BA	27 dBA（MAX28）
5. 特性规格 Characteristics		
5-1. 操作电压 Operating voltage range	VDC	3V～5.5V (At 25℃ Relative Humidty65% ）
5-2. 起动电压/DUTY Staring voltage/duty	VDC/duty	3V(ON/OFF)/duty30%MAX
5-3. 锁定电流 Locked current	Amp	0.0A↓
5-4. 操作温度 Operating temperature	℃	-10℃~+70℃
5-5. 储存温度 Storage temperature	℃	-40℃+85℃
5-6. 环境湿度测试 Environment humidity		65%(RH)70℃ for 24 hours
5-7. 绝缘阻抗强度 Insulation resistance		在本体与两条导线间加 500V 直流电压之绝缘阻抗 10MΩ以上 At least 10MΩ at 500 VDC between housing and both lead wires

5-8. 预期寿命(MTBF)：指在额定电压及正常温度，湿度条件下连续运转。

Life ecpectance:continuous operation at rated voltage and normal temperature & humidity

5-9. 液压轴承预期寿命：40000 小时

sleeve Dual Ball bearing life expectance:40000Hours

5-10. 噪音测试说明 Accoustic sound level test descriptions

以额定电压在噪音实验室中测试背景噪音 19 分贝


悬吊 Suspension

At rated voltage in sound proof room

Background noise:19 dBA

1M → 麦克风感应器 通风状态

MIC. Sensor Free air



<---------- 1 mtr.---------- >

5-11. 特性定义 Characteristics definition:

5-11-1. 额定电流 & 额定转速 & 额定操作功率，须在额定电压下；马达连续转 3 分钟达到规格。

Rated current, rated speed, and rated input power shall reach reach standard of specification after 3 minutes continuous rotation at rated voltage and reach standard specification .

5-11-2. 起动电压是指当突然通电后能够使风扇起动之最低电压


Starting voltage is the least voltage that enables to start the fan by sudden power on.

6. 保护功能 Protection:

6-1. 风扇旋转锁定测试：将风扇通电锁死测试至少 72 小时，当锁定解除之后均仍然正常运转。

Fans spin lock test: Fan power will be tested at least 72 hours locked,when the lock is still after the lifting of the normal operation of

7. 外观尺寸图（Outline Dimension）

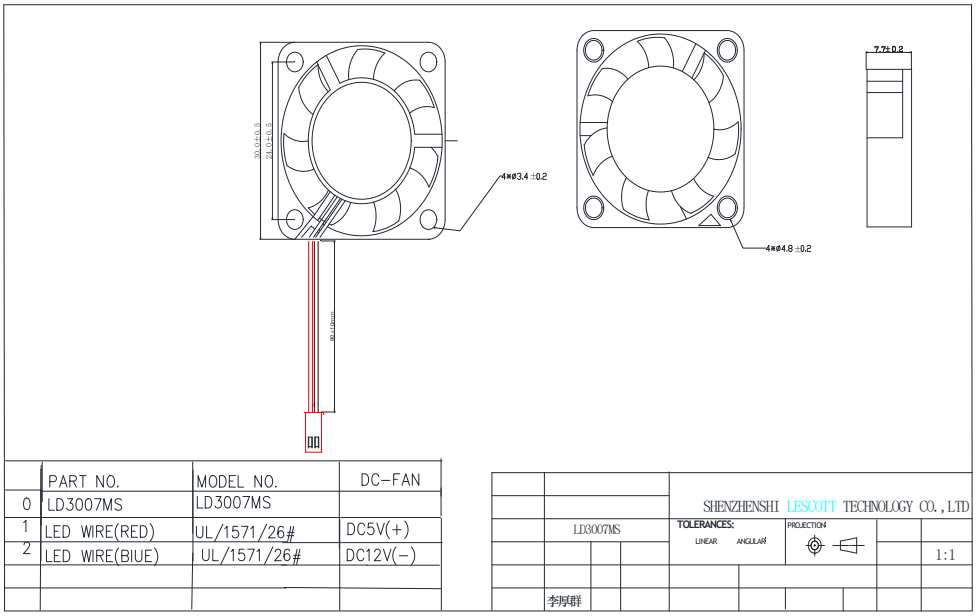

	PART NO.	MODEL NO.	DC-FAN
0	LD3007MS	LD3007MS	
1	LED WIRE(RED)	UL/1571/26#	DC5V(+)
2	LED WIRE(BIUE)	UL/1571/26#	DC12V(-)

LD3007MS

SHENZHENSHI LESCOTT TECHNOLOGY CO.,LTD

TOLERANCES: LINEAR ANGULAR


PROJECTION

1:1

李厚群

8. .P-Q 特性曲线图

测试数据（test data ）：	Max Ps :2.28 mmH2O	Max Flow Rate : 2.4CFM

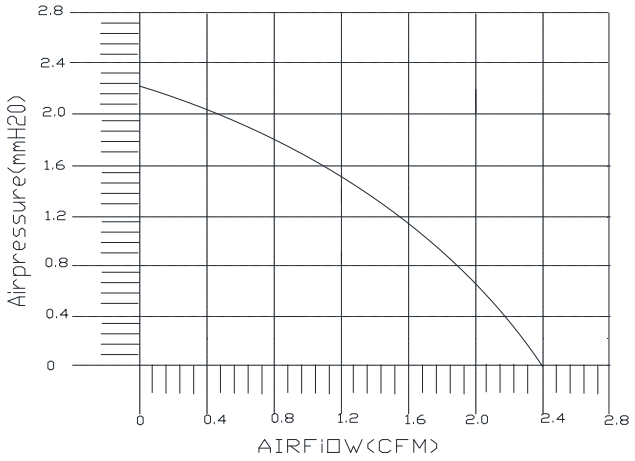



9.功能简介Function Instruction

9.1.信号输出 Signal Output

9.1.1 接线说明（FG/RD） Connection Instruction(FG/RD)


VFG= 5Vmax Rext（min）=VFG/Imax Imax=5mA Vce=0.5Vmax

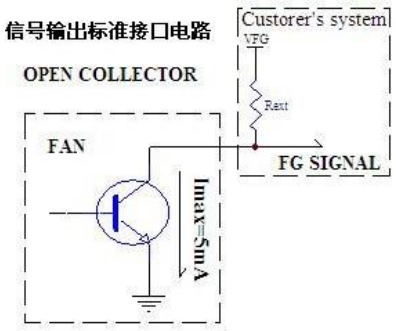



9.1.2 四级：每分钟的转速=方波频率*（120/磁极个数）；RPM=F* 120/4=30F

9.1.3 频率发生器波形（FREQUENCY GENERATOR WAVEFORM）：

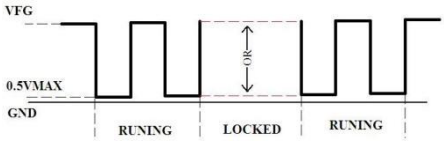

Note:


9.1.4. FG信号导线不能接触“+”和“-” 引线

FG signal wire can not contact with the "+" and "-" lead wire

9.1.5. 当风扇锁住时，FG信号的输出电压可能是VFG或0V（0.5Vmax）

When Fan is locking , the FG signal output voltage may be VFG or 0V（0.5Vmax）

9.2 风扇锁固报警 FAN Locked Motor Alarm（RD)

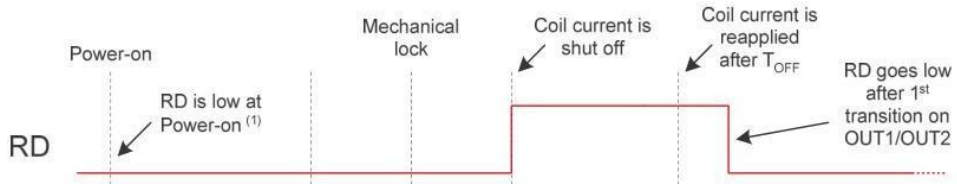


9.3速度控制 Speed Control(PWM)

PWM INPUT VOLTAGE HIGH----------V_{iH} =3V~5.5V

PWM INPUT VOLTAGE LOW----------V_{iL} =0V~0.5V

PWM INPUT FREQUENCY----------FPWM=18~30KHz

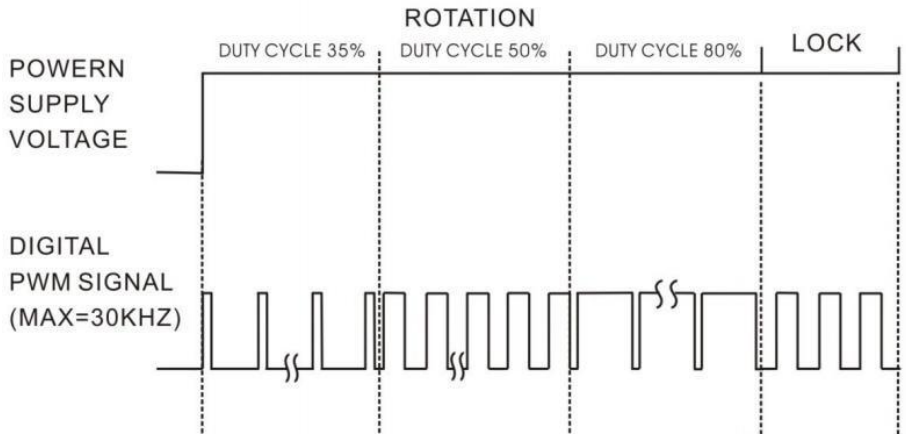

10.注意事项(Notes):

10-1. 使用时请勿超出本规格所规定之极限，否则我们不保证此产品

We will not guarantee the products if the application of our products are exceeded the limitation which is specified on this specification.

10-2. 倘若要变更此份文件的任何规格，请务必事先提出需求

In case of changes of the specification specified on this document.A written notice is requested in advance.

10-3. 请勿触压着叶片以及电源线缠绕着风扇或用力拉扯电源线，如此轴心与电源线将会被损毁

Please do not touch the impeller with the pressure and never bring the fan with lead wire.The bearing and lead wire may be damaged.

10-4. 本产品不保证因粉尘、水滴、小虫进入，而影响寿命与不良品产生

No guarantee on the products against the safety problem or failure caused by powder dust, drop of water or insect.

10-5. 如有任何资料及文件与此份资料不同，将以此份资料为主要参考

If there is any data or related documentation different from this data sheet.This data sheet is the principle reference.

10-6. 请勿在可燃性气体与任何有害环境中使用

Please do not use the fan in the environment of corrosive gas or liquid or any detrimental gas.

10-7. 当风扇于运转中，请勿企图将风扇锁死特别长的时间，如此，会因连续停止不转，产生高热而烧毁风扇

While the fan is in operation, please do not lock the fan intentionally for a long periods of time, since the continuous stoppage will result in overheat and thus burnt out the fan.

10-8. 组装风扇时，请特别注意，因共振或振动产生的噪音

During the installation of the fan, please pay substantial attention to possible notice caused by resonance vibration and shock.

10-9. 当搬运或作业中，风扇如从 60cm 的高度落下，将会对叶片的平衡产生若干影响，

It is very important to notify that avoid to drop from 60cm height when in any movement or operation,it will impact the balance of blade.

10-10. 锁外壳之螺丝扭力不得超 4Kgf

The torque of the screw which locked the frame should not exceed 4 Kgf

11. 风扇安装说明 Fan Installation Instructions:

11-1. 采用螺栓螺母紧固件时，底盘配合面平整度应保持在 0.1mm 以下。

In case of using bolt-nut fasteners, the flatness of chassis mating surfaces should be kept below 0.1mm.

11-2. 如果使用自攻螺钉，应使用符合 JIS B 1122 第 2 类的适当螺钉。推荐的自攻螺钉的尺寸详情见表（1）。每个紧固件孔只能拧紧一次，否则会发生滑动。此外，施加在自攻螺钉上的扭矩不得超过表（1）中规 定的值。

In case of using self-tapping screws, appropriate screws according to JIS B 1122 Type 2 should be used. The dimensional details of the self-tapping screws recommended are shown in Table(1). Each fastener hole should only be tightened once or slippage may occur. In addition, the torque to be applied to the self-tapping screws must not exceed the values stated in Table(1).

11-3. 紧固件头部的埋头部分不应干扰框架，否则会有断裂的风险[图（e）]。建议使用内表面平坦的紧固件头，即无埋头。

The countersunk part of fastener head should not interfere with the frame or there would be a risk of breakage [figure(e)]. Fastener head with flat inner surface, i.e. no countersunk, is recommended.

11-4 、在组装过程中不可强拉导线。如（图 g）所示 could not pull the wire strongly in assembly process. As shown in (Fig. g)

在组装过程中不可按压扇叶如（图 h）所示 Could not press the impeller's fringe in assembly

