CQRobot®

SPECIFICATION FOR APPROVAL

Customer:	
Customer P/N:	
Files No.:	
Model No.:	RB-4028004G-028R
Description:	
Specification:	4Ω 3W

Customer Authorization Signature	Supplier Audit		
	Approver	Checker	Author
	2019 - 12 -17		

Revision History

Version	Date	Description	Author
A0	September 01,2019		


Official Website: www.cqrobot.com Wiki: www.cqrobot.wiki

Above Measuring condition under temperature : 25~35℃ R.H. 25 ~75%. According to standard GB/T9396-1996					
	Model	RB-4028004G-028R			
1	Type	Dynamic Speaker			
2	Dimension	Outline Dimension Shall Be As Shown In Fig(1).			
3	Weight	Approx 12.9 Grams.			
4	Magnet	Material	Nd-Fe-B		
5	Impedance	4	± 15% Ohm at 1000Hz. 1V		
6	Power Rating	Normal	3.0W	Maximum	3.5W
7	FO	400±20% Hz at 1.0V			
8	S.P.L.	93±3dB/1.0Watt 0.1Meter. Average At1000,1200,1500,2000 Hz.			
		Measurement Method Shown In Fig(2).			
9	Frequency Range	180~15,000Hz.Average SPL-10dB. Frequency Response Fig (3).			
10	Distortion	10% Maximum At 1000Hz.1.0W.			
11	Abnormal Sound Test	Must be Normal Tested by	3.46	Volts. Sine wave for50~5kHz	
12	Polarity	Diaphragm Shall Move Forward When Apply a Positive DC.			
		Red "+" or" Marked" Terminal			
13	Operating Temperature	-25 ℃ to +65 ℃			
14	Storage Temperature	-25 ℃ to +65 ℃			

15	Reliable Test	
After any following test leave speakers at room temperature for 1 hour, SPL shall not deviate by±3 db from initial value		
15-1	Load Test	white noise for 96 hours at 3.0 W input power.
15-2	High Temperature Test	+65±2 ℃ 96hours
15-3	Low Temperature Test	-25±2 ℃ 96hours
15-4	Humidity Test	+40±2 ℃ relative humidity 90~95%R.H 96hours
15-5	Vibration Test	Frequency 30±15 Hz, Amplitude 1.5 mm for 2 Hours per axis(x. y. z axis)
15-6	Drop Test	75 CM free falling on Concrete floor, 10 times.
15-7	Temperature Cycle test	-25℃~+ 65 ℃ 5 Cycles Temperature test.


Model : RB-4028004G-028R

16: Drawing(Fig1) Unit: mm Tolerance:±0.3mm

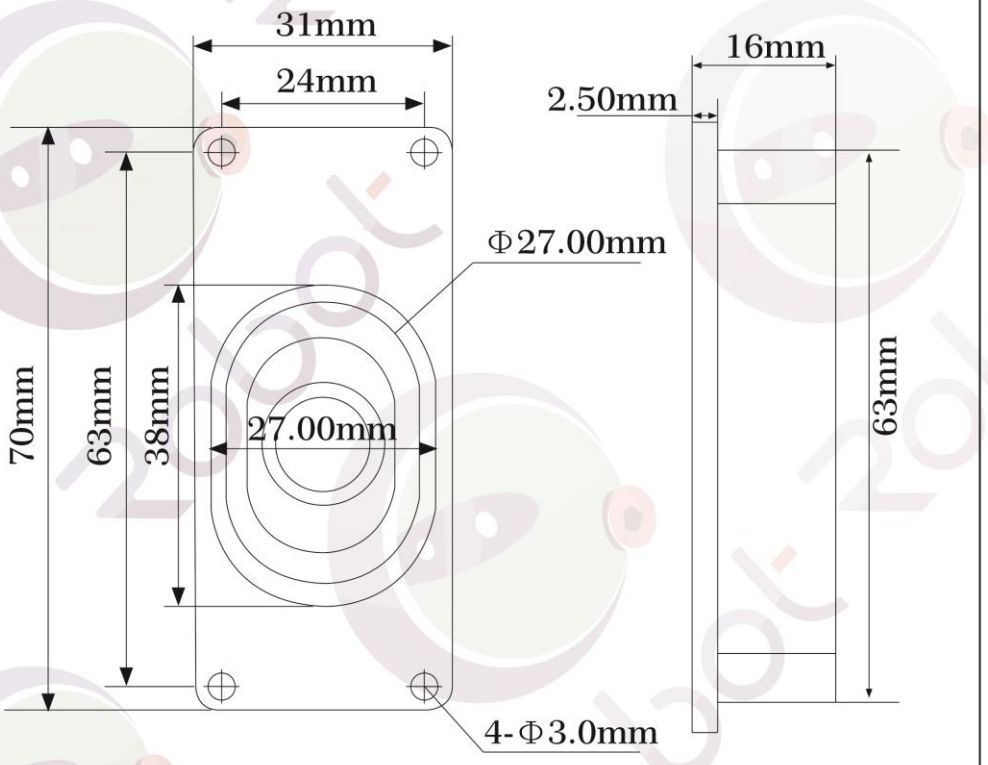


Official Website: www.cqrobot.com Wiki: www.cqrobot.wiki

18.Measurement Method Fig(2).

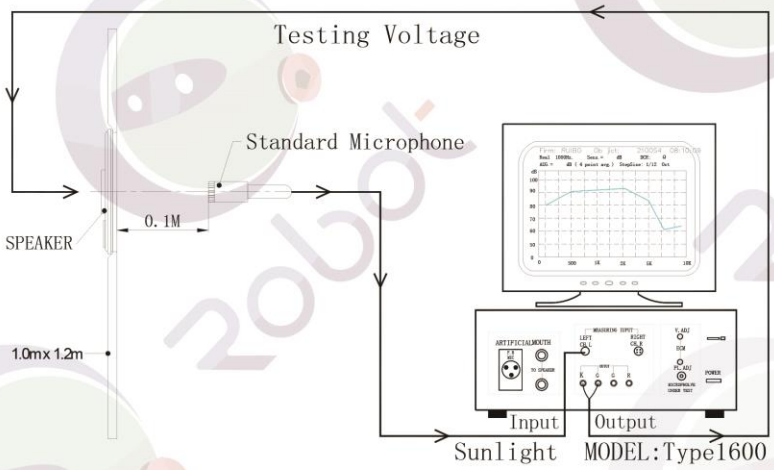


19. Test baffle Diagram

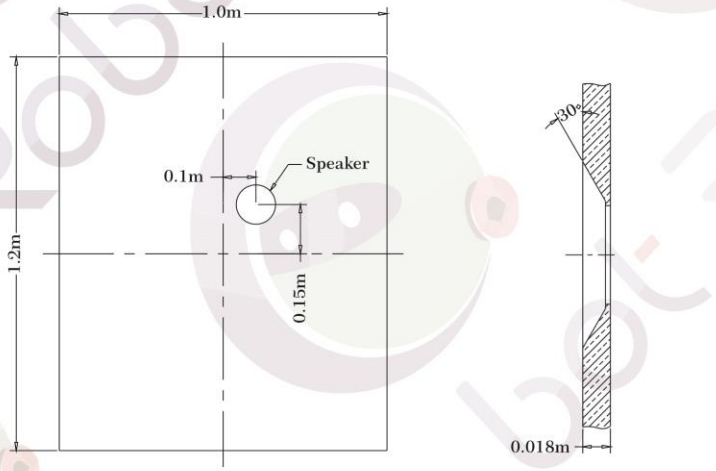

DATE	SPEC.NO	Version	Page
2019-12-17	SCM1560	A0	4/5

20.Frequency Resonance Fig (3).

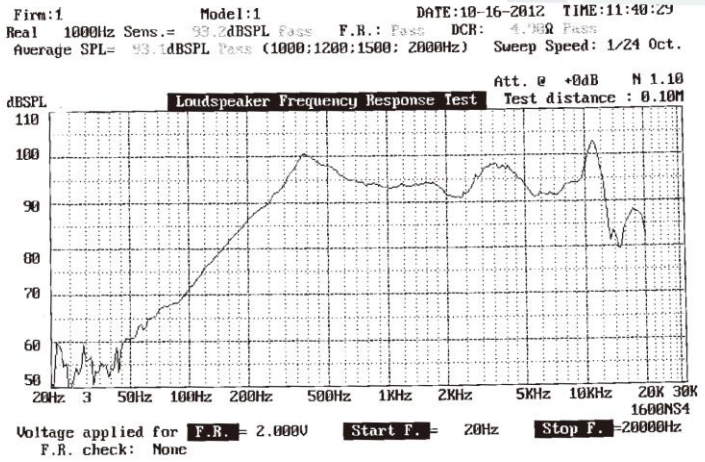

21. AC Impedance curve

