


SI Concentrator


Revision history

Date	Revision	Description
2025-03-15	01A	First revision.
2025-05-03	02A	- Pulldowns on discrete serial inputs. - Two more optional optocouplers. - Extra inversion before DL1000 transmitter. - Pot on LCD contrast pin. - Spaced DSUBs further apart. - Battery components made NM.


Serial port inputs

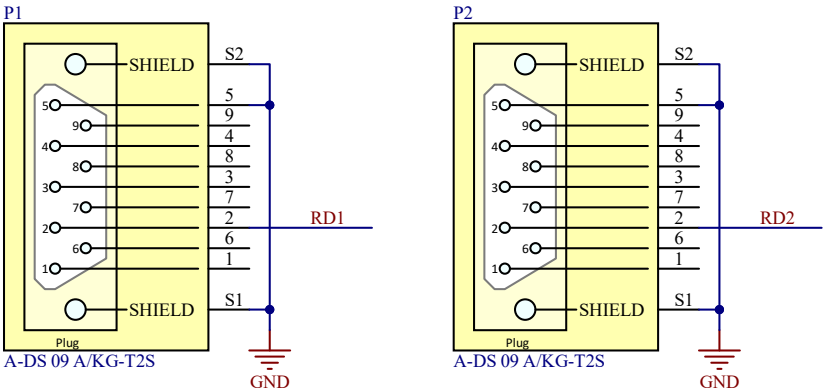


Serial port inputs, no connector footprints

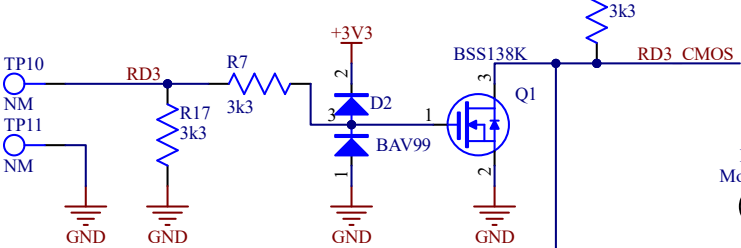



Alt. long-wire input

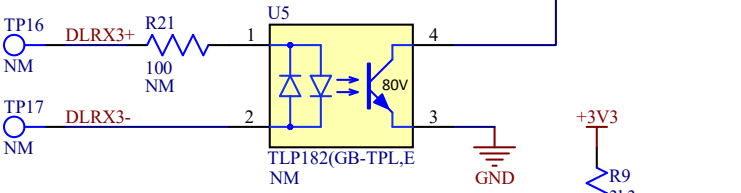

Alt. long-wire input

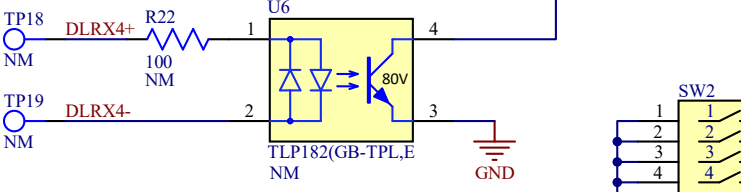


Main long-wire input

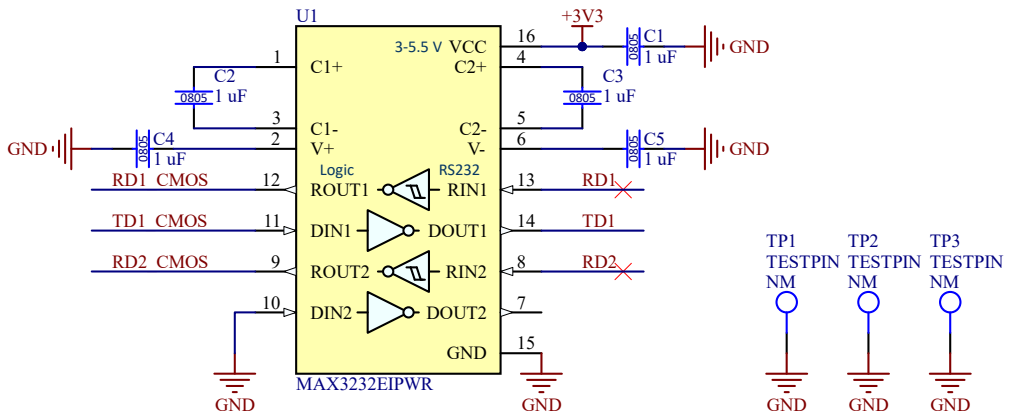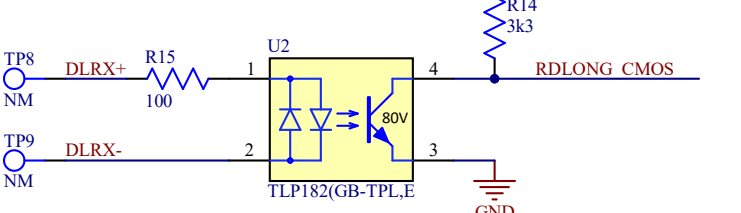


Either 3xAA batteries or a single LiPo cell can be used. Or a power bank connected to the Pi Pico USB port.


Battery Connector




LCD Backlight

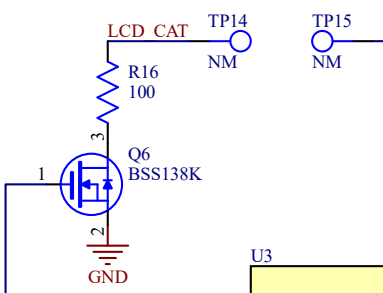


Optional config switches

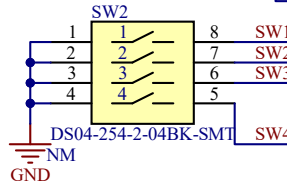




Serial port output

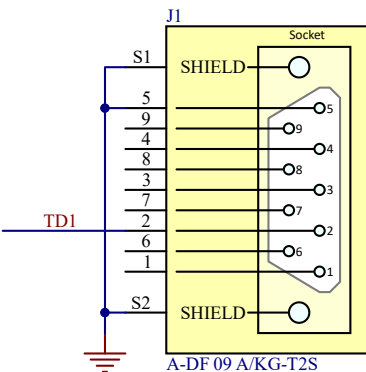

Long-wire transmitter

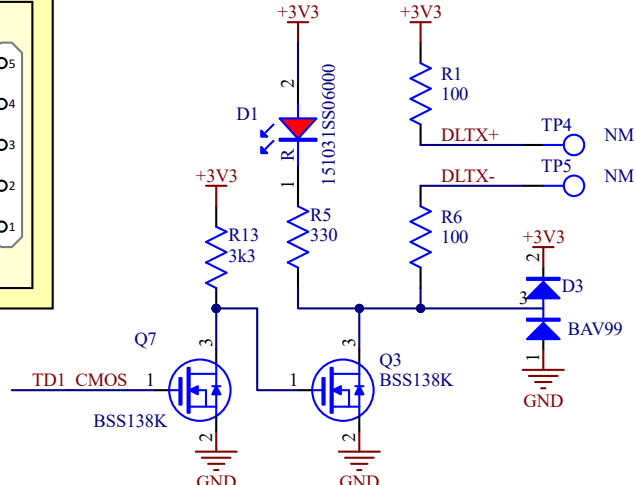

Power bank keep-alive circuit

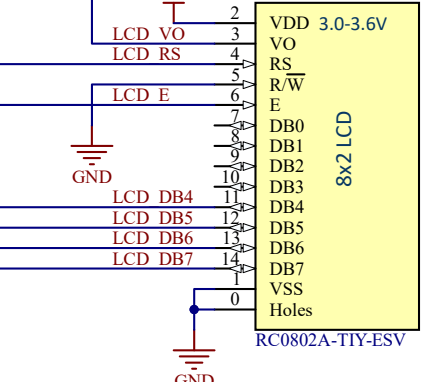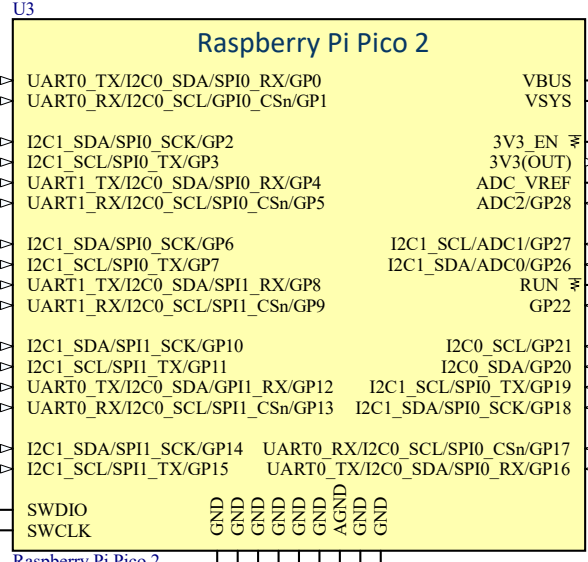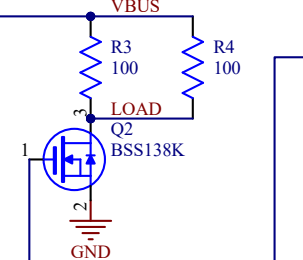

Project: SI Concentrator
Title: Front Page
Size: A4 Number: PCB2025-7 Revision: 02A Engineer: PM
Date: 2025-05-03 Time: 16:29:28 Sheet 1 of 1

