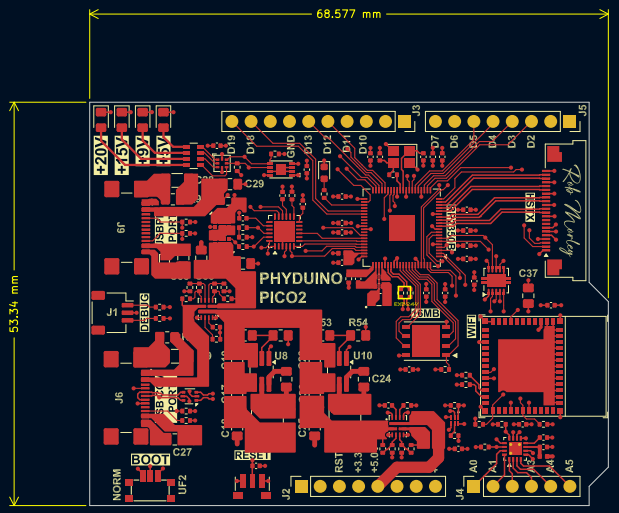


BOARD CHARACTERISTICS			
Copper layer count:	4	Board thickness:	1.6062 mm
Board overall dimensions:	68.5800 mm x 53.3400 mm		
Min track/spacing:	0.1500 mm / 0.1500 mm	Min hole diameter:	0.2000 mm
Copper finish:	ENIG	Impedance control:	No
Castellated pads:	No	Press-fit pads:	No
Plated board edge:	No	Edge card connectors:	No

Layer Name	Type	Material	Thickness	Color	Epsilon R	Loss Tangent
F.Silkscreen	Top silk screen	Not specified	Not specified	White	1	0
F.Paste	Top solder paste		Not specified		1	0
F.Mask	Top solder mask	Not specified	0.01 mm	Blue	3.3	0
F.Cu	Copper		0.035 mm		1	0
Dielectric 1	Prepreg	FR4	0.2104 mm	FR4 natural	4.29	0.02
In1.Cu	Copper		0.0152 mm		1	0
Dielectric 2	Core	FR4	1.065 mm	FR4 natural	4.29	0.02
In2.Cu	Copper		0.0152 mm		1	0
Dielectric 3	Prepreg	FR4	0.2104 mm	FR4 natural	4.29	0.02
B.Cu	Copper		0.035 mm		1	0
B.Mask	Bottom solder mask	Not specified	0.01 mm	Blue	3.3	0
B.Paste	Bottom solder paste		Not specified		1	0
B.Silkscreen	Bottom silk screen	Not specified	Not specified	White	1	0

University of Toronto, Dept of Physics

Sheet:

File: phyduino_pico2.kicad_pcb

Title: Phyduino Pico 2

Size: A4	Date: 2026-05-04	**Rev: A**
KiCad E.D.A. 10.0.1		Id: 1/1